

## **100 Series Fieldbus Module Upgrade Subsystem Overview**



*The I/A Series® 100 Series Fieldbus Module Upgrade subsystem allows you to convert existing I/A Series® systems with 100 Series FBMs and support equipment within your plant to use 200 Series FBMs and support equipment, while preserving much of the existing infrastructure and field I/O wiring.*

### **FEATURES**

Key features for the 100 Series Fieldbus Module Upgrade subsystem are as follows:

- ▶ Upgrade paths allow replacement of field input/output modules in strategic plant areas with minimal plant downtime
- ▶ Retains existing field I/O wiring, and shielded twisted-pair cables between Control Processors and Fieldbus Modules
- ▶ Upgrade path preserves, where possible, existing 100 Series Termination Cable Assemblies (TCA), and enclosures, for increased cost-effectiveness
- ▶ Replacement path replaces all 100 Series equipment and enclosures in sites requiring replacement of this equipment
- ▶ High performance Fieldbus Modules (FBMs) replace lower-performing FBMs, including any Main/Expander FBM pairs
- ▶ Optional redundant power and I/O hardware
- ▶ Variety of modular mounting configurations
- ▶ High performance, high accuracy, fast updates
- ▶ Reduced component count, for ultra-high reliability and quality

- ▶ Harsh (Class G3 - ISA S71.04) contamination protection
- ▶ Maintains existing power security and alarming
- ▶ Electrical isolation and field device power
- ▶ High-speed system communication.

## OVERVIEW

The I/A Series® 100 Series Fieldbus Module (FBM) Upgrade subsystem provides a complete line of equipment to upgrade sites with existing 100 Series FBMs and Termination Cable Assemblies (TCAs) to their 200 Series equivalents. This allows sites to easily add other 200 Series FBMs, if it becomes necessary to add a wider range of field devices.

The 200 Series FBMs<sup>(1)</sup> provide a range of functionality discussed in *DIN Rail Mounted Subsystem Overview* (PSS 21H-2W1 B3). They are designed to operate in conjunction with the following I/A Series control processors:

- ▶ Field Control Processor 280 (FCP280)
- ▶ Field Control Processor 270 (FCP270)
- ▶ Z-Module Control Processor 270 (ZCP270) with FCM100Es.

As a further enhancement, a HART solution has been provided for the FBM01, FBM04, FBM05 (replacement path only), and FBM37 modules by FBM214b, FBM244, FBM245, and FBM215 respectively.

Depending on the amount of existing 100 Series equipment you want to retain, different sets of equipment are provided; choose between the upgrade or replacement paths.

## Upgrade Path

To minimize plant downtime during the upgrade process and to maintain cost-effectiveness, the upgrade path preserves, where possible, the existing:

- ▶ 100 Series Termination Cable Assemblies (TCA) which provide the existing field I/O wiring
- ▶ Enclosures (Industrial Enclosures, Metal Enclosures, and Field Enclosures) in which the 100 Series FBMs are installed

Equipment that is required for the upgrade path, aside from the 200 Series FBMs, includes the following:

- ▶ Termination Assembly Adapter (TAA) modules accept the original 100 Series TCA termination connectors on their fronts. They interface between the field I/O wiring from the TCAs and the 200 Series FBMs in the new conversion mounting structures.



**Figure 1. Termination Assembly Adapter (TAA) Module**

- ▶ Conversion mounting structures, which provide a communications backplane for mounting the 200 Series FBMs, TAAs and other support modules. These mounting structures replace the original 100 Series mounting structures, and are provided in a series of upgrade kits. These new mounting structures have reduced depth, as compared with the depth of the mounting structures they replace. After the upgrade process, additional space in the rear of these mounting structures may be available for additional equipment, cabling, or air flow.

(1) The FBM22 - A/M station, Coriolis FBM, and HTG FBM - does not have a replacement 200 Series FBM. As well, any instances of an FBM17 using Equipment Control Block 34 (ECB34) do not have a replacement solution.

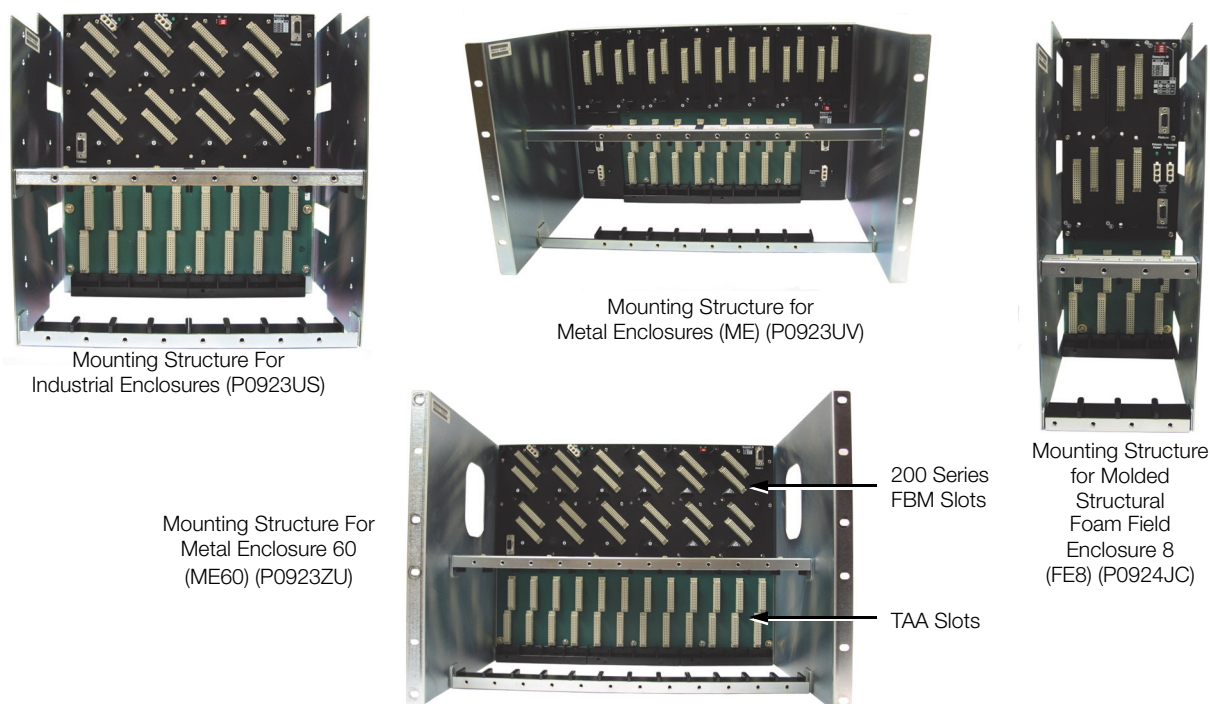


Figure 2. Conversion Mounting Structures (Used in Upgrade Path)

- ▶ Fieldbus Isolators (FBI200 and FBI200A) replace the 100 Series FBI and enable distant communications between the 200 Series FBMs in the conversion mounting structures and their FCP280s, FCP270s, or ZCP270s.
- ▶ 240 W power supply (FPS240-24) and 120 W power supply (FPS120-24) are available to support the conversion mounting structures.

Existing sites must upgrade their:

- ▶ Control Processors to the FCP280, FCP270, or ZCP270
- ▶ Network to The MESH control network to enable communications for this new hardware. The network and its associated available equipment is discussed in *The MESH Control Network Architecture* (PSS 21H-7C2 B3) and *The MESH Control Network Ethernet Equipment* (PSS 21H-7C3 B4).

## Replacement Path

In some sites, it may not be desirable to retain the original infrastructure of TCA cables and power supplies, due to the age and condition of this equipment. In these situations, the replacement path allows sites to replace the equipment used with the original 100 Series FBM subsystem entirely.

This new equipment includes the 200 Series FBMs and the following:

- ▶ 200 Series Termination Assemblies (TAs) which accept field I/O wiring and connect directly to the 200 Series FBMs (without the need for TAAs, which are used in the upgrade path). The field I/O wiring must be removed from the existing 100 Series TCAs and attached to the 200 Series TAs.

- ▶ New Fieldbus Isolator (FBI200) enables distant communications between the 200 Series FBMs in the conversion mounting structures and their Control Processors (FCP280 or CP270).
- ▶ 400 W power supplies (FPS400-24) to support the DIN rail mounted baseplates in which the 200 Series FBMs will be installed. The 240 W power supplies (FPS240-24) and 120 W power supplies (FPS120-24) are also available.
- ▶ Switches and support equipment to build The MESH control network, discussed in *The MESH Control Network Architecture* (PSS 21H-7C2 B3) and *The MESH Control Network Ethernet Equipment* (PSS 21H-7C3 B4).
- ▶ New equipment must be installed in an enclosure which is rated for supporting the 200 Series DIN rail mounted equipment - the G-Series enclosures are recommended. Refer to *G-Series Enclosures Overview* (PSS 21H-2X8 B3) for a list of these enclosures.

### Control Processor Upgrade (For Both Paths)

The new upgrade hardware operates with the FCP280 as is, as the FCP280 requires I/A Series software, version 9.0 or later.

When the new upgrade hardware operates with the FCP270 or ZCP270, these control processors require I/A Series software, version 8.6 or later.

As existing sites may have earlier versions of I/A Series software:

- ▶ Sites with CP60 or earlier CPs must plan to upgrade their CPs to the FCP280 or CP270.
- ▶ Sites which incorporate the new 100 Series upgrade hardware must upgrade their control systems with I/A Series software v8.6 or later for CP270s, or v9.0 or later for FCP280s.
- ▶ Sites may need newer I/A Series workstations to support this latest software.

### DIN RAIL MOUNTED FIELDBUS MODULE MOUNTING

The backplane on which the DIN rail mounted Fieldbus Modules mount depends on whether you are using the upgrade or replacement path.

For the *upgrade* path, the FBMs use Termination Assembly Adapters (TAAs) to connect to existing 100 Series Termination Cable Assemblies. The FBMs mount on the conversion mounting structures, which also provide mounting connectors for the TAAs, as shown in Figure 2.

The conversion mounting structures are compatible with existing DIN I/O subsystems and include the following:

- ▶ Primary and secondary 24 V dc power connections
- ▶ Two Module Fieldbus connections (for A/B Module Fieldbus daisy chain)
- ▶ Power/communication connection and field I/O connection for each FBM
- ▶ DIP switch for baseplate identification
- ▶ Adding additional baseplates without removing the system from service (requires redundant Module Fieldbus).

Refer to *100 Series Conversion Mounting Structures* (PSS 21H-2W8 B4) for additional information on the conversion mounting structures.

For the *replacement* path, the 200 Series FBMs mount on specially designed Modular Baseplates described in *DIN Rail Mounted Modular Baseplates* (PSS 21H-2W6 B4).

FBMs can be removed from a conversion mounting structure or Modular Baseplate without removing or disturbing external field device wire terminations or internal cable terminations or connections.

Shielded twisted-pair cables for conversion mounting structure and Modular Baseplate interconnections are available in various lengths of 0.25 m (10 in) up to 60 m (198 ft). The maximum shielded twisted-pair cable length interconnecting all baseplates is 305 m (1000 ft). The maximum HDLC cable length is 60 m (198 ft).

### **FIELD I/O TERMINATIONS**

Field I/O signal connections to the DIN rail mounted FBMs are made depending on the type of upgrade

- ▶ For the *upgrade* path, via existing 100 Series Termination Cable Assemblies (TCA); removing their termination connectors from the 100 Series FBMs and attaching them to the new Termination Assembly Adapter (TAA) modules on conversion mounting structures.
- ▶ For the *replacement* path, via 200 Series termination assemblies (TAs) mounted on DIN rails within or external to the enclosure. Termination assemblies are connected to their FBM's Modular Baseplate by dedicated cables, which can be 0.5 m (1.7 ft) up to 30 m (100 ft) in length. These various cable lengths allow the termination assemblies to be mounted in the same enclosure as the FBMs, or in an adjacent enclosure.

Analog and discrete I/O FBMs are used with specific termination assemblies to handle a variety of input/output signals. When used in high voltage applications, discrete I/O termination assemblies adapt the module to 120 V ac, 125 V dc, or 240 V ac inputs and outputs.

### **ENCLOSURES**

Enclosures extend the design of the DIN rail mounted FBMs by providing a range of mounting options to match application requirements.

For the upgrade path, the 100 Series FBM Upgrade subsystem equipment can be installed in existing I/A Series enclosures in the customer's site. These include:

- ▶ Industrial Enclosures (IE) - discussed in *Molded Structural Foam Enclosures* (PSS 21H-5B1 B3)
- ▶ Industrial Enclosure Metal Front Access (IEMFA) and the Industrial Metal Front and Rear Access (IEMFR) - discussed in *System Equipment Installation* (B0193AC)
- ▶ Sealed Metal Field Enclosure 8 - discussed in *Metal Field Enclosure 8 and Metal Enclosures P42, P43 and P371* (PSS 21H-5C1 B3)
- ▶ P42, P43 and P371 Metal Enclosures - discussed in *Metal Field Enclosure 8 and Metal Enclosures P42, P43 and P371* (PSS 21H-5C1 B3)
- ▶ Fieldbus Module Metal Enclosure 60 - discussed in *Fieldbus Module Metal Enclosure 60* (PSS 21H-5C1 B4)
- ▶ Molded Structural Foam Field Enclosure 8 (FE8) - discussed in *Molded Structural Foam Enclosures* (PSS 21H-5B1 B3)

Refer to *100 Series Conversion Mounting Structures* (PSS 21H-2W8 B4) to determine the conversion mounting structures needed to replace these enclosures.





For the replacement path, the 100 Series Upgrade subsystem equipment can be installed in new G-Series enclosures, which include DIN rails for mounting DIN rail mounted equipment, power supplies, and terminal blocks for connection of line power. For additional information regarding G-Series enclosures, refer to the *G-Series Enclosures Overview* (PSS 21H-2X8 B3).

### **DISTRIBUTED LOCAL/REMOTE MOUNTING**

Innovative design of the equipment packaging allows the DIN rail mounted Fieldbus Modules to be distributed closer to the process without special environmentally conditioned control or equipment rooms. Multiple control network configurations can be designed using the Ethernet fiber optic cables and switches. This allows construction of small-to-large size systems located within one or more mounting areas.

For the *upgrade* path, Figure 6 and Figure 8 show two basic network configurations that can be implemented for the 100 Series Fieldbus Module Upgrade subsystem, using conversion mounting structures. Both of these configurations allow the FBMs to be remotely mounted with the I/A Series control processor mounted in a separate location (FCP280, FCP270, or ZCP270).


For the *replacement* path, similar configurations use Modular Baseplates, as described in *DIN Rail Mounted Subsystem Overview* (PSS 21H-2W1 B3).

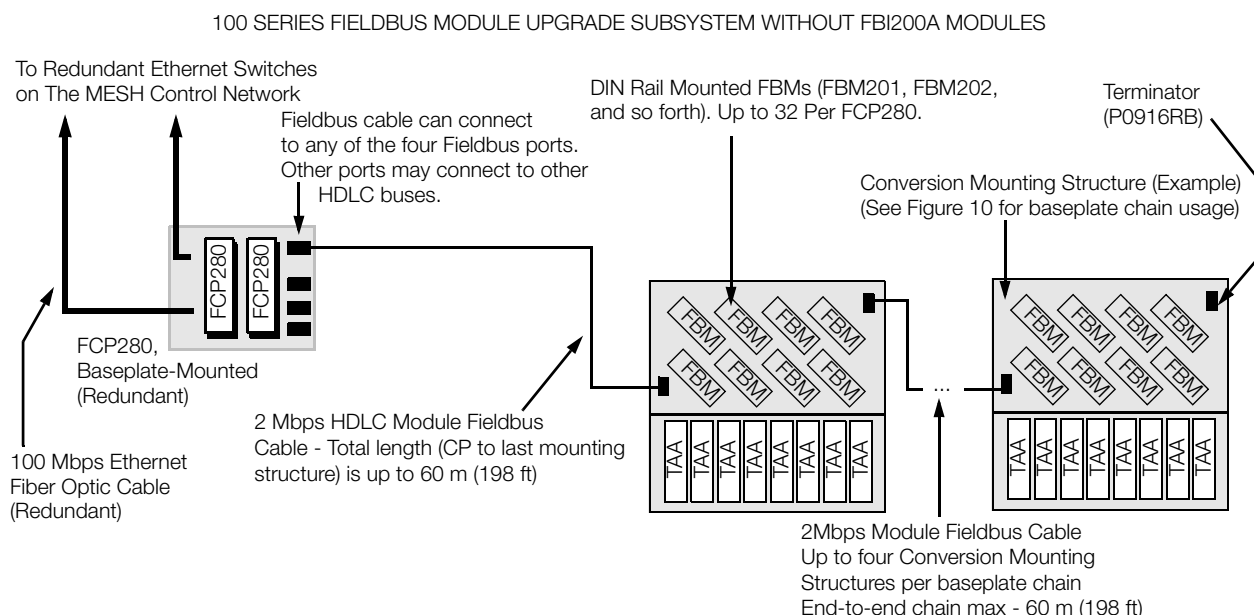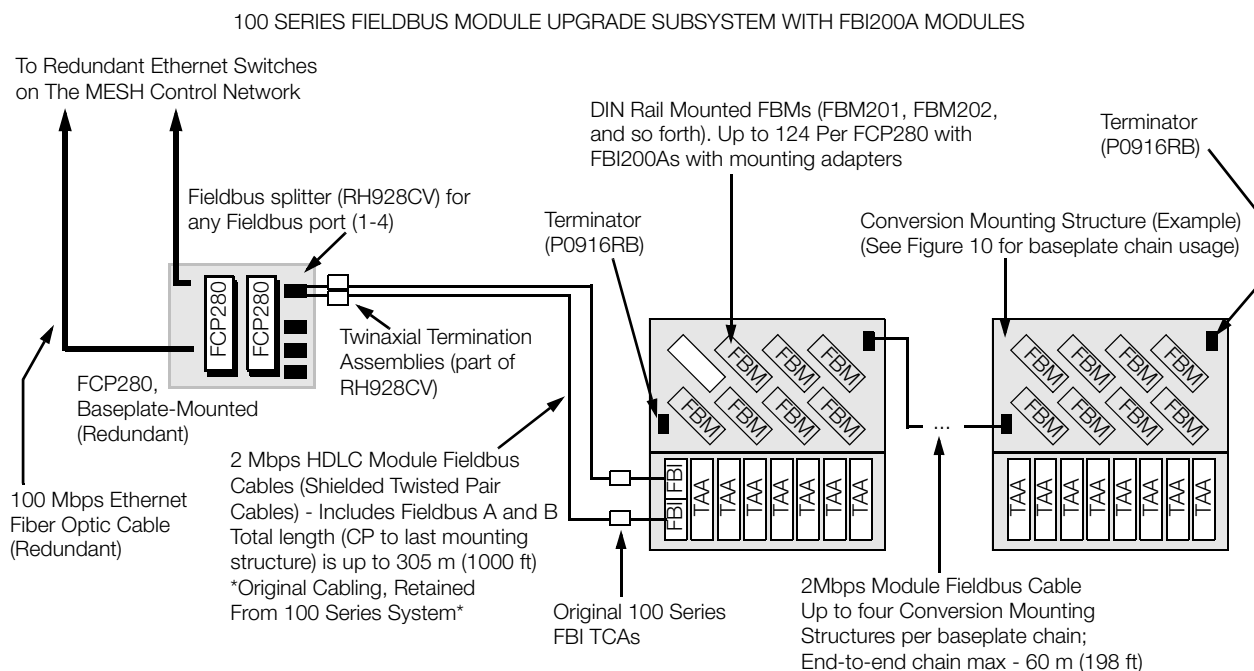

NOTE: Conversion mounting structures may be installed in existing enclosures in the field to replace existing 100 Series mounting structures. New FCP280 pair must be installed in separate location to replace existing control processors.

Figure 3. 100 Series Upgrade Subsystem, Typical FCP280 Configurations, Upgrade Path (Conceptual), Part 1


100 SERIES FIELDBUS MODULE UPGRADE SUBSYSTEM WITH FBI200 and FBI200A MODULES

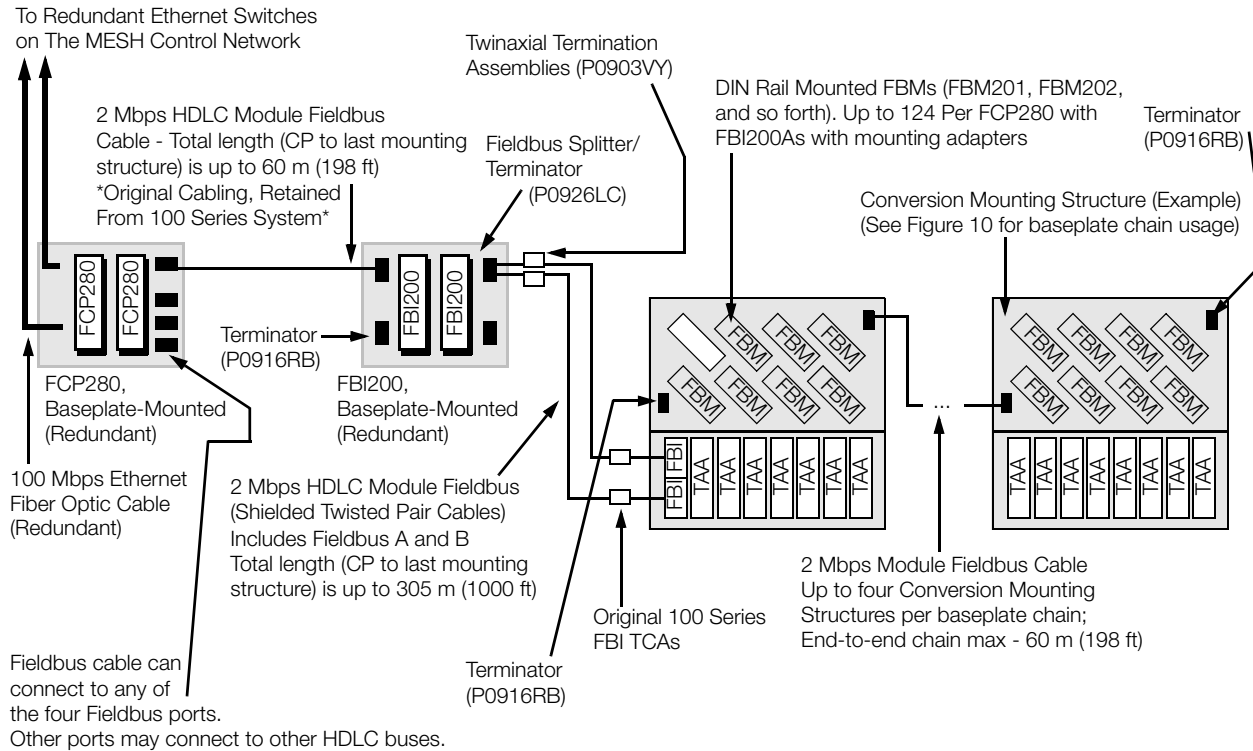

NOTE: Conversion mounting structures may be installed in existing enclosures in the field to replace existing 100 Series mounting structures. New FCP280 pair must be installed in separate location to replace existing control processors.

Figure 4. 100 Series Upgrade Subsystem, Typical FCP280 Configurations, Upgrade Path (Conceptual), Part 2




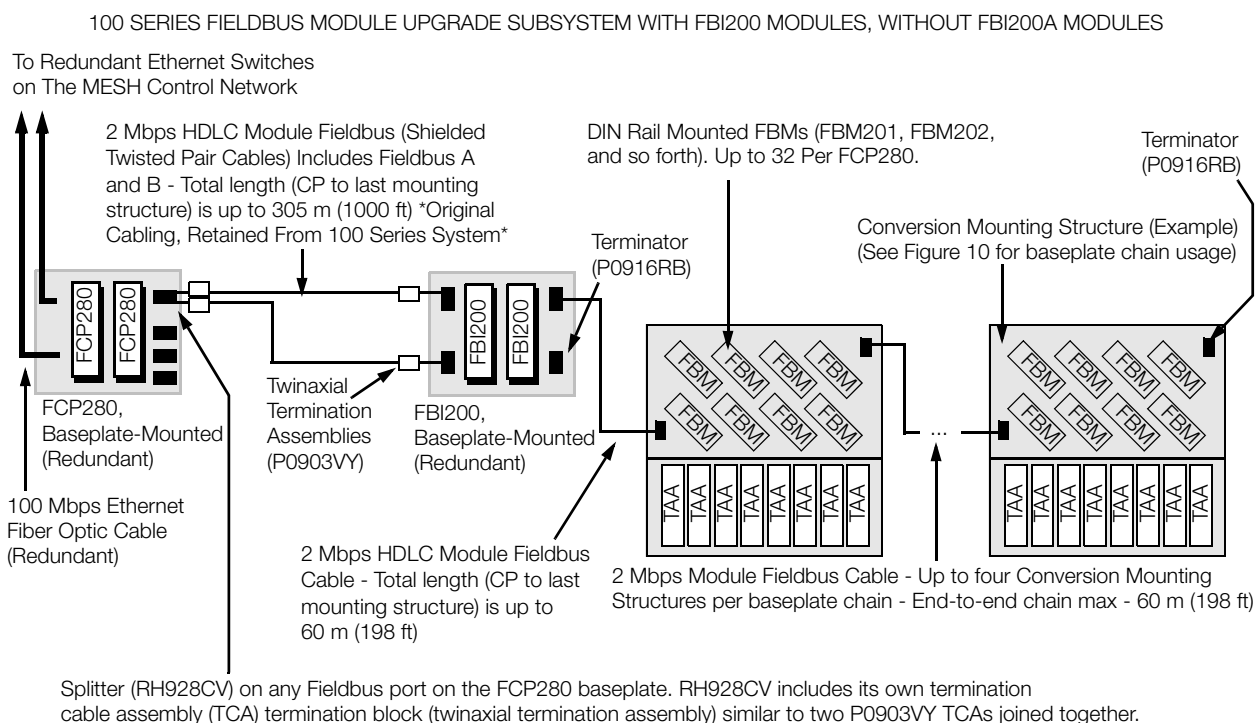


NOTE: Conversion mounting structures may be installed in existing enclosures in the field to replace existing 100 Series mounting structures. New FCP280 pair must be installed in separate location to replace existing control processors.

**Figure 5. 100 Series Upgrade Subsystem, Typical FCP280 Configurations, Upgrade Path (Conceptual), Part 3**

### 100 SERIES FIELDBUS MODULE UPGRADE SUBSYSTEM WITH FBI200A MODULES

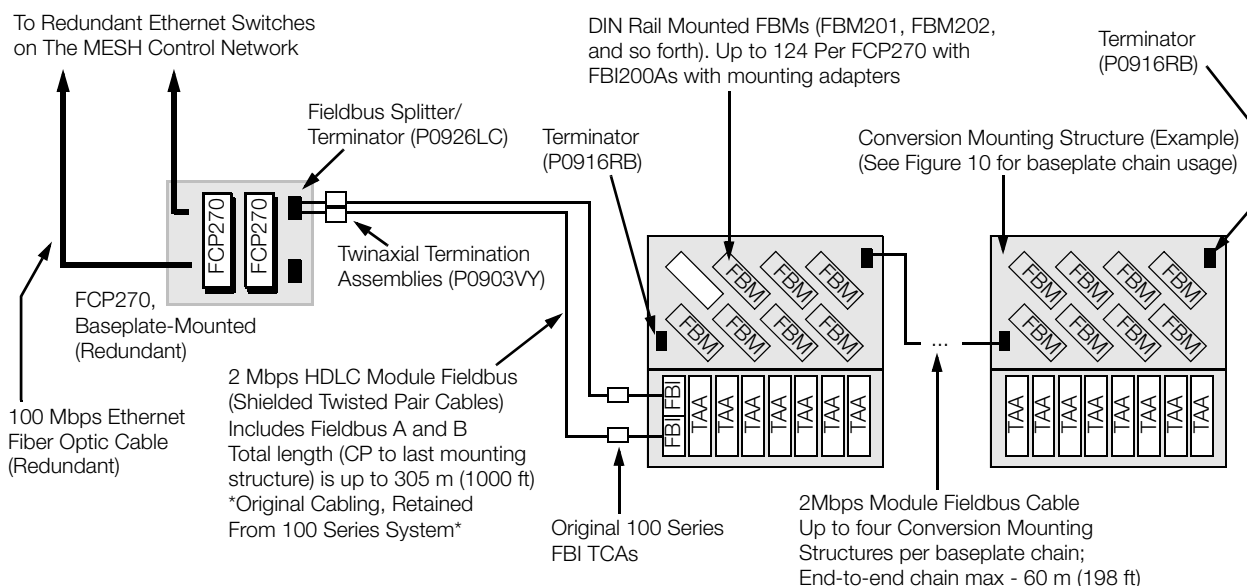


### 100 SERIES FIELDBUS MODULE UPGRADE SUBSYSTEM WITHOUT FBI200A MODULES

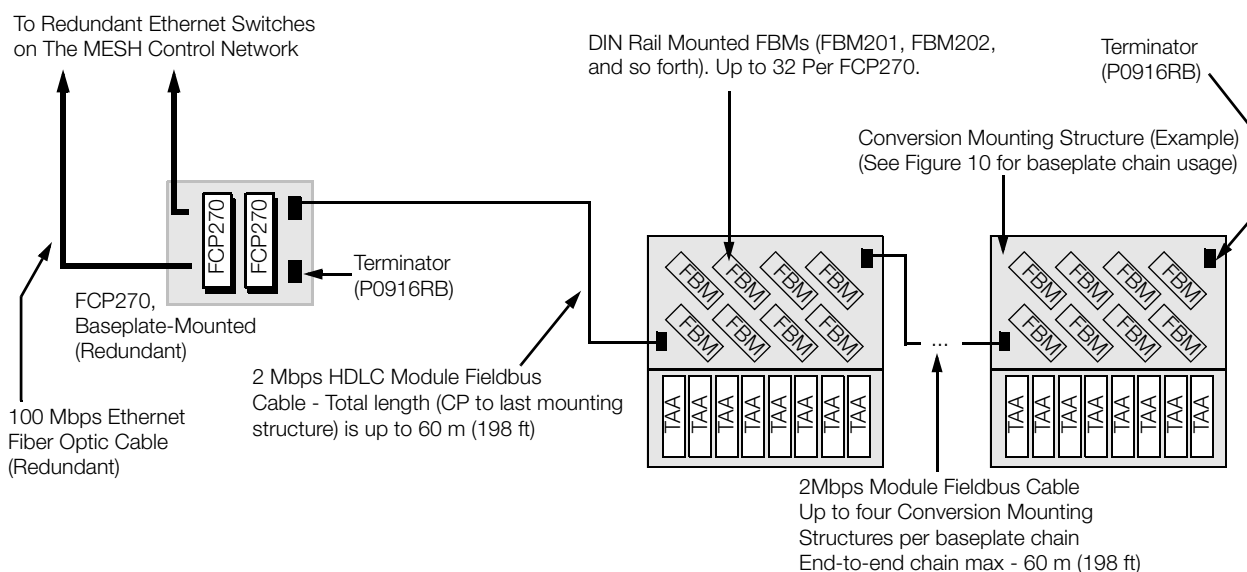


NOTE: Conversion mounting structures may be installed in existing enclosures in the field to replace existing 100 Series mounting structures. New FCP270 or ZCP270/FCM100E pair must be installed in separate location to replace existing control processors.

*Figure 6. 100 Series Upgrade Subsystem, Typical FCP270 Configurations, Upgrade Path (Conceptual), Part 1*

# 100 SERIES FIELDBUS MODULE UPGRADE SUBSYSTEM WITH FBI200 and FBI200A MODULES

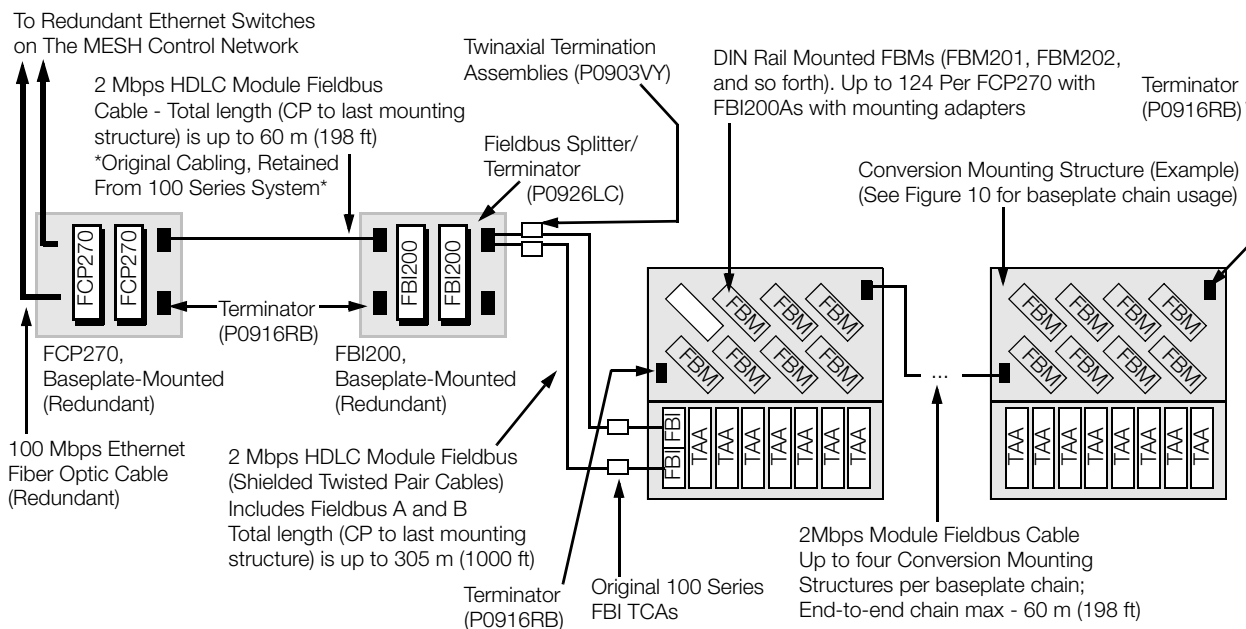

# 100 SERIES FIELDBUS MODULE UPGRADE SUBSYSTEM WITH FBI200 MODULES, WITHOUT FBI200A MODULES

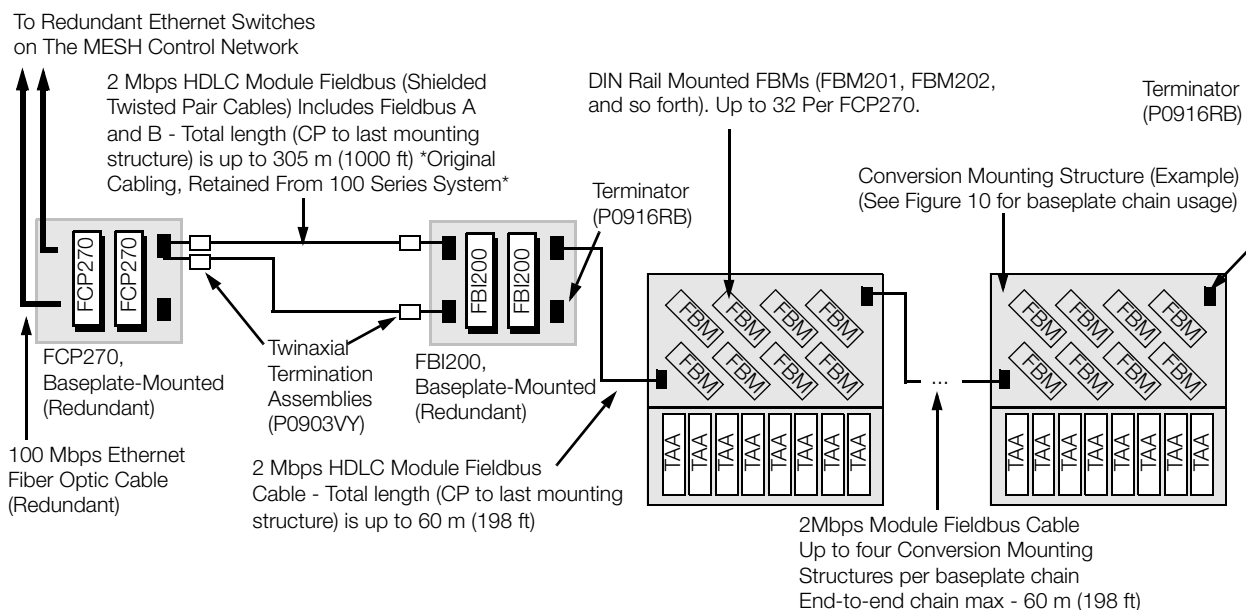

NOTE: Conversion mounting structures may be installed in existing enclosures in the field to replace existing 100 Series mounting structures. New FCP270 or ZCP270/FCM100E pair must be installed in separate location to replace existing control processors.

Figure 7. 100 Series Upgrade Subsystem, Typical FCP270 Configurations, Upgrade Path (Conceptual), Part 2



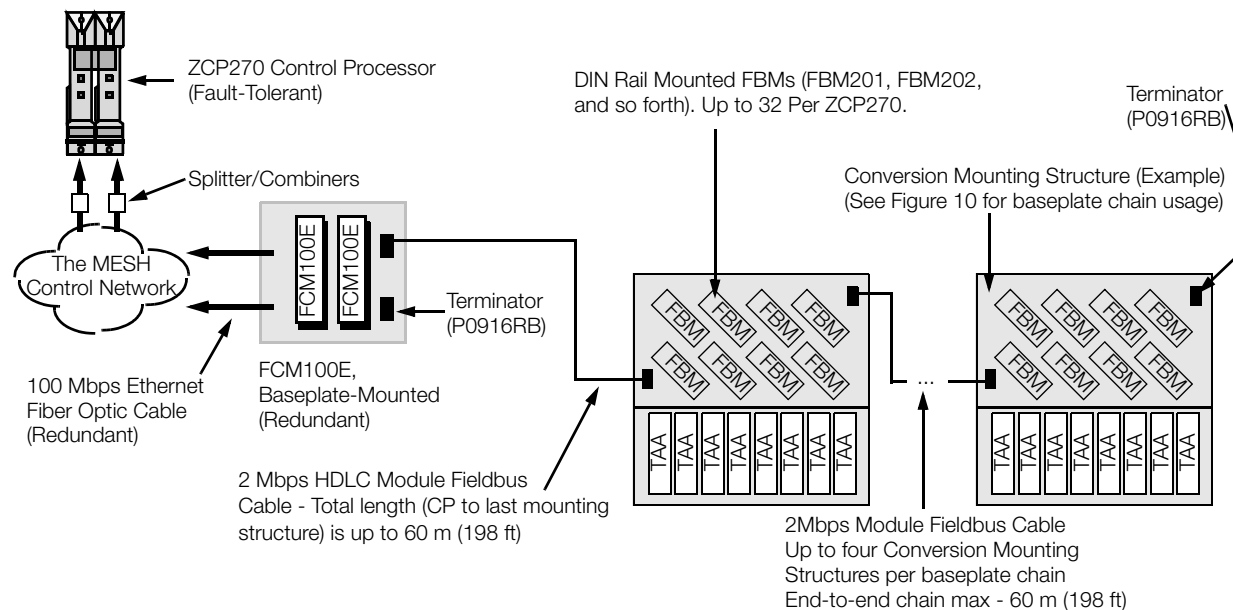


Figure 8. 100 Series Upgrade Subsystem, Typical ZCP270/FCM100E Configurations, Upgrade Path (Conceptual), Part 1

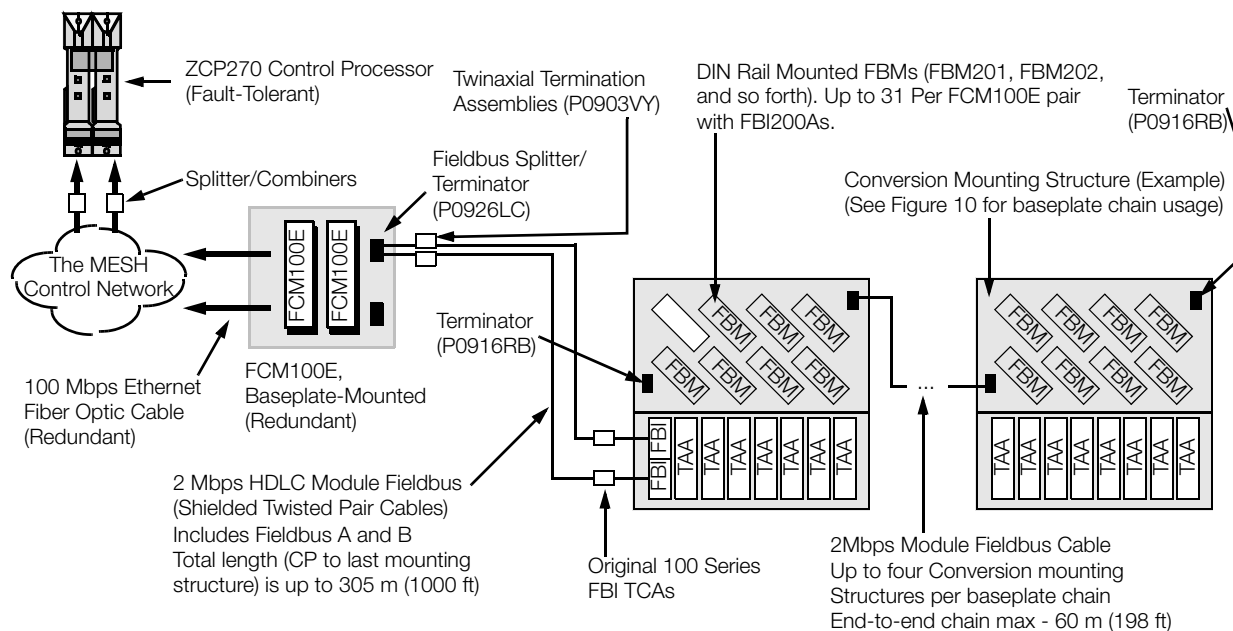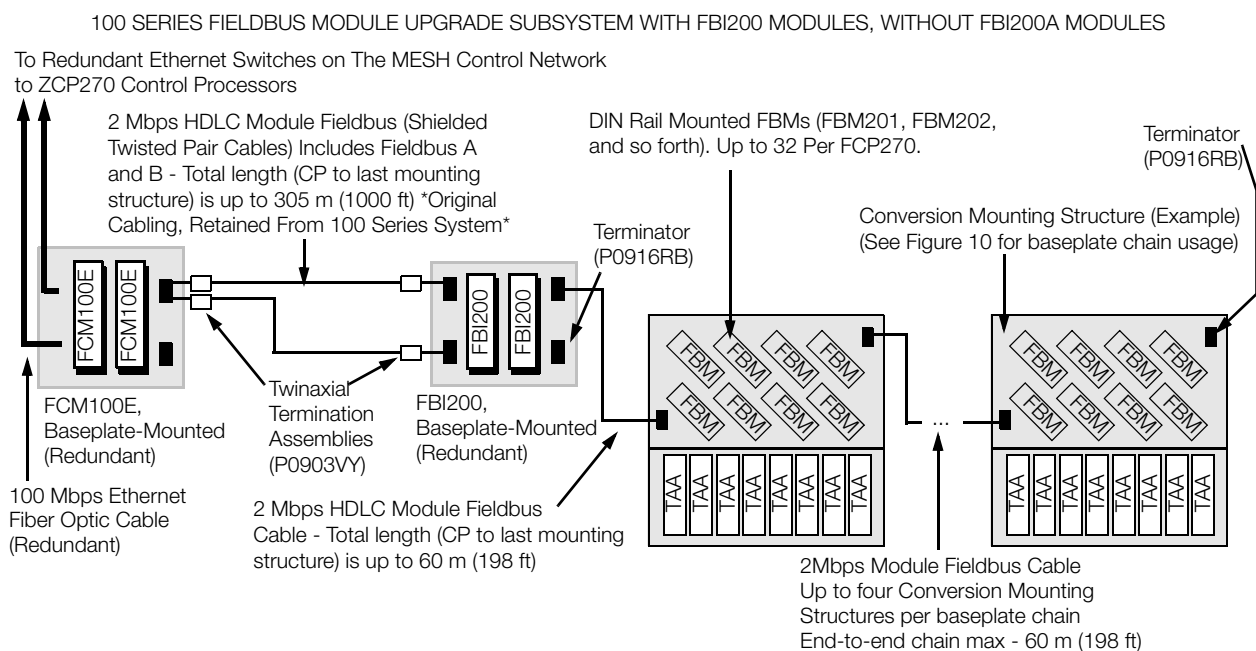


NOTE: Conversion mounting structures may be installed in existing enclosures in the field to replace existing 100 Series mounting structures. New FCP270 or ZCP270/FCM100E pair must be installed in separate location to replace existing control processors.

Figure 9. 100 Series Upgrade Subsystem, Typical ZCP270/FCM100E Configurations, Upgrade Path (Conceptual), Part 2

## CONVERSION MOUNTING STRUCTURE IMPLEMENTATION IN UPGRADE PATH

Conversion mounting structures, which provide for convenient physical grouping of the modules are interconnected by cables. Figure 10 shows basic mounting structure configuration using shielded twisted-pair connections. Optional redundant cables for the Module Fieldbus can be used by connecting the cables to A/B Module Fieldbus splitter/terminators.

Figure 10 shows a basic mounting structure configuration using shielded twisted-pair connections. This configuration is used when the mounting structures are mounted within an enclosure or enclosures in the same location (for example, in multiple enclosures in the same area). Shielded twisted-pair cables (for interconnecting the Modular Baseplates) are available in lengths of 0.25 to 60 meters.

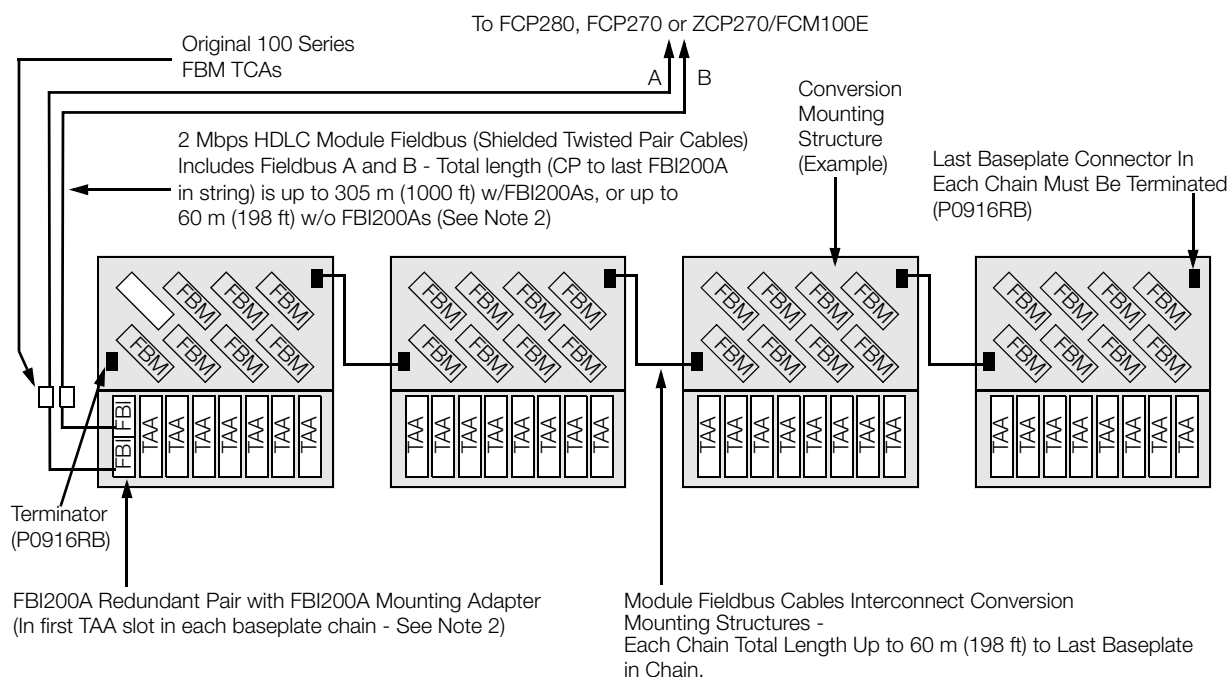

### NOTES:

1. Maximum Fieldbus Module quantity is listed in conversion mounting structure functional specifications.
2. If FBI200As are not installed, a baseplate chain can have a 200 Series FBM/TAA pair installed in FBM/TAA Slot 1 of the first conversion mounting structure, increasing the total number of 200 Series FBMs per baseplate chain from 31 to 32. Without FBI200As, the conversion mounting structure connects to the FCP280, FCP270 or ZCP270/FCM100E via standard 2 Mbps HDLC Module Fieldbus cables.

**Figure 10. Conversion Mounting Structure Implementation Example (Upgrade Path)**

Modular Baseplates can be implemented in a baseplate chain as discussed in *DIN Rail Mounted Subsystem Overview* (PSS 21H-2W1 B3).



## FIELDBUS MODULES

Each 200 Series Fieldbus Module is configurable for operation with the applicable field sensors and/or actuators.

Separate tables for replacement hardware are provided below, depending on whether you are replacing:

- ▶ A standalone 100 Series FBM - requires one 200 Series FBM and:
  - For the *upgrade* path, one Termination Assembly Adapter (TAA) module, -OR -
- For the *replacement* path, one 200 Series termination assembly (TA) and one 200 Series TA cable
- ▶ A 100 Series Main/Expander FBM pair (one Main FBM and one Expansion FBM), as illustrated in Figure 11 - requires one 200 Series FBM, and either:
  - For the upgrade path, one Main TAA and one Expansion TAA, -OR -
  - For the replacement path, one 200 Series Main TA and one Expansion TA connected with an expander cable

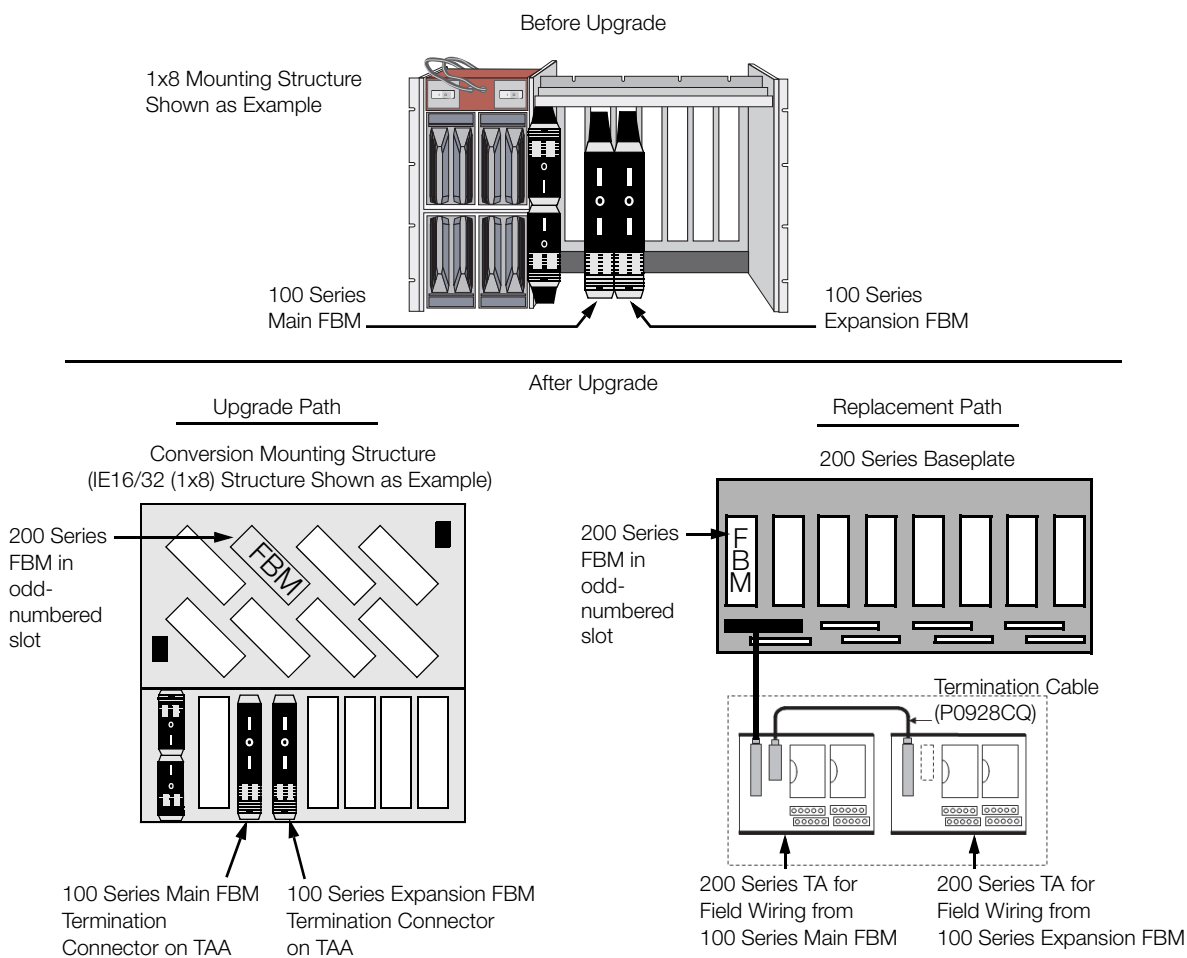


Figure 11. Upgrade for 100 Series Main/Expansion Pair

In both the upgrade and replacement paths, the main/expansion FBM/TAA/TA pair must mount in an odd/even pair of adjacent FBM/TAA slots, as shown in Figure 11. A TAA's associated FBM must be placed in the FBM position which correlates with the slot which holds the main TAA.

### Replacement Hardware for Standalone 100 Series FBMs and TCAs

Table 1 lists the 200 Series FBMs and Termination Assembly Adapter (TAA) modules (for the *upgrade* path) and Termination Assemblies (TAs) (for the *replacement* path) which replace the standalone

100 Series FBMs (which do not use expansion FBMs). It also lists the Product Specification Sheets which provide additional information about each 200 Series FBM.

For the *replacement* path, 200 Series FBMs must use Termination Assemblies (TAs) instead of TAAs.

#### NOTE

For the list of termination assemblies (TAs) used with each 200 Series FBM to support the appropriate signals, refer to the appropriate 200 Series FBM PSS in Table 1.

**Table 1. Upgrade 200 Series Fieldbus Modules for Standalone 100 Series FBMs**

| 100 Series FBM                        | Upgrade with 200 Series FBM | Function(s)                                                                      | Upgrade TAA      | Replacement TA                     | PSS Number      |
|---------------------------------------|-----------------------------|----------------------------------------------------------------------------------|------------------|------------------------------------|-----------------|
| FBM01 (field I/O to non-HART devices) | FBM201                      | 8-Channel 0 to 20 mA Input, Channel Isolated                                     | TAA01 (P0923RA)  | P0916AA, P0916AB, P0916XG, P0917JK | PSS 21H-2Z1 B4  |
| FBM01 (field I/O to HART devices)     | FBM214b                     | 8-Channel 0 to 20 mA, HART® Input                                                | TAA01 (P0923RA)  | P0924JH                            | PSS 21H-2Z14 B5 |
| FBM02 and FBM36                       | FBM202                      | 8-Channel Thermocouple/Millivolt Input, Channel Isolated                         | TAA02 (P0923RB)  | P0916AC, P0916AD, P0916XH, P0917JL | PSS 21H-2Z2 B4  |
| FBM03A                                | FBM203                      | 8-Channel RTD Input (platinum or nickel), Channel Isolated, 0 to 320 ohm, 3-wire | TAA03A (P0923RC) | P0916AE, P0916AF, P0916XJ, P0917JM | PSS 21H-2Z3 B4  |
| FBM03B                                | FBM203d <sup>(a)</sup>      | 8-Channel RTD Input (platinum), Channel Isolated, 0 to 320 ohm, 2-4 wire         | TAA03B (P0924GX) | P0924EX                            | PSS 21H-2Z3 B4  |

**Table 1. Upgrade 200 Series Fieldbus Modules for Standalone 100 Series FBMs (Continued)**

| 100 Series FBM              | Upgrade with 200 Series FBM    | Function(s)                                                                                                                          | Upgrade TAA      | Replacement TA                                                            | PSS Number      |
|-----------------------------|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|------------------|---------------------------------------------------------------------------|-----------------|
| FBM04 (to non-HART devices) | FBM204                         | 8-Channel 0 to 20 mA I/O (4 Input, 4 Output), Channel Isolated                                                                       | TAA04 (P0923RD)  | P0916AG, P0916AH, P0916XK, P0917QW (with output bypass jacks)             | PSS 21H-2Z4 B4  |
| FBM04 (to HART devices)     | FBM244                         | 4-Channel 0 to 20 mA Input and 4-Channel 0 to 20 mA Output (with HART® Support on All Channels)                                      | TAA04 (P0923RD)  | P0924QU, or P0924QZ (with output bypass jacks)                            | PSS 21H-2Z44 B4 |
| FBM05 (to non-HART devices) | FBM208b (Upgrade Path Only)    | Redundant with Readback, 0 to 20 mA Input/Output (4 Input and 4 Output), Channel Isolated                                            | TAA05 (P0923RE)  | n/a                                                                       | PSS 21H-2Z8 B4  |
| FBM05 (to non-HART devices) | FBM208 (Replacement Path Only) | Redundant with Readback, 0 to 20 mA Input/Output (4 Input and 4 Output), Channel Isolated                                            | n/a              | P0916AJ, P0916AK, P0916XL, P0917JP                                        | PSS 21H-2Z8 B4  |
| FBM05 (to HART devices)     | FBM245 <sup>(b)</sup>          | Redundant 4-Channel 0 to 20 mA Input and 4-Channel 0 to 20 mA Output (with HART® Support on All Channels)                            | n/a              | P0924QU, or P0924QZ (with output bypass jacks)                            | PSS 21H-2Z45 B4 |
| FBM06                       | FBM206b                        | 4-Channel Pulse Input, 4-Channel 0 to 20 mA Output, Channel Isolated                                                                 | TAA06 (P0923RF)  | P0924QN, or P0924QP (with output bypass jacks)                            | PSS 21H-2Z6 B4  |
| FBM17                       | FBM227                         | 4-Channel 0 to 10 V dc Input, 4-Channel Discrete Input<br>2-Channel 0 to 10 V dc Output, 4-Channel Discrete Output, Channel Isolated | TAA17 (P0923RS)  | P0924DB (with compression terminals)<br>P0924DE (with ring-lug terminals) | PSS 21H-2Z27 B4 |
| FBM18                       | FBM243                         | 8-Channel Bi-directional FoxCom™ Dual Baud Rate Intelligent Device Interface Communication                                           | TAA18 (P0924QA)  | P0916BA, P0931KJ, P0917XW                                                 | PSS 21H-2Z43 B4 |
| FBM33A                      | FBM203c                        | 8-Channel RTD Input (copper), Channel Isolated, 0 to 30 ohm, 3-wire                                                                  | TAA03A (P0923RC) | P0916AE, P0916AF, P0916XJ, P0917JM                                        | PSS 21H-2Z3 B4  |
| FBM33B                      | FBM203d <sup>(a)</sup>         | 8-Channel RTD Input (copper), Channel Isolated, 0 to 30 ohm, 2-4 wire                                                                | TAA03B (P0924GX) | P0924EX                                                                   | PSS 21H-2Z3 B4  |

Table 1. Upgrade 200 Series Fieldbus Modules for Standalone 100 Series FBMs (Continued)

| 100 Series FBM                             | Upgrade with 200 Series FBM | Function(s)                                                                                                                             | Upgrade TAA     | Replacement TA                                                | PSS Number      |
|--------------------------------------------|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------------------------------------------------------------|-----------------|
| FBM37 (to non-HART devices) <sup>(c)</sup> | FBM237                      | 8-Channel 0 to 20 mA Output, Channel Isolated                                                                                           | TAA37 (P0924EP) | P0916CC, P0916QC, P0916YE, P0917QZ (with output bypass jacks) | PSS 21H-2Z37 B4 |
| FBM37 (to HART devices)                    | FBM215 <sup>(d)</sup>       | 8-Channel 0 to 20 mA, HART Output                                                                                                       | TAA37 (P0924EP) | P0917XV, P0926EK, P0926SP                                     | PSS 21H-2Z15 B4 |
| FBM39                                      | FBM243b                     | 4-Channel Bi-directional FoxCom™ Dual Baud Rate Intelligent Device Interface Communication, Plus 4-Channel 0 to 20 mA, Output           | TAA39 (P0923SE) | P0924QQ, or P0924QY (with output bypass jacks)                | PSS 21H-2Z43 B4 |
| FBM43                                      | FBM243                      | 8-Channel Bi-directional FoxCom™ Dual Baud Rate Intelligent Device Interface Communication                                              | TAA01 (P0923RA) | P0916BA, P0931KJ, P0917XW                                     | PSS 21H-2Z43 B4 |
| FBM44                                      | FBM243b                     | 4-Channel Bi-directional FoxCom™ Dual Baud Rate Intelligent Device Interface Communication, Plus 4-Channel 0 to 20 mA, Output           | TAA44 (P0923SG) | P0924QQ, or P0924QY (with output bypass jacks)                | PSS 21H-2Z43 B4 |
| FBM46                                      | FBM246b                     | Redundant, 4-Channel Bi-directional FoxCom Dual Baud Rate Intelligent Device Interface Communication, Plus 4-Channel 0 to 20 mA, Output | TAA46 (P0924SN) | P0924QQ, or P0924QY (with output bypass jacks)                | PSS 21H-2Z46 B4 |

(a) The accuracy of FBM203d is  $\pm 0.32\%$  of span for 0 to 30 ohm input. The measurement accuracy of this configuration is less than the original  $\pm 0.125\%$  of span for the FBM33B. FBM203d is the only 4-wire RTD FBM available in the 200 Series set of FBMs.

(b) FBM245 may only replace FBM05 in the replacement path. This is not supported for the upgrade path. FBM245 may also be used to replace FBM05 when the FBM05 is used with non-HART devices.

(c) In the replacement path, FBM37 can also be converted to a redundant solution, with a redundant FBM237 pair.

(d) FBM215 may also be used with FBM37 when used with non-HART devices.

## Upgrade Hardware for 100 Series Main/Expansion FBM and TCA Pairs

When upgrading a 100 Series main/expansion FBM pair, you will need to choose:

- ▶ One 200 Series FBM
- ▶ One of the following equipment pairs for the field I/O wiring:
  - For the *upgrade* path, one main TAA and one expansion TAA, or
  - For the *replacement* path, one 200 Series main TA and one expansion TA, connected with an expansion termination cable

Table 2 lists the 200 Series FBMs and applicable TAAs or TAs which are used to upgrade 100 Series main FBMs. This table also lists the expansion FBMs which can be used with these main FBMs.

To determine which 200 Series FBMs and applicable TAAs or TAs upgrade the expansion FBMs used with the main FBMs, refer to Table 3.

These tables also list the Product Specification Sheets which provide additional information about each 200 Series FBM, and its associated TAs.

**Table 2. Upgrade 200 Series FBMs for 100 Series Main FBMs**

| 100 Series Main FBM               | & 100 Series Expansion FBM <sup>(a)</sup>    | Upgrade with 200 Series FBM <sup>(b)</sup> | Function(s)                                                                                                               | Upgrade TAA     | Replacement TA | PSS Number      |
|-----------------------------------|----------------------------------------------|--------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|-----------------|----------------|-----------------|
| FBM07A and FBM07B                 | None, or FBM12, FBM13, FBM21 or FBM25        | FBM217                                     | 32-Channel Discrete Input, Group Isolated                                                                                 | TAA07 (P0923RG) | P0924HA        | PSS 21H-2Z17 B4 |
| FBM07A and FBM07B                 | FBM14, FBM15, FBM16, FBM27 or FBM42          | FBM219                                     | 24-Channel Voltage Monitor, Plus 8-Channel Discrete Output, External Source, Group Isolated                               | TAA07 (P0923RG) | P0924HA        | PSS 21H-2Z19 B4 |
| FBM08                             | None, or FBM12, FBM13, FBM21 or FBM25        | FBM217                                     | 32-Channel Discrete Input, Group Isolated                                                                                 | TAA08 (P0923RH) | P0924HC        | PSS 21H-2Z17 B4 |
| FBM08                             | FBM14, FBM15, FBM16, FBM27 or FBM42          | FBM219                                     | 24-Channel Voltage Monitor, Plus 8-Channel Discrete Output, External Source, Group Isolated                               | TAA08 (P0923RH) | P0924HC        | PSS 21H-2Z19 B4 |
| FBM09A, FBM09B, FBM09C and FBM09D | FBM12, FBM13, FBM21 or FBM25                 | FBM238                                     | 24-Channel Voltage Monitor or Contact Sense, Plus 8-Channel Discrete Output, External or Internal Source, Group Isolated  | TAA09 (P0923RJ) | P0924HE        | PSS 21H-2Z38 B4 |
| FBM09A, FBM09B, FBM09C and FBM09D | None, or FBM14, FBM15, FBM16, FBM27 or FBM42 | FBM239                                     | 16-Channel Voltage Monitor or Contact Sense, Plus 16-Channel Discrete Output, External or Internal Source, Group Isolated | TAA09 (P0923RJ) | P0924HE        | PSS 21H-2Z39 B4 |

Table 2. Upgrade 200 Series FBMs for 100 Series Main FBMs (Continued)

| 100 Series Main FBM | & 100 Series Expansion FBM <sup>(a)</sup>    | Upgrade with 200 Series FBM <sup>(b)</sup> | Function(s)                                                                                                               | Upgrade TAA     | Replacement TA | PSS Number      |
|---------------------|----------------------------------------------|--------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|-----------------|----------------|-----------------|
| FBM10               | FBM12, FBM13, FBM21 or FBM25                 | FBM238                                     | 24-Channel Voltage Monitor or Contact Sense, Plus 8-Channel Discrete Output, External or Internal Source, Group Isolated  | TAA10 (P0923RK) | P0924HG        | PSS 21H-2Z38 B4 |
| FBM10               | None, or FBM14, FBM15, FBM16, FBM27 or FBM42 | FBM239                                     | 16-Channel Voltage Monitor or Contact Sense, Plus 16-Channel Discrete Output, External or Internal Source, Group Isolated | TAA10 (P0923RK) | P0924HG        | PSS 21H-2Z39 B4 |
| FBM11               | FBM12, FBM13, FBM21 or FBM25                 | FBM238                                     | 24-Channel Voltage Monitor or Contact Sense, Plus 8-Channel Discrete Output, External or Internal Source, Group Isolated  | TAA11 (P0923RL) | P0924HJ        | PSS 21H-2Z38 B4 |
| FBM11               | None, or FBM14, FBM15, FBM16, FBM27 or FBM42 | FBM239                                     | 16-Channel Voltage Monitor or Contact Sense, Plus 16-Channel Discrete Output, External or Internal Source, Group Isolated | TAA11 (P0923RL) | P0924HJ        | PSS 21H-2Z39 B4 |
| FBM20               | None, or FBM12, FBM13, FBM21 or FBM25        | FBM217                                     | 32-Channel Discrete Input, Group Isolated                                                                                 | TAA20 (P0923RU) | P0924HL        | PSS 21H-2Z17 B4 |
| FBM20               | FBM14, FBM15, FBM16, FBM27 or FBM42          | FBM219                                     | 24-Channel Voltage Monitor, Plus 8-Channel Discrete Output, External Source, Group Isolated                               | TAA20 (P0923RU) | P0924HL        | PSS 21H-2Z19 B4 |
| FBM24A              | None, or FBM12, FBM13, FBM21 or FBM25        | FBM217                                     | 32-Channel Discrete Input, Group Isolated                                                                                 | TAA24 (P0923RW) | P0924HN        | PSS 21H-2Z17 B4 |
| FBM24B              | None, or FBM12, FBM13, FBM21 or FBM25        | FBM217                                     | 32-Channel Discrete Input, Group Isolated                                                                                 | TAA24 (P0923RW) | P0924HP        | PSS 21H-2Z17 B4 |
| FBM24C              | None, or FBM12, FBM13, FBM21 or FBM25        | FBM217                                     | 32-Channel Discrete Input, Group Isolated                                                                                 | TAA24 (P0923RW) | P0924HQ        | PSS 21H-2Z17 B4 |
| FBM24A              | FBM14, FBM15, FBM16, FBM27 or FBM42          | FBM219                                     | 24-Channel Voltage Monitor, Plus 8-Channel Discrete Output, External Source, Group Isolated                               | TAA24 (P0923RW) | P0924HN        | PSS 21H-2Z19 B4 |

**Table 2. Upgrade 200 Series FBMs for 100 Series Main FBMs (Continued)**

| <b>100 Series Main FBM</b> | <b>&amp; 100 Series Expansion FBM<sup>(a)</sup></b> | <b>Upgrade with 200 Series FBM<sup>(b)</sup></b> | <b>Function(s)</b>                                                                                                        | <b>Upgrade TAA</b> | <b>Replacement TA</b> | <b>PSS Number</b> |
|----------------------------|-----------------------------------------------------|--------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|--------------------|-----------------------|-------------------|
| FBM24B                     | FBM14, FBM15, FBM16, FBM27 or FBM42                 | FBM219                                           | 24-Channel Voltage Monitor, Plus 8-Channel Discrete Output, External Source, Group Isolated                               | TAA24 (P0923RW)    | P0924HP               | PSS 21H-2Z19 B4   |
| FBM24C                     | FBM14, FBM15, FBM16, FBM27 or FBM42                 | FBM219                                           | 24-Channel Voltage Monitor, Plus 8-Channel Discrete Output, External Source, Group Isolated                               | TAA24 (P0923RW)    | P0924HQ               | PSS 21H-2Z19 B4   |
| FBM26A                     | FBM12, FBM13, FBM21 or FBM25                        | FBM238                                           | 24-Channel Voltage Monitor or Contact Sense, Plus 8-Channel Discrete Output, External or Internal Source, Group Isolated  | TAA26 (P0923RY)    | P0924HU               | PSS 21H-2Z38 B4   |
| FBM26A                     | None, or FBM14, FBM15, FBM16, FBM27 or FBM42        | FBM239                                           | 16-Channel Voltage Monitor or Contact Sense, Plus 16-Channel Discrete Output, External or Internal Source, Group Isolated | TAA26 (P0923RY)    | P0924HU               | PSS 21H-2Z39 B4   |
| FBM26B                     | FBM12, FBM13, FBM21 or FBM25                        | FBM238                                           | 24-Channel Voltage Monitor or Contact Sense, Plus 8-Channel Discrete Output, External or Internal Source, Group Isolated  | TAA26 (P0923RY)    | P0924HV               | PSS 21H-2Z38 B4   |
| FBM26B                     | None, or FBM14, FBM15, FBM16, FBM27 or FBM42        | FBM239                                           | 16-Channel Voltage Monitor or Contact Sense, Plus 16-Channel Discrete Output, External or Internal Source, Group Isolated | TAA26 (P0923RY)    | P0924HV               | PSS 21H-2Z39 B4   |
| FBM26C                     | FBM12, FBM13, FBM21 or FBM25                        | FBM238                                           | 24-Channel Voltage Monitor or Contact Sense, Plus 8-Channel Discrete Output, External or Internal Source, Group Isolated  | TAA26 (P0923RY)    | P0924HW               | PSS 21H-2Z38 B4   |
| FBM26C                     | None, or FBM14, FBM15, FBM16, FBM27 or FBM42        | FBM239                                           | 16-Channel Voltage Monitor or Contact Sense, Plus 16-Channel Discrete Output, External or Internal Source, Group Isolated | TAA26 (P0923RY)    | P0924HW               | PSS 21H-2Z39 B4   |



Table 2. Upgrade 200 Series FBMs for 100 Series Main FBMs (Continued)

| 100 Series Main FBM | & 100 Series Expansion FBM <sup>(a)</sup>    | Upgrade with 200 Series FBM <sup>(b)</sup> | Function(s)                                                                                                               | Upgrade TAA     | Replacement TA | PSS Number      |
|---------------------|----------------------------------------------|--------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|-----------------|----------------|-----------------|
| FBM41A and FBM41C   | FBM12, FBM13, FBM21 or FBM25                 | FBM238                                     | 24-Channel Voltage Monitor or Contact Sense, Plus 8-Channel Discrete Output, External or Internal Source, Group Isolated  | TAA41 (P0923SC) | P0924JA        | PSS 21H-2Z38 B4 |
| FBM41A and FBM41C   | None, or FBM14, FBM15, FBM16, FBM27 or FBM42 | FBM239                                     | 16-Channel Voltage Monitor or Contact Sense, Plus 16-Channel Discrete Output, External or Internal Source, Group Isolated | TAA41 (P0923SC) | P0924JA        | PSS 21H-2Z39 B4 |

(a) The TAA module which upgrades the Expansion FBM is listed in Table 3.

(b) Each Main FBM can optionally be used with one Expansion FBM as indicated in the above table. The types of Expansion FBMs associated with each Main FBM are listed with the Main FBM.

Expansion FBMs do not require an additional 200 Series FBM. Expansion FBMs are always used with a Main FBM.

Each 100 Series Main FBM can be combined with any of the nine Expansion FBMs listed in the second column of this table.

Table 3 lists the equipment which is used to upgrade 100 Series expansion FBMs associated with the main FBMs listed in Table 2.

Table 3. Upgrade 200 Series FBMs for Expansion FBMs

| 100 Series Expansion FBM          | Upgrade with 200 Series FBM <sup>(a)</sup> | Upgrade TAA     | Replacement TA | PSS Number                         |
|-----------------------------------|--------------------------------------------|-----------------|----------------|------------------------------------|
| FBM12A and FBM12B                 | FBM217 or FBM238                           | TAA12 (P0923RM) | P0924HB        | PSS 21H-2Z17 B4<br>PSS 21H-2Z38 B4 |
| FBM13                             | FBM217 or FBM238                           | TAA13 (P0923RN) | P0924HD        | PSS 21H-2Z17 B4<br>PSS 21H-2Z38 B4 |
| FBM14A, FBM14B, FBM14C and FBM14D | FBM219, or FBM239                          | TAA14 (P0923RP) | P0924HF        | PSS 21H-2Z19 B4<br>PSS 21H-2Z39 B4 |
| FBM15                             | FBM219, or FBM239                          | TAA15 (P0923RQ) | P0924HH        | PSS 21H-2Z19 B4<br>PSS 21H-2Z39 B4 |
| FBM16                             | FBM219, or FBM239                          | TAA16 (P0923RR) | P0924HK        | PSS 21H-2Z19 B4<br>PSS 21H-2Z39 B4 |
| FBM21                             | FBM217, or FBM238                          | TAA21 (P0923RV) | P0924HM        | PSS 21H-2Z17 B4<br>PSS 21H-2Z38 B4 |
| FBM25A                            | FBM217 or FBM238                           | TAA25 (P0923RX) | P0924HR        | PSS 21H-2Z17 B4<br>PSS 21H-2Z38 B4 |

**Table 3. Upgrade 200 Series FBMs for Expansion FBMs (Continued)**

| <b>100 Series Expansion FBM</b> | <b>Upgrade with 200 Series FBM<sup>(a)</sup></b> | <b>Upgrade TAA</b> | <b>Replacement TA</b> | <b>PSS Number</b>                  |
|---------------------------------|--------------------------------------------------|--------------------|-----------------------|------------------------------------|
| FBM25B                          | FBM217 or FBM238                                 | TAA25 (P0923RX)    | P0924HS               | PSS 21H-2Z17 B4<br>PSS 21H-2Z38 B4 |
| FBM25C                          | FBM217 or FBM238                                 | TAA25 (P0923RX)    | P0924HT               | PSS 21H-2Z17 B4<br>PSS 21H-2Z38 B4 |
| FBM27A                          | FBM219, or FBM239                                | TAA27 (P0923RZ)    | P0924HX               | PSS 21H-2Z19 B4<br>PSS 21H-2Z39 B4 |
| FBM27B                          | FBM219, or FBM239                                | TAA27 (P0923RZ)    | P0924HY               | PSS 21H-2Z19 B4<br>PSS 21H-2Z39 B4 |
| FBM27C                          | FBM219, or FBM239                                | TAA27 (P0923RZ)    | P0924HZ               | PSS 21H-2Z19 B4<br>PSS 21H-2Z39 B4 |
| FBM42A and FBM42C               | FBM219, or FBM239                                | TAA42 (P0923SD)    | P0924JB               | PSS 21H-2Z19 B4<br>PSS 21H-2Z39 B4 |

(a) The 200 Series FBM type depends on the main FBM attached to this expansion FBM. See Table 2 above.

### TERMINATION ASSEMBLY ADAPTER (TAA) MODULES (FOR UPGRADE PATH)

For the *upgrade* path, field I/O wiring is upgraded to the replacement 200 Series FBMs using the existing Termination Cable Assemblies (TCAs), which can be removed from the 100 Series FBMs and attached to Termination Assembly Adapter (TAA) modules.

The TAA modules have a similar form factor to the 100 Series FBMs. They are installed in the new conversion mounting structures and allow the 200 Series FBMs to interface with existing field I/O wiring via the existing TCAs, formerly used by the 100 Series FBMs.

TAA's are discussed in *Termination Assembly Adapter Modules for 100 Series Upgrade* (PSS 21H-2W4 B4).

### FIELDBUS ISOLATOR/FILTER (FBI200) (FOR UPGRADE OR REPLACEMENT PATH)

The FBI200 (P0927AP) provides HDLC message isolation, filtering and repeating functionality and is able to transmit and receive data from a local HDLC fieldbus and interface with an extended twinaxial bus. The twinaxial cable length can extend to 1830 m (6000 ft) for 268 Kbps data and 305 m (1000 ft) for 2 Mbps data.



Figure 12. Fieldbus Isolator/Filter (FBI200)

Two FBI200s (one for the “A” bus and one for the “B” bus) mount on a vertically mounted 2-position baseplate (P0924RT). This baseplate connects to the conversion mounting structure via a Module Fieldbus cable.

The baseplate has a two-position switch which sets the operational filter mode of the redundant FBI200s. The switch combinations provide for the following communication types:

- ▶ 268 Kbps HDLC communications only
- ▶ 2 Mbps HDLC communications only
- ▶ Mixed 268 Kbps and 2 Mbps HDLC communications

The FBI200 has three yellow LEDs on its front panel which indicate which of these modes is selected. The FBI200 has two additional yellow LEDs which indicate receive (Rx) data activity; one LED is for local fieldbus data and the other is for extended fieldbus data.

The physical layer of the HDLC fieldbus is RS-485 protocol, providing up to 32 unit-loads on the bus. The FBI200's integrated repeater functionality removes any pulse width distortion and regenerates the message, including its full length preamble. This allows the FBI200 to be used as a series repeater to increase the overall HDLC fieldbus length at 2 Mbps of 305 m (1000 ft) sections. The message delay is less than 10 bit times.

### FIELDBUS ISOLATOR/FILTER (FBI200A) (FOR UPGRADE PATH)

The FBI200A (P0923XL), shown in Figure 13, provides extended module Fieldbus communications between the conversion mounting structures and their Control Processors, supporting up to 305 m (1000 ft) of twinaxial cabling. Two FBI200As (one for each bus) must be mounted on an FBI200A mounting adapter (P0923XM) in the left-most slot for 100 Series modules in the first conversion mounting structure in a baseplate chain. The original 100 Series FBI TCAs can be attached to the front of the FBI200As to retain the existing field I/O “A” and “B” bus wiring.

Configurations are possible where both FBI200s and FBI200As are used in the same configuration to extend the Fieldbus. For example, the FBI200A pair can connect to the FBI200 pair on its baseplate, which in turn connects to the FCP280/FCP270s' baseplate via a Module Fieldbus cable.

A redundant pair of FBI200As support up to thirty-one 200 Series FBMs in a baseplate chain. However, they can enable their associated FCP280/FCP270 to support up to one hundred twenty-four 200 Series FBMs from one baseplate port, as described below:

- ▶ FBI200As and their mounting adapters enable up to four baseplate chains to be connected to one Fieldbus port on a FCP270 baseplate, increasing the maximum number of 200 Series FBMs connected to the port from 31 to 124. This is referred to as an Expanded Fieldbus. For the FCP270s, the FBI200A mounting adapters provide the expanded addressing capabilities required to host multiple baseplate chains over the same HDLC Fieldbus. (The FCP280 supports the expanded addressing capabilities intrinsically.)
- ▶ A ZCP270 can connect to up to four baseplate chains, each with one FCM100E pair connected to one FBI200A pair in a baseplate chain with up to thirty-one FBMs or equivalent modules, increasing the maximum number of 200 Series FBMs connected to the CP from 31 to 124.

The FBI200A is discussed in *FBI200A Fieldbus Isolator/Filter* (PSS 21H-2Y17 B4).



Fieldbus Isolator/Filter (FBI200A)



FBI200A Mounting Adapter

Figure 13. Fieldbus Isolator/Filter (FBI200A) and Adapter

## 200 SERIES TERMINATION ASSEMBLIES (TAs) (FOR REPLACEMENT PATH)

For the *replacement* path, field I/O wiring is upgraded to the new 200 Series FBMs by stripping the wiring from its TCAs and attaching it to the 200 Series Termination Assemblies (TAs)

This enables direct connection of field I/O wiring to the 200 Series FBMs without the need for Termination Assembly Adapter (TAA) modules.

## **UPGRADE FOR FBM22 AND THE FBM17/ECB34 COMBINATION**

The FBM22, which supports the A/M station, Coriolis, HTG and gas chromatograph products, does not have a replacement 200 Series FBM.

As well, any instances of an FBM17 using Equipment Control Block 34 (ECB34) do not have any upgrade solutions. Upgrade solutions are available for FBM17 when it is used with any of its other supported ECBs though.

FBM22 and FBM/ECB34 can be upgraded as 100 Series FBMs to a new/existing FCP280, FCP270, or ZCP270.

Configuration options for maintaining 100 Series FBMs, such as FBM22, with the supported control processors are discussed in *Field Control Processor 280 (FCP280)* (PSS 31H-1B11 B3), *Field Control Processor 270 (FCP270)* (PSS 21H-1B9 B3) and *Z-Module Control Processor 270 (ZCP270)* (PSS 21H-1B10 B3).

## **CALIBRATION**

The analog Fieldbus Modules are calibrated at the factory prior to shipment and do not require field calibration. In addition, discrete input/output Fieldbus Modules do not require field adjustments. Therefore, the Fieldbus Modules do not contain local (that is, module-mounted) manual controls or jumpers.

## RELATED PRODUCT SPECIFICATION SHEETS

For reference purposes, Table 4 lists the Product Specification Sheets (PSSs) for additional hardware and software elements in the DIN rail mounted subsystem. (PSSs for the FBMs are listed in Table 1 and Table 2.).

**Table 4. Related Product Specification Sheets**

| <b>PSS Number</b> | <b>Title</b>                                                        |
|-------------------|---------------------------------------------------------------------|
| PSS 21H-2W1 B3    | DIN Rail Mounted Subsystem Overview                                 |
| PSS 31H-2W2 B3    | DIN Rail Mounted Equipment Agency Certification                     |
| PSS 21H-2W3 B4    | DIN Rail Mounted Power Supplies - FPS400-24                         |
| PSS 21H-2W4 B4    | Termination Assembly Adapter Modules for 100 Series Upgrade         |
| PSS 21H-2W6 B4    | DIN Rail Mounted Modular Baseplates                                 |
| PSS 31H-2W7 B4    | DIN Rail Mounted Power Supplies - FPS240-24 and FPS120-24           |
| PSS 21H-2W8 B4    | 100 Series Conversion Mounting Structures                           |
| PSS 21H-2Y17 B4   | FBI200A Fieldbus Isolator/Filter                                    |
| PSS 21H-2Y18 B4   | FBI200 Fieldbus Isolator/Filter                                     |
| PSS 21H-2X1 B3    | DIN Rail Mounted FBM Enclosures, Overview - (for legacy Enclosures) |
| PSS 21H-2X8 B3    | G-Series Enclosures Overview - (for current Enclosures)             |
| PSS 21H-1B9 B3    | Field Control Processor 270 (FCP270)                                |
| PSS 21H-1B10 B3   | Z-Module Control Processor 270 (ZCP270)                             |
| PSS 31H-1B11 B3   | Field Control Processor 280 (FCP280)                                |

FUNCTIONAL SPECIFICATIONS

Software Requirements

- FCP280  
I/A Series software v9.0 or higher
- FCP270 OR ZCP270  
I/A Series software v8.6 or higher

Compatible I/A Series Control Processor  
Control Processor FCP280, FCP270, or ZCP270

Equipment Quantities

- FBMS HOSTED BY FCP280<sup>(2)</sup>  
200 Series FBMs only - 128 maximum when used exclusively with 200 Series FBMs  
Mix of 100 Series and 200 Series FBMs - Up to 96 200 Series FBMs and up to 64 100 Series FBMs  
100 Series FBMs only - 64 maximum when used exclusively with 100 Series FBMs  
Each Fieldbus port on the FCP280 baseplate supports up to 32 200 Series FBMs without FBI200A and mounting adapter, or up to 124 with FBI200As and FBI200A mounting adapter. However, the FCP280 cannot support more than 124 200 Series FBMs (that is, the total number of FBMs connected to all Fieldbus ports on the FCP280 baseplate) in this configuration.

Equipment Quantities (Continued)

- FBMS HOSTED BY FCP270<sup>(3)</sup>  
200 Series FBMs - 32 maximum (without FBI200A and mounting adapter) or 124 maximum (with FBI200As and FBI200A mounting adapters)
- FBMS HOSTED BY ZCP270<sup>(4)</sup>  
Up to 128 200 Series FBMs per ZCP270 with FCM100E (dependent upon the number of FCM100Es implemented)
- FBMS HOSTED BY FCM100E<sup>(4)</sup>  
200 Series FBMs - 32 maximum

(2) Depending on control processor sizing constraints (refer to *Field Control Processor 280 (FCP280) Sizing Guidelines and Excel Workbook* (B0700FY).)  
(3) Depending on control processor sizing constraints (refer to *Field Control Processor 270 (FCP270) Sizing Guidelines and Excel Workbook* (B0700AV).)  
(4) Depending on control processor sizing constraints (refer to *Z-Module Control Processor 270 (ZCP270) Sizing Guidelines and Excel Workbook* (B0700AW).)