


I/A Series® Software

PSS 21S-3H5 B4

Contact Output (COUT) Block

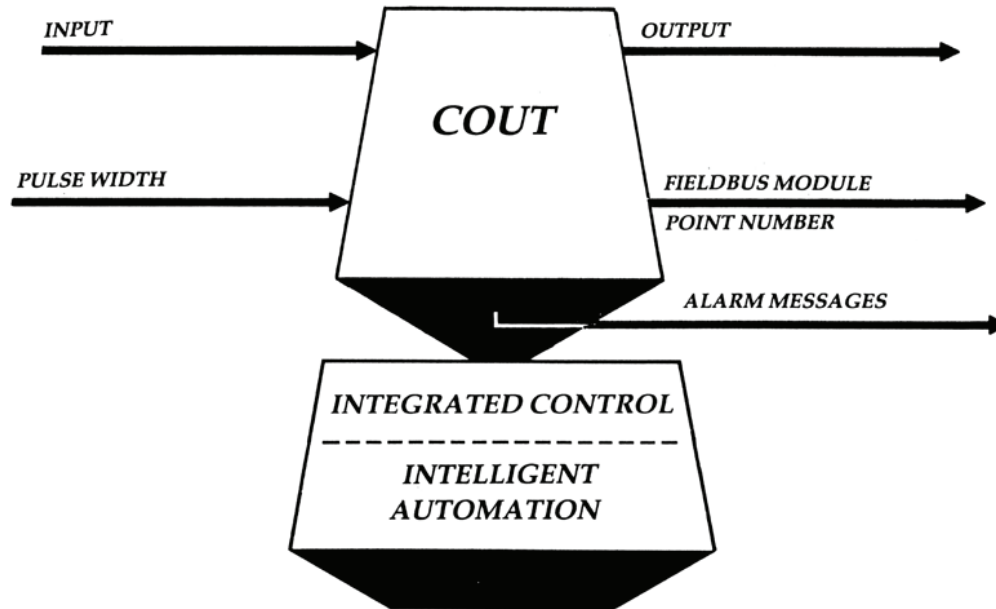

The Contact Output (COUT) block is a single channel, digital contact output block with optional pulse output. It controls contacts, alarms, status conditions, sequence steps, etc.

OVERVIEW

The COUT block provides Auto/Manual control of a single Boolean-type input that is addressed to a specific Fieldbus Module output point. Variable pulse widths (minimum scan period of block, up to 999 seconds) may be optionally output. An initialization output parameter is available for cascading the block state to other driving blocks.

STANDARD FEATURES

- ▶ Manual/Auto control of the output
- ▶ Bad Fieldbus Module detection
- ▶ Initialization state parameter

OPTIONS

- ▶ Bad alarming of the output signal. The output includes alarm indicator signals and user-defined alarm messages.
- ▶ Pulse option with variable pulse width

CP270 (WITH I/A SERIES V8.4 OR LATER) ADDITIONAL FEATURES

- ▶ Delayed alarming. A configurable timer delays alarm detection or return-to-normal messages for a specific alarm to reduce the number of alarm messages generated when a block parameter crosses back and forth over an alarm limit.
- ▶ Detection of fail-safe mode in the FBM, during which the block switches its input to a user-selected source for safety.



33 Commercial Street
Foxboro, MA 02035-2099
United States of America
www.foxboro.com
Inside U.S.: 1-866-746-6477
Outside U.S.: 1-508-549-2424
or contact your local Foxboro
representative.
Facsimile: 1-508-549-4999

Invensys, Foxboro, and I/A Series are trademarks of Invensys plc, its subsidiaries, and affiliates.
All other brand names may be trademarks of their respective owners.

Copyright 1987- 2008 Invensys Systems, Inc.
All rights reserved

MB 21A

Printed in U.S.A.

0608