

FBM201e Analog Input (0 to 20 mA) Interface Modules



The FBM201e Analog Input Interface Module provides eight dc current input channels.

FEATURES

Key features of the FBM201e module are:

- ▶ Eight 0 to 20 mA dc channels for input of analog sensor signals
- ▶ Each analog input channel is galvanically isolated from other channels and ground
- ▶ Compact, rugged design suitable for enclosure in Class G3 (harsh) environments
- ▶ Execution of an analog input application program that provides conversion time and configurable options for integration time and Rate of Change Limits
- ▶ High accuracy achieved by sigma-delta data conversions for each channel
- ▶ Termination Assemblies (TAs) for locally or remotely connecting field wiring to the FBM201e
- ▶ Termination Assemblies for per channel internally and/or externally loop powered transmitters.

OVERVIEW

Each FBM201e Analog Input Interface Module contains eight analog input channels, each channel accepting a 2-wire, dc input from an analog sensor such as a 4 to 20 mA transmitter.

The modules perform the signal conversion required to interface the electrical input signals from the field sensors to the optionally redundant fieldbus.

COMPACT DESIGN

The FBM201e module has a compact design, with a rugged extruded aluminum exterior for physical protection of the circuits. Enclosures specially designed for mounting the FBMs provide various levels of environmental protection, up to harsh environments per ISA Standard S71.04.

HIGH ACCURACY

For high accuracy, the module incorporates sigma-delta data conversion on a per-channel basis, which can provide a new analog input reading every 25 ms, and a configurable integration period to remove any process noise and power-line frequency noise.

Each time period, the FBM converts each analog input to a digital value, averages these values over the time period, and provides the averaged value to the controller.

EASY REMOVAL/REPLACEMENT

The module can be removed/replaced without removing field device termination cabling, power or communications cabling.

VISUAL INDICATORS

Light-emitting diodes (LEDs) incorporated into the front of the modules provide visual status indications of Fieldbus Module (FBM) functions.

MODULAR BASEPLATE MOUNTING

The module mounts on a modular baseplate (see Figure 1) which accommodates up to four or eight FBMs. The modular baseplate is either DIN rail mounted or rack mounted, and includes signal connectors for redundant fieldbus, redundant independent dc power, and termination cables.

FIELDBUS COMMUNICATION

A Fieldbus Communication Module or a Control Processor interfaces the redundant 2 Mbps module Fieldbus used by the FBMs. The FBM201e module accepts communication from either path (A or B) of the redundant 2 Mbps fieldbus – should one path fail or be disabled at the system level, the module continues communication over the active path.

TERMINATION ASSEMBLIES

Field I/O signals connect to the FBM subsystem via DIN rail mounted TAs (see Figure 1). The TAs used with the FBM201e module are described in “TERMINATION ASSEMBLIES AND CABLES” on page 7.

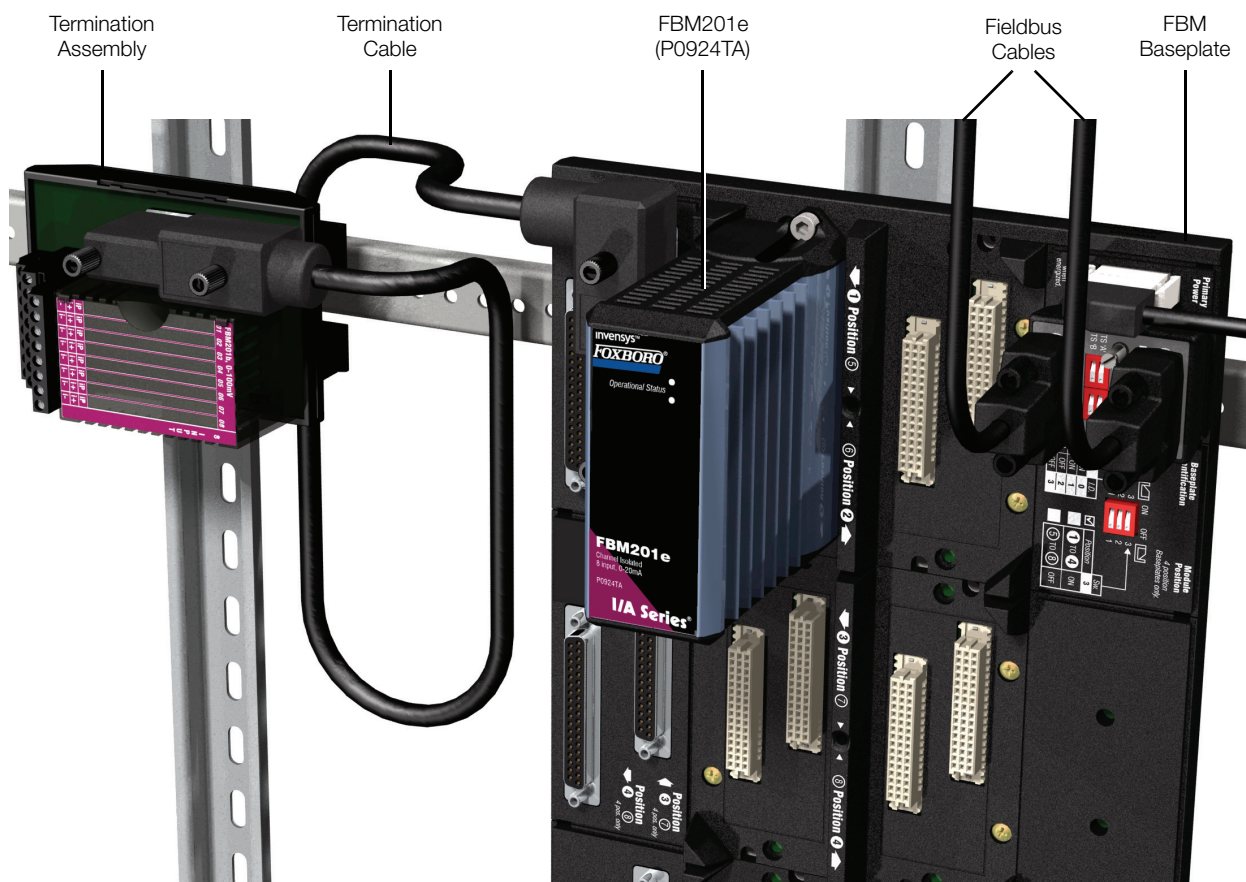


Figure 1. FBM201e Subsystem – Typical

FUNCTIONAL SPECIFICATIONS

Process I/O Communications

Communicates with its associated FCM or FCP via the redundant 2 Mbps module Fieldbus.

Input Channels

8 isolated and independent channels

Input Range (each channel)

0 to 20 mA dc

Input Channels (8)

ANALOG ACCURACY (INCLUDES LINEARITY)

$\pm 0.02\%$ of span

Accuracy temperature coefficient: ± 50 ppm/ $^{\circ}\text{C}$

FIELD DEVICE CABLING DISTANCE

Maximum distance of the field device from the FBM is a function of compliance voltage @20 mA (21.4 V dc), wire resistance, and voltage drop at the field device.

INPUT CHANNEL IMPEDANCE

61.5 Ω nominal

INPUT SIGNAL A/D CONVERSION

Each channel performs A/D signal conversion using an independent Sigma-Delta converter.

INTEGRATION PERIOD

Software configurable.

COMMON MODE REJECTION

>100 db at 50 or 60 Hz

NORMAL MODE REJECTION

>95 db at 50 or 60 Hz

LOOP SUPPLY

24 V dc $\pm 2.5\%$

OUTPUT IMPEDANCE

68 Ω

LOOP POWER SUPPLY PROTECTION

Each channel is channel-to-channel galvanically isolated, current limited, and voltage regulated. All analog inputs are limited by their design to less than 30 mA. If the current limit circuit shorted out, the current is limited to about 100mA.

Input Channel Isolation

Each channel is galvanically isolated from all other channels and earth (ground). The module/TA withstands, without damage, a potential of 600 V ac applied for one minute between any channel and ground, or between a given channel and any other channel.

WARNING

This does not imply that these channels are intended for permanent connection to voltages of these levels. Exceeding the limits for input voltages, as stated elsewhere in this specification, violates electrical safety codes and may expose users to electric shock.

Power Requirements

INPUT VOLTAGE RANGE (REDUNDANT)

24 V dc +5%, -10%

CONSUMPTION

7 W (maximum)

HEAT DISSIPATION

3 W (maximum)

Calibration Requirements

Calibration of the module and termination assembly is not required.

FUNCTIONAL SPECIFICATIONS (CONTINUED)

Regulatory Compliance

ELECTROMAGNETIC COMPATIBILITY (EMC)

European EMC Directive 89/336/EEC

Meets: EN 50081-2 Emission standard

EN 50082-2 Immunity standard

EN 61326 Annex A (Industrial

Levels)

CISPR 11, Industrial Scientific and Medical (ISM) Radio-frequency Equipment -

Electromagnetic Disturbance Characteristics

- Limits and Methods of Measurement

Meets Class A Limits

IEC 61000-4-2 ESD Immunity

Contact 4 kV, air 8 kV

IEC 61000-4-3 Radiated Field Immunity

10 V/m at 80 to 1000 MHz

IEC 61000-4-4 Electrical Fast

Transient/Burst Immunity

2 kV on I/O, dc power and communication lines

IEC 61000-4-5 Surge Immunity

2kV on ac and dc power lines; 1kV on I/O and communications lines

IEC 61000-4-6 Immunity to Conducted Disturbances Induced by Radio frequency Fields

10 V (rms) at 150 kHz to 80 MHz on I/O, dc power and communication lines

IEC 61000-4-8 Power Frequency Magnetic Field Immunity

30 A/m at 50 and 60 Hz

PRODUCT SAFETY

Underwriters Laboratories (UL) for U.S. and Canada

UL/UL-C listed as suitable for use in

UL/UL-C listed Class I, Groups A-D;

Division 2; temperature code T4 enclosure

based systems. These modules are also UL

and UL-C listed as associated apparatus for

supplying non-incendive communication

circuits for Class I, Groups A-D hazardous

locations when connected to specified

I/A Series® processor modules as described

in the *I/A Series DIN Rail Mounted*

Subsystem User's Guide (B0400FA).

Communications circuits also meet the

requirements for Class 2 as defined in

Article 725 of the National Electrical Code

(NFPA No.70) and Section 16 of the

Canadian Electrical Code (CSA C22.1).

Conditions for use are as specified in the

I/A Series DIN Rail Mounted Subsystem

User's Guide (B0400FA).

European Low Voltage Directive 73/23/EEC

and Explosive Atmospheres (ATEX) directive 94/9/EC

CENELEC (DEMKO) certified as

EEx nA [nL] IIC T4 for use in CENELEC

certified Zone 2 enclosure certified as

associated apparatus for supplying non-

incendive field circuits for Zone 2, Group IIC,

potentially explosive atmospheres when

connected to specified I/A Series processor

modules as described in the *I/A Series DIN*

Rail Mounted Subsystem User's Guide

(B0400FA). Also, see Table 1 on page 8.

ENVIRONMENTAL SPECIFICATIONS⁽¹⁾

Operating

TEMPERATURE

FBM201e
-20 to +70°C (-4 to +158°F)
Termination Assembly
-20 to +70°C (-4 to +158°F)

RELATIVE HUMIDITY

5 to 95% (noncondensing)

ALTITUDE

-300 to +3,000 m (-1,000 to +10,000 ft)

Storage

TEMPERATURE

-40 to +70°C (-40 to +158°F)

RELATIVE HUMIDITY

5 to 95% (noncondensing).

ALTITUDE

-300 to +12,000 m (-1,000 to +40,000 ft)

Contamination

Suitable for use in Class G3 (Harsh) environments as defined in ISA Standard S71.04, based on exposure testing according to EIA Standard 364-65, Class III.

Vibration

7.5 m/S² (0.75 g) from 5 to 500 Hz

PHYSICAL SPECIFICATIONS

Mounting

FBM201e

The module mounts on a modular baseplate. The baseplate can be mounted on a DIN rail (horizontally or vertically), or horizontally on a 19-inch rack using a mounting kit. Refer to *DIN Rail Mounted Modular Baseplates* (PSS 21H-2W6 B4) for details.

TERMINATION ASSEMBLY

The TA mounts on a DIN rail and accommodates multiple DIN rail styles including 32 mm (1.26 in) and 35 mm 1.38 in).

Mass

FBM201e

284 g (10 oz) approximate

TERMINATION ASSEMBLY

Compression
181 g (0.40 lb) approximate
Ring Lug
249 g (0.55 lb) approximate

Dimensions – FBM201e

HEIGHT

102 mm (4 in)
114 mm (4.5 in) with mounting lugs

WIDTH

45 mm (1.75 in)

DEPTH

104 mm (4.11 in)

Dimensions – Termination Assembly

See page 10

Part Number

FBM201e

P0924TA

TERMINATION ASSEMBLIES

See “FUNCTIONAL SPECIFICATIONS – TERMINATION ASSEMBLIES” on page 8

(1) The environmental limits of this module may be enhanced by the type of enclosure containing the module. Refer to the applicable Product Specification Sheet (PSS) which describes the specific type of enclosure that is to be used.

PHYSICAL SPECIFICATIONS (CONTINUED)

Termination Cables

CABLE LENGTHS

Up to 30 m (98 ft)

CABLE MATERIALS

Hypalon®/XLP

TERMINATION CABLE TYPE

Type 1 – See Table 2 on page 9

BASEPLATE TO MAIN TA CABLE CONNECTION

FBM Baseplate End

37-pin D-subminiature

Termination Assembly End

25-pin D-subminiature

Construction – Termination Assembly

MATERIAL

Polyamide (PA), compression

PA, ring lug

Field Termination Connections

COMPRESSION-TYPE ACCEPTED WIRING SIZES

Solid/Stranded/AWG

0.2 to 4 mm²/0.2 to 2.5 mm²/24 to 12 AWG

Stranded with Ferrules

0.2 to 2.5 mm² with or without plastic collar

RING-LUG TYPE ACCEPTED WIRING SIZES

#6 size connectors (0.375 in (9.5 mm))

0.5 to 4 mm²/22 AWG to 12 AWG

TERMINATION ASSEMBLIES AND CABLES

Field input signals connect to the FBM subsystem via DIN rail mounted Termination Assemblies, which are electrically passive (see Figure 1). TAs for the FBM201e module are available in the following forms:

- ▶ Compression screw type using Polyamide (PA) material
- ▶ Ring lug type using Polyamide (PA) material

See “FUNCTIONAL SPECIFICATIONS – TERMINATION ASSEMBLIES” on page 8 for a list of TAs used with the FBM201e module.

A removable termination cable connects the DIN rail mounted TA to the FBM via a field connector on the baseplate in which the FBM is installed. Termination cables are available in Hypalon® XLP.

Termination cables are available in a variety of lengths, up to 30 meters (98 feet), allowing the Termination Assembly to be mounted in either the enclosure or in an adjacent enclosure. See Table 2 for a list of termination cables used with the TAs for the FBM201e module.

FUNCTIONAL SPECIFICATIONS – TERMINATION ASSEMBLIES

FBM Type	Input Signal	TA Part Number ^(a)	Termination Type ^(b)	TA Cable Type ^(c)	TA Certification Type ^(d)
		PA			
FBM201e	8 channels, 0 to 20 mA dc, passive feedthrough with FBM201e for channel isolation	P0916XG P0917JK	C RL	1	1, 2

(a) PA is polyamide rated from -20 to +70°C (-4 to +158°F).

(b) C = TA with compression terminals; RL = TA with ring lug terminals.

(c) See Table 2 for cable part numbers and specifications.

(d) See Table 1 for Termination Assembly certification definitions.

Table 1. Certification for Termination Assemblies

Type	Certification ^(a)
Type 1	TAs are UL/UL-C listed as suitable for use in Class I; Groups A-D; Division 2 temperature code T4 hazardous locations. They are CENELEC (DEMKO) certified EEx nA [nL] IIC T4 for use in Zone 2 potentially explosive atmospheres.
Type 2	TAs are UL/UL-C listed as associated apparatus for supplying non-incendive field circuits Class I; Groups A-D; Division 2 hazardous locations when connected to specified DIN rail mounted FBMs and field circuits meeting entity parameter constraints specified in <i>DIN Rail Mounted Subsystem User's Guide</i> (B0400FA). They are also CENELEC (DEMKO) certified as associated apparatus for supplying field circuits for Group IIC, Zone 2 potentially explosive atmospheres. Field circuits are also Class 2 limited energy (60 V dc, 30 V ac, 100 VA or less) if customer-supplied equipment meets Class 2 limits.

(a) All TAs are UL/UL-C listed to comply with applicable ordinary location safety standards for fire and shock hazards. Hazardous location types comply with ATEX directive for II 3 G use. They also comply with the requirements of the European Low Voltage Directive. All listings/certifications require installation and use within the constraints specified in *DIN Rail Mounted Subsystem User's Guide* (B0400FA) and the conditions stated in UL and DEMKO reports.

Table 2. Cables Types and Part Numbers


Cable Length m (ft)	Type 1 H/XLPE ^(a)
0.5 (1.6)	P0916VA
1.0 (3.2)	P0916VB
2.0 (6.6)	P0931RR
3.0 (9.8)	P0916VC
5.0 (16.4)	P0916VD
10.0 (32.8)	P0916VE
15.0 (49.2)	P0916VF
20.0 (65.6)	P0916VG
25.0 (82.0)	P0916VH
30.0 (98.4)	P0916VJ

(a) H/XLPE is Hypalon outer jacket and XLPE (cross-linked polyethylene) primary conductor insulation.


DIMENSIONS – NOMINAL

[mm]
in

Compression TA: P0916XG

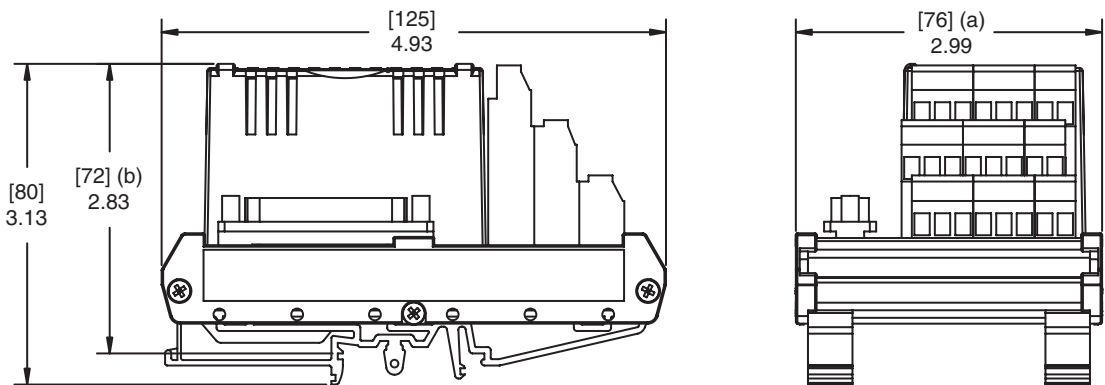

Ring Lug TA: P0917JK

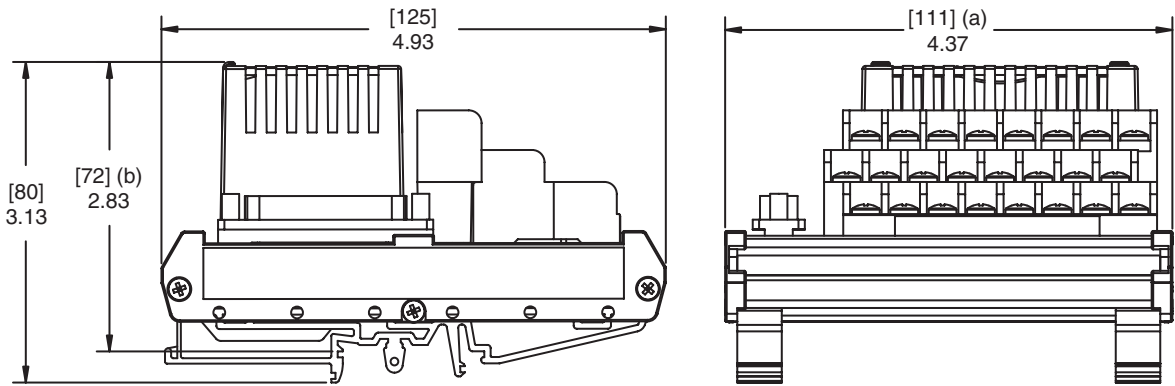

(a) Overall width – for determining DIN rail loading.
(b) Height above DIN rail (add to DIN rail height for total).

RELATED PRODUCT SPECIFICATION SHEETS (PSS)

PSS Number	Description
PSS 21H-2W1 B3	DIN Rail Mounted FBM Subsystem Overview
PSS 21H-2W2 B3	DIN Rail Mounted FBM Equipment, Agency Certification
PSS 21H-2W6 B4	DIN Rail Mounted Modular Baseplates
PSS 21S-3B2 B3	Control Processor 270 (CP270) Integrated Control Software

Invensys Operations Management
5601 Granite Parkway Suite 1000
Plano, TX 75024
United States of America
<http://iom.invensys.com>

Global Customer Support
Inside U.S.: 1-866-746-6477
Outside U.S.: 1-508-549-2424 or contact
your local Invensys representative.
Email: support@invensys.com
Website: <http://support.ips.invensys.com>

Invensys, Foxboro, I/A Series, and the Invensys logo are
trademarks of Invensys plc, its subsidiaries, and affiliates.
All other brands and product names may be the
trademarks of their respective owners.

Copyright 2010 Invensys Systems, Inc. All rights reserved.
Unauthorized duplication or distribution is strictly
prohibited.