

Compact FBM238, Digital 24DI/8DO Module



Many plant situations, such as Motor Control Center controls, require several inputs for each output. The Compact FBM238 contains 24 discrete input and eight discrete output channels that are compatible with voltages and currents commonly found in industrial plants. An external power supply is used to energize the field circuits.

OVERVIEW

The Compact FBM238 24DI/8DO Module provides twenty-four digital inputs with eight digital output channels. Associated Termination Assemblies (TAs) provide for discrete nominal inputs of 30 V dc, 60 V dc, 120 V ac/125 V dc or 240 V ac and nominal outputs of 60 V dc, 120 V ac/125 V dc or 240 V ac. The module performs signal conversion required to interface the electrical input signals from the field sensors to the Module Fieldbus.

Depending on the type of I/O signal required, the TAs support current limiting devices, high voltage attenuation circuits, optical isolation and external power source connections.

FEATURES

Key features of the Compact FBM238 are:

- ▶ Twenty-four digital input channels, used for either contact sensing, or dc voltage monitoring
- ▶ Eight digital output channels, used for either dc output switching with an external source (e.g. to control powering of various external loads), or dc output switching with an internal source only (e.g. to power external solid state relays or other similar devices)
- ▶ Compact, rugged design suitable for enclosure in Class G3 (harsh) environments
- ▶ Supports discrete input signals at voltages of:
 - 30 V dc/60 V dc
 - 120 V ac/125 V dc
 - 240 V ac
- ▶ Supports output switching at voltages of:
 - 60 V dc
 - 120 V ac/125 V dc
 - 240 V ac
- ▶ Executes the programs for Digital I/O (ECB5), and Ladder Logic (ECB8)
- ▶ Various Termination Assemblies (TAs) provide for per-channel isolation and contain:
 - High voltage attenuation and optical isolation for inputs
 - External power connection for device excitation.
 - Output current limiting

COMPACT DESIGN

The Compact FBM238's design is narrower than the standard 200 Series FBMs. It has a rugged Acrylonitrile Butadiene Styrene (ABS) exterior for physical protection of the circuits. Enclosures specially designed for mounting the FBMs provide various levels of environmental protection, up to harsh environments, per ISA Standard S71.04.

VISUAL INDICATORS

Light-emitting diodes (LEDs) incorporated into the front of the module provide visual indication of the Fieldbus Module operational status, as well as the discrete states of the individual input/output points.

EASY REMOVAL/REPLACEMENT

The modules mount on a Compact 200 Series baseplate. Two screws on the FBM secure each module to the baseplate.

The module can be removed/replaced without removing field device termination cabling, power, or communication cabling.

FIELDBUS COMMUNICATION

A Fieldbus Communications Module or a Control Processor interfaces to the 2 Mbps module Fieldbus used by the FBMs. The Compact FBM238 accepts communication from either path (A or B) of the 2 Mbps Fieldbus — should one path fail or be switched at the system level, the module continues communication over the active path.

FIELD I/O SIGNALS

Field I/O signals connect to the FBM subsystem via DIN rail mounted TAs. The TAs used with Compact FBM238 are described in "TERMINATION ASSEMBLIES AND CABLES" on page 6.

FUNCTIONAL SPECIFICATIONS

Input/Output Channels

24 group isolated digital input channels and eight group isolated digital output channels

Filter/Debounce Time

Configurable (No Filtering, 4, 8, 16 or 32 ms)

Voltage Monitor (Compact FBM238 with feed through TA RH924VD)

INPUT

30 V dc maximum applied voltage

ON-STATE VOLTAGE

15 to 30 V dc

OFF-STATE VOLTAGE

0 to 5 V dc

CURRENT INPUT FOR ON-STATE

2.3 mA maximum at 30 V dc

SOURCE RESISTANCE LIMITS

ON-STATE

1 k Ω (maximum) at 15 V dc

OFF-STATE

100 k Ω (minimum) at 30 V dc

Contact Sense (Compact FBM238 with feed through TA RH924VG)

CONTACT SUPPLY

24 V dc nominal (supplied by FBM through the TA)

CONTACT CURRENT

1.8 mA dc nominal

SOURCE RESISTANCE LIMITS

ON-STATE

1 k Ω (maximum) at 15 V dc

OFF-STATE

100 k Ω (minimum) at 30 V dc

Output (Compact FBM238 with feed through TAs RH924VD or RH924VG)

APPLIED VOLTAGE (EXTERNAL)

60 V dc maximum

LOAD CURRENT

0.24 A dc maximum per channel

2.0 A dc maximum per TA

INDUCTIVE LOADS

Outputs may require a protective diode or MOV connected across the load

Isolation

Input and output channels are group isolated from each other and earth (ground). For details, refer to the *Standard and Compact 200 Series Subsystem User's Guide* (B0400FA). The module withstands, without damage, a potential of 600 V ac applied for one minute between the group isolated channels or between either set of group isolated channels and ground.

CAUTION

This does not imply that these channels are intended for permanent connection to voltages of these levels. Exceeding the limits for input voltages, as stated elsewhere in this specification, violates electrical safety codes and may expose users to electric shock.

Communication

Communicates with its associated FCM or FCP via the module Fieldbus

Power Requirements

INPUT VOLTAGE RANGE

24 V dc +5%, -10%

MODULE CONSUMPTION

2.65 W (maximum) at 24 V dc

MODULE HEAT DISSIPATION

5.3 W (maximum) at 2 A total load and all inputs at 30 V dc

Calibration Requirements

Calibration of the module is not required.

FUNCTIONAL SPECIFICATIONS (CONTINUED)

Regulatory Compliance

ELECTROMAGNETIC COMPATIBILITY (EMC)

European EMC Directive 2014/30/EU

EN 61326:2013 Class A Emissions and
Industrial Immunity levels

RoHS COMPLIANCE

Complies with European RoHS Directive
2002/95/EC and Recast RoHS Directive
2011/65/EU.

PRODUCT SAFETY

*Underwriters Laboratories (UL) for U.S. and
Canada*

UL/UL-C listed as suitable for use in Class I,
Groups A-D; Division 2; temperature code
T4 enclosure based systems.

Communications circuits also meet the
requirements for Class 2 as defined in Article
725 of the National Electrical Code (NFPA
No.70) and Section 16 of the Canadian
Electrical Code (CSA C22.1). Conditions for
use are as specified in the *Standard and
Compact 200 Series Subsystem User's
Guide* (B0400FA).

*European Low Voltage Directive
2014/35/EU and Explosive Atmospheres
(ATEX) directive 2014/34/EU*

ATEX (DEMKO) Ex nA IIC T4 Gc certified
when connected as described in the
*Standard and Compact 200 Series
Subsystem User's Guide* (B0400FA). For use
in an enclosure suited for an ATEX Zone 2
classified area.

ENVIRONMENTAL SPECIFICATIONS

Operating

TEMPERATURE

Compact FBM238
-20 to + 60°C (-4 to +140°F)

RELATIVE HUMIDITY

5 to 95% (noncondensing)

ALTITUDE

-300 to +3,000 m (-1,000 to +10,000 ft)

Storage

TEMPERATURE

-40 to +85°C (-40 to +185°F)

RELATIVE HUMIDITY

5 to 95% (noncondensing)

ALTITUDE

-300 to +12,000 m (-1,000 to +40,000 ft)

Contamination

Suitable for use in Class G3 (Harsh) environments as defined in ISA Standard S71.04, based on exposure testing according to EIA Standard 364-65, Class III.

Vibration

0.75 m/S² (5 to 500 Hz)

PHYSICAL SPECIFICATIONS

Mounting

MODULE

The Compact FBM238 mounts on a Compact 200 Series 16-slot horizontal baseplate. The baseplate can be mounted on a horizontal DIN rail, or horizontally on a 19-inch rack using a mounting kit.

Refer to *Compact 200 Series 16-Slot Horizontal Baseplate* (PSS 31H-2C200) for details.

TERMINATION ASSEMBLY

The TA mounts on a DIN rail and accommodates multiple DIN rail styles including 32 mm (1.26 in) and 35 mm 1.38 in)

Weight

MODULE

185 g (6.5 oz) approximate

Dimensions

COMPACT FBM238

Height

130 mm (5.12 in)

Width

25 mm (0.98 in)

Depth

150 mm (5.9 in) - Including baseplate connectors, 139 mm (5.46 in)

TERMINATION ASSEMBLY

Compression Screw - Refer to page 19

Part Numbers

COMPACT FBM238

RH101GJ

TERMINATION ASSEMBLIES

Refer to "FUNCTIONAL SPECIFICATIONS - STANDARD TERMINATION ASSEMBLIES" on page 7, "FUNCTIONAL SPECIFICATIONS - MAIN TERMINATION ASSEMBLIES" on page 8 and "FUNCTIONAL SPECIFICATIONS - EXPANSION TERMINATION ASSEMBLIES" on page 15.

Termination Cables

CABLE LENGTHS

Up to 30 m (98 ft)

CABLE MATERIALS

Polyurethane or Low Smoke Zero Halogen (LSZH)

TERMINATION CABLE TYPE

Baseplate to Main TA

Type 4 - Refer to Table 2

Main TA to Expansion TA

Type 6 - Refer to Table 3

BASEPLATE TO MAIN TA CABLE CONNECTION

FBM Baseplate End

37-pin D-subminiature

Termination Assembly End

37-pin D-subminiature

PHYSICAL SPECIFICATIONS (CONTINUED)

MAIN TA TO EXPANSION TA CABLE CONNECTION

Main TA End

25-pin D-subminiature

Expansion TA End

37-pin D-subminiature

Construction - Termination Assembly

MATERIAL

Polyamide (PA), compression

Field Termination Connections

COMPRESSION - ACCEPTED WIRING SIZES

Solid/Stranded/AWG

0.2 to 4 mm²/0.2 to 2.5 mm²/24 to 12 AWG

Stranded with Ferrules

0.2 to 2.5 mm² with or without plastic collar

TERMINATION ASSEMBLIES AND CABLES

General Description

Field I/O signals connect to the FBM subsystem via DIN rail mounted termination assemblies (TAs). Multiple types of TAs are available with the Compact FBM238 to provide I/O signal connections, signal conditioning, optical isolation from signal surges and external power connections for field devices as required by the particular FBM. Since these features are built into the termination assemblies (where required), in most applications there is no need for additional termination equipment for field circuit functions such as circuit protection or signal conditioning (including fusing and power distribution).

The DIN rail mounted termination assemblies connect to the FBM subsystem baseplate by means of removable termination cables. The cables are available in a variety of lengths, up to 30 meters (98 feet), allowing the termination assemblies to be mounted in either the enclosure or in an adjacent enclosure. Refer to "Cable Types (Baseplate to Main TA Cables) and Part Numbers - Type 4" on page 18 and "Cable Types (Main TA to Expansion TA Cables) and Part Numbers" on page 18 for termination cable part numbers and specifications.

Discrete Inputs/Outputs

Various termination assemblies are available to support the interfacing of field signals to the low level FBM I/O circuits. Active termination assemblies support input/output signal conditioning for the FBM as well as channel isolation. The signal conditioning circuits are located on daughter boards that are mounted under the component covers of the termination assemblies. To condition signals, these termination assemblies provide optical isolation, current limiting, voltage attenuation and optional terminal blocks to connect externally supplied excitation voltage.

FUNCTIONAL SPECIFICATIONS - STANDARD TERMINATION ASSEMBLIES

FBM Type	Input Signal	Output Signal	TA Part No. ^(a)	Term. Type (b)	BP to TA Cable (c)	TA Cert. Type (d)
			PA			
Compact FBM238	24 channel, Voltage Monitor, external source 30 V dc maximum applied voltage Logic Zero – 0 to 5 V dc Logic One – 15 to 30 V dc 2.2 mA typical at 30 V dc 1 K Ω Maximum On-state resistance 100 K Ω Minimum Off-state resistance	8 channel output switch, external source 60 V dc maximum voltage 0.25 A dc maximum current 2.0 A dc maximum current per FBM 0.25 mA dc maximum off-state leakage current 0.4 A over-current fuse	RH924VD	C	4	1, 2, 4
Compact FBM238	24 channel, Contact Sense, internal source 24 V dc nominal open circuit voltage 7 mA nominal maximum current 2.2 mA typical at 30 V dc 1 K Ω Maximum On-state resistance 100 K Ω Minimum Off-state resistance	8 channel output switch, external source 60 V dc maximum voltage 0.25 A dc maximum current 2.0 A dc maximum current per FBM 0.25 mA dc maximum off-state leakage current 0.4 A over-current fuse	RH924VG	C	4	1, 2, 4

- (a) PA is Polyamide rated from -20 to +70°C (-4 to +158°F).
 (b) C = TA with compression terminals, RL = TA with ring lug terminals.
 (c) Refer to Table 2 for cable part numbers and specifications.
 (d) Refer to Table 1 Termination Assembly certification definitions.

FUNCTIONAL SPECIFICATIONS - MAIN TERMINATION ASSEMBLIES

FBM Type	Input Signal	Output Signal	TA Part Number	Termination	BP to Main TA Cable	TA Certification
			PA ^(a)	Type ^(b)	Type ^(c)	Type ^(d)
Compact FBM238	When replacing a main FBM09A/B: Voltage Monitor external source 130 V dc Maximum voltage Logic Zero: 0 to 5 V dc Logic One: 15 to 130 V dc 2.2 mA typical 5 to 130 V dc 1 K Ω Maximum On-state resistance 100 K Ω Minimum Off-state resistance	When replacing a main FBM09A/C: Output Switch external source 60 V dc Maximum voltage 0.5 V maximum voltage drop @ 0.5 A 0.5 A maximum current 0.75 A current limit Shorted load duration: indefinite (duty-cycle limited) 1.0 mA maximum off-state leakage	RH924HE	C	4	1, 2, 4
	When replacing a main FBM09C/D: Contact sense internal source 24 V dc $\pm 10\%$ Open circuit voltage 2.5 mA maximum short circuit current 1 K Ω Maximum On-state resistance 100 K Ω Minimum Off-state resistance	When replacing a main FBM09B/D: output switch internal source 11 V dc ± 2 V Open circuit voltage Source resistance 680 Ω nominal Shorted load duration: indefinite 0.5 mA maximum off-state leakage				

FUNCTIONAL SPECIFICATIONS - MAIN TERMINATION ASSEMBLIES (CONTINUED)

FBM Type	Input Signal	Output Signal	TA Part Number	Termination	BP to Main TA Cable	TA Certification
			PA(a)	Type(b)	Type(c)	Type(d)
Compact FBM238	When replacing a main FBM10: Voltage Monitor, external source 132 V ac Maximum voltage Logic Zero: 0 to 20 V ac Logic One: 79 to 132 V ac 2.2 mA typical 20 to 132 V ac 1 K Ω Maximum On-state resistance 100 K Ω Minimum Off-state resistance	When replacing a main FBM10: Output Switch external source 132 V ac Maximum voltage 0.4 V maximum voltage drop @ 1 A 2 A maximum current per channel 12 A maximum current per TA 3 A current limit 24 A surge current limit for 10 msec Shorted load duration: indefinite (duty-cycle limited) 3 mA maximum off-state leakage	RH924HG	C	4	1, 4

FUNCTIONAL SPECIFICATIONS - MAIN TERMINATION ASSEMBLIES (CONTINUED)

FBM Type	Input Signal	Output Signal	TA Part Number	Termination	BP to Main TA Cable	TA Certification
			PA ^(a)	Type ^(b)	Type ^(c)	Type ^(d)
Compact FBM238	When replacing a main FBM11: Voltage Monitor 264 V ac Maximum voltage Logic Zero: 0 to 40 V ac Logic One: 164 to 264 V ac 2.2 mA typical 40 to 264 V ac 1 K Ω Maximum On-state resistance 100 K Ω Minimum Off-state resistance	When replacing a main FBM11: Output Switch external source 264 V ac Maximum voltage 0.6 V maximum voltage drop @ 0.5 A 1 A maximum current per channel 7 A maximum current per TA 1.5 A current limit 12 A surge current limit for 10 msec Shorted load duration: indefinite (duty-cycle limited) 2.5 mA maximum off-state leakage	RH924HJ	C	4	1

FUNCTIONAL SPECIFICATIONS - MAIN TERMINATION ASSEMBLIES (CONTINUED)

FBM Type	Input Signal	Output Signal	TA Part Number	Termination	BP to Main TA Cable	TA Certification
			PA(a)	Type(b)	Type(c)	Type(d)
Compact FBM238	When replacing a main FBM26A: Voltage Monitor, external source 150 V dc Maximum voltage Logic Zero: 0 to 10 V dc Logic One: 33 to 150 V dc 2.5 mA typical 10 to 150 V dc 1 K Ω Maximum On-state resistance 100 K Ω Minimum Off-state resistance	When replacing a main FBM26A: Output Switch external source 150 V dc Maximum voltage 0.4 V maximum voltage drop @ 1 A 2 A maximum current per channel 12 A maximum current per TA 2.3 A current limit 20 A surge current limit, 20 ms Shorted load duration: indefinite (duty-cycle limited) 2 mA maximum off-state leakage	RH924HU	C	4	1, 2, 4

FUNCTIONAL SPECIFICATIONS - MAIN TERMINATION ASSEMBLIES (CONTINUED)

FBM Type	Input Signal	Output Signal	TA Part Number	Termination	BP to Main TA Cable	TA Certification
			PA ^(a)	Type ^(b)	Type ^(c)	Type ^(d)
Compact FBM238	When replacing a main FBM26B: Contact Sense internal source 48 V dc nominal open circuit voltage 2.5 mA $\pm$ 20% short circuit current 1 K Ω Maximum On-state resistance 100 K Ω Minimum Off-state resistance	When replacing a main FBM26B: Output Switch external source 150 V dc Maximum voltage 0.4 V maximum voltage drop @ 1 A 2 A maximum current per channel 12 A maximum current per TA 2.3 A current limit 20 A surge current limit, 20 ms Shorted load duration: indefinite (duty-cycle limited) 2 mA maximum off-state leakage	RH924HV	C	4	1, 2, 4

FUNCTIONAL SPECIFICATIONS - MAIN TERMINATION ASSEMBLIES (CONTINUED)

FBM Type	Input Signal	Output Signal	TA Part Number	Termination	BP to Main TA Cable	TA Certification
			PA(a)	Type(b)	Type(c)	Type(d)
Compact FBM238	When replacing a main FBM26C: Contact Sense external source on channel 1 150 V dc Maximum voltage Logic Zero: 0 to 10 V dc Logic One: 33 to 150 V dc 2.5 mA typical 10 to 150 V dc 1 K Ω Maximum On-state resistance 100 K Ω Minimum Off-state resistance	When replacing a main FBM26C: Output Switch external source 150 V dc Maximum voltage 0.4 V maximum voltage drop @ 1 A 2 A maximum current per channel 12 A maximum current per TA 2.3 A current limit 20 A surge current limit, 20 ms Shorted load duration: indefinite (duty-cycle limited) 2 mA maximum off-state leakage	RH924HW	C	4	1, 2, 4

FUNCTIONAL SPECIFICATIONS - MAIN TERMINATION ASSEMBLIES (CONTINUED)

FBM Type	Input Signal	Output Signal	TA Part Number	Termination	BP to Main TA Cable	TA Certification
			PA ^(a)	Type ^(b)	Type ^(c)	Type ^(d)
Compact FBM238	When replacing a main FBM41A: Voltage Monitor external source 60 V dc Maximum voltage Logic Zero: 0 to 5 V dc Logic One: 15 to 60 V dc 6 mA maximum input current 1 KΩ Maximum On-state resistance 100 KΩ Minimum Off-state resistance When replacing a main FBM41C: Contact sense internal source 24 V dc $\pm$20% Open circuit voltage 5 mA maximum short circuit current 1 KΩ Maximum On-state resistance 100 KΩ Minimum Off-state resistance	When replacing a main FBM41A/C: Output Switch external source 60 V dc Maximum voltage 0.4 V maximum voltage drop @ 1 A 2.25 A maximum current 12 A maximum current per TA 10 A surge current limit for 20 msec maximum Shorted load duration: indefinite (duty-cycle limited) 0.5 mA maximum off-state leakage	RH924JA	C	4	1, 2, 4

(a) PA is Polyamide rated from -20 to +70°C (-4 to +158°F).

(b) C = TA with compression terminals; RL = TA with ring lug terminals.

(c) See Table 2 for cable part numbers and specifications.

(d) See Table 1 for Termination Assembly certification definitions.

FUNCTIONAL SPECIFICATIONS - EXPANSION TERMINATION ASSEMBLIES

FBM Type	I/O Signal	TA Part Number	Termination	Main TA to Exp. TA Cable	TA Certification
		PA(a)	Type(b)	Type(c)	Type(d)
Compact FBM238	When replacing an expansion FBM12A/B (16 input voltage monitor/contact sense), connect this TA to the main TA. Input specifications are the same as for TA RH924HE above, on page 8.	RH924HB	C	6	1, 2, 4
Compact FBM238	When replacing an expansion FBM13 (16 input 120 V ac voltage monitor), connect this TA to the main TA. Input specifications are the same as for TA RH924HG above, on page 9.	RH924HD	C	6	1, 4
Compact FBM238	When replacing an expansion FBM21 (16 input 240 V ac voltage monitor), connect this TA to the main TA. Input specifications are the same as for TA RH924HJ above, on page 10.	RH924HM	C	6	1
Compact FBM238	When replacing an expansion FBM25A (16 input 125 V dc voltage monitor), connect this TA to the main TA. Input specifications are the same as for TA RH924HU above, on page 11.	RH924HR	C	6	1, 2, 4

FUNCTIONAL SPECIFICATIONS - EXPANSION TERMINATION ASSEMBLIES (CONTINUED)

FBM Type	I/O Signal	TA Part Number	Termination	Main TA to Exp. TA Cable	TA Certification
		PA(a)	Type(b)	Type(c)	Type(d)
Compact FBM238	When replacing an expansion FBM25B (16 input contact sense (internal source)), connect this TA to the main TA. Input specifications are the same as for TA RH924HV above, on page 12.	RH924HS	C	6	1, 2, 4
Compact FBM238	When replacing an expansion FBM25C (16 input contact sense (external source)), connect this TA to the main TA. Input specifications are the same as for TA RH924HW above, on page 13.	RH924HT	C	6	1, 2, 4

(a) PA is Polyamide rated from -20 to +70°C (-4 to +158°F).

(b) C = TA with compression terminals; RL = TA with ring lug terminals.

(c) See Table 2 for cable part numbers and specifications.

(d) See Table 1 for Termination Assembly certification definitions.

Table 1. Certifications for Termination Assemblies

Type	Certification
Type 1	TAs are UL/UL-C listed as suitable for use in Class I; Groups A-D; Division 2 temperature code T4 hazardous locations. They are DEMKO certified Ex nA IIC T4 Gc for use in Zone 2 potentially explosive atmospheres.
Type 2	TAs are UL/UL-C listed for supplying field circuits Class I; Groups A-D; Division 2 hazardous locations when connected to specified 200 Series FBMs and field circuits meeting entity parameter constraints specified in <i>Standard and Compact 200 Series Subsystem User's Guide</i> (B0400FA). They are also DEMKO certified for supplying field circuits for Group IIC, Zone 2 potentially explosive atmospheres. Field circuits are also Class 2 limited energy (60 V dc, 30 V ac, 100 VA or less) if customer-supplied equipment meets Class 2.
Type 3	Same as Type 2 above except that only input circuits are non-incendive/Class 2.
Type 4	All field circuits are NEC/CEC Class 2 limited energy if customer-supplied equipment meets Class 2 limits.

Table 2. Cable Types (Baseplate to Main TA Cables) and Part Numbers - Type 4

Cable Length m (ft)	Type 4 P/PVC^(a)	Type 4 LSZH^(b)
0.5 (1.6)	RH100CJ	RH100BN
1.0 (3.2)	RH100CK	RH100BP
1.5 (4.9)	RH100EQ	RH100EN
2.0 (6.6)	RH100CL	RH100BQ
3.0 (9.8)	RH100CM	RH100BR
5.0 (16.4)	RH100CN	RH100BS
10.0 (32.8)	RH100CP	RH100BT
15.0 (49.2)	RH100CQ	RH100BU
20.0 (65.6)	RH100CR	RH100BV
25.0 (82.0)	RH100CS	RH100BW
30.0 (98.4)	RH100CT	RH100BX

(a) P/PVC is polyurethane outer jacket and semi-rigid PVC primary conductor insulation. PVC is rated from -20 to +70°C (-4 to 158°F).

(b) Low smoke zero halogen or low smoke free of halogen (LSZH) is a material classification used for cable jacketing. LSZH is composed of thermoplastic or thermoset compounds that emit limited smoke and no halogen when exposed to high sources of heat. Temperature range: -40 to +105°C (-40 to +221°F)

Table 3. Cable Types (Main TA to Expansion TA Cables) and Part Numbers

Cable Length m (ft)	Type 6 P/PVC^(a)	Type 6 LSZH^(b)
0.75 (2.5)	RH924CK	RH928CQ


(a) P/PVC is polyurethane outer jacket and semi-rigid PVC primary conductor insulation. PVC is rated from -20 to +70°C (-4 to 158°F). These cables are no longer available for purchase.

(b) Low smoke zero halogen or low smoke free of halogen (LSZH) is a material classification used for cable jacketing. LSZH is composed of thermoplastic or thermoset compounds that emit limited smoke and no halogen when exposed to high sources of heat. Temperature range: -40 to +105°C (-40 to +221°F)

DIMENSIONS – NOMINAL

[mm]
in

Compression Termination Assemblies

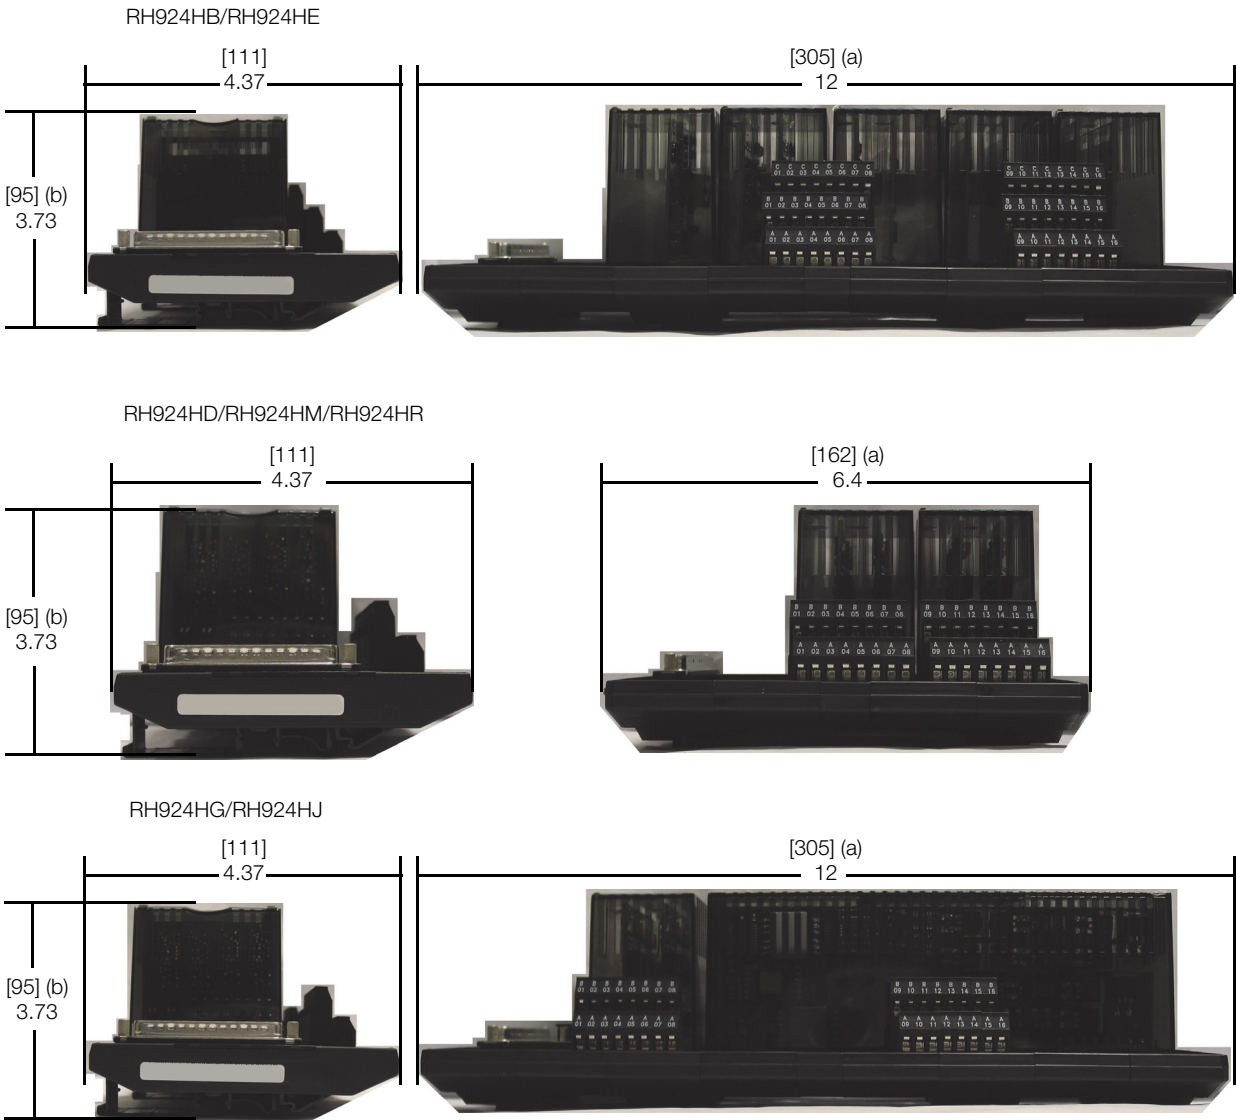


(a) Overall width — for determining DIN rail loading.
(b) Height above DIN rail (add to DIN rail height for total).

DIMENSIONS – NOMINAL (CONTINUED)

[mm]
in

Compression Termination Assemblies

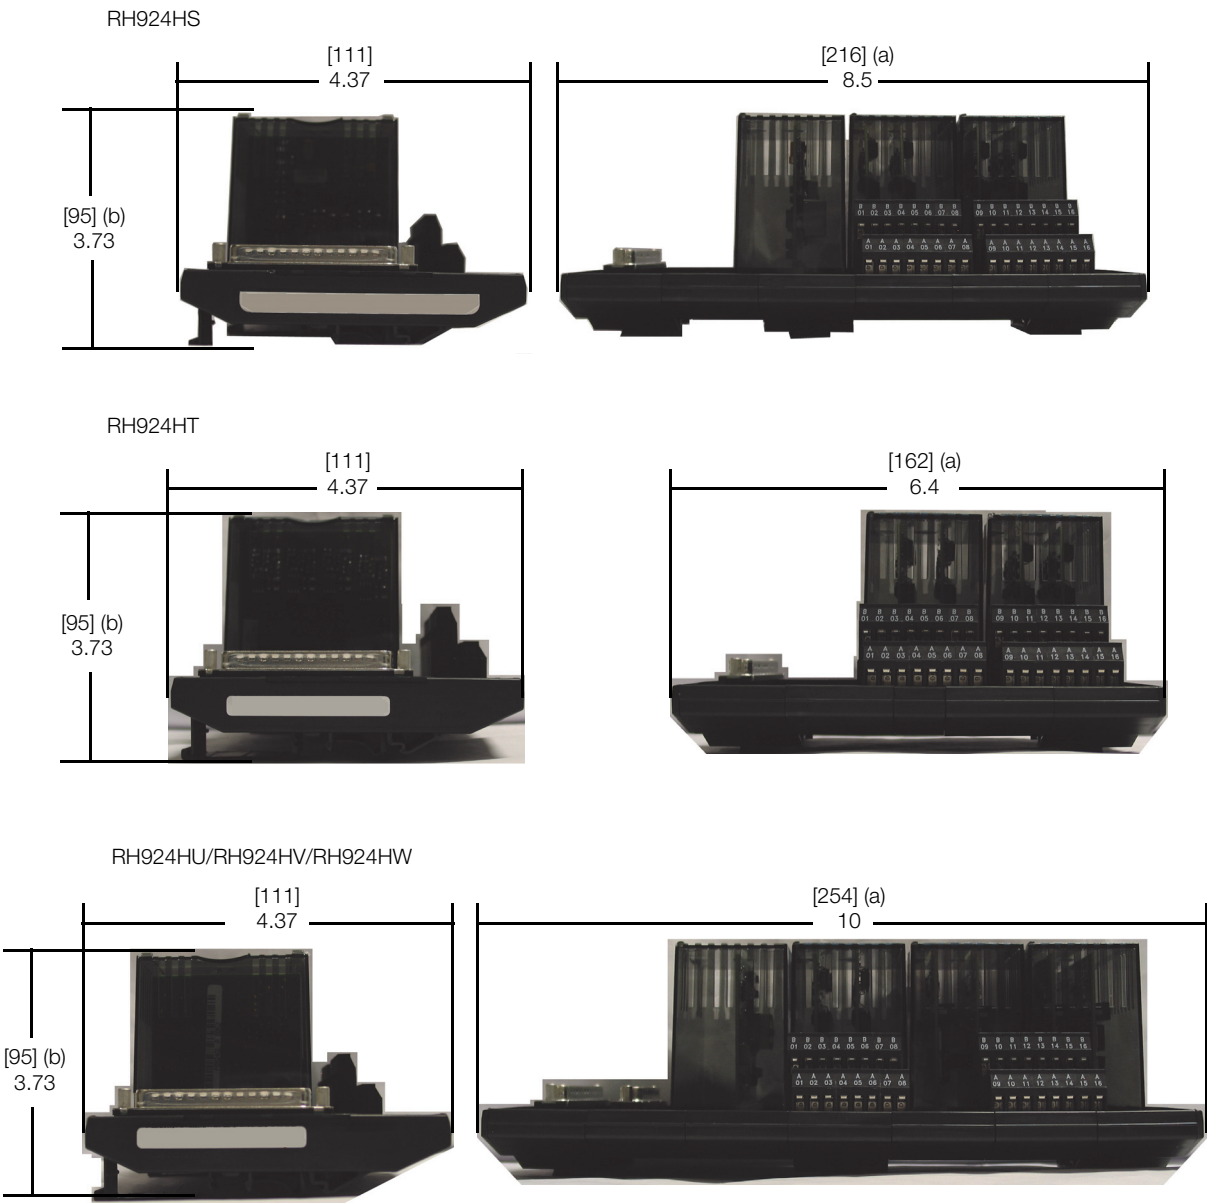


(a) Overall width – for determining DIN rail loading.
(b) Height above DIN rail (add to DIN rail height for total).

DIMENSIONS – NOMINAL (CONTINUED)

[mm]
in

Compression Termination Assemblies

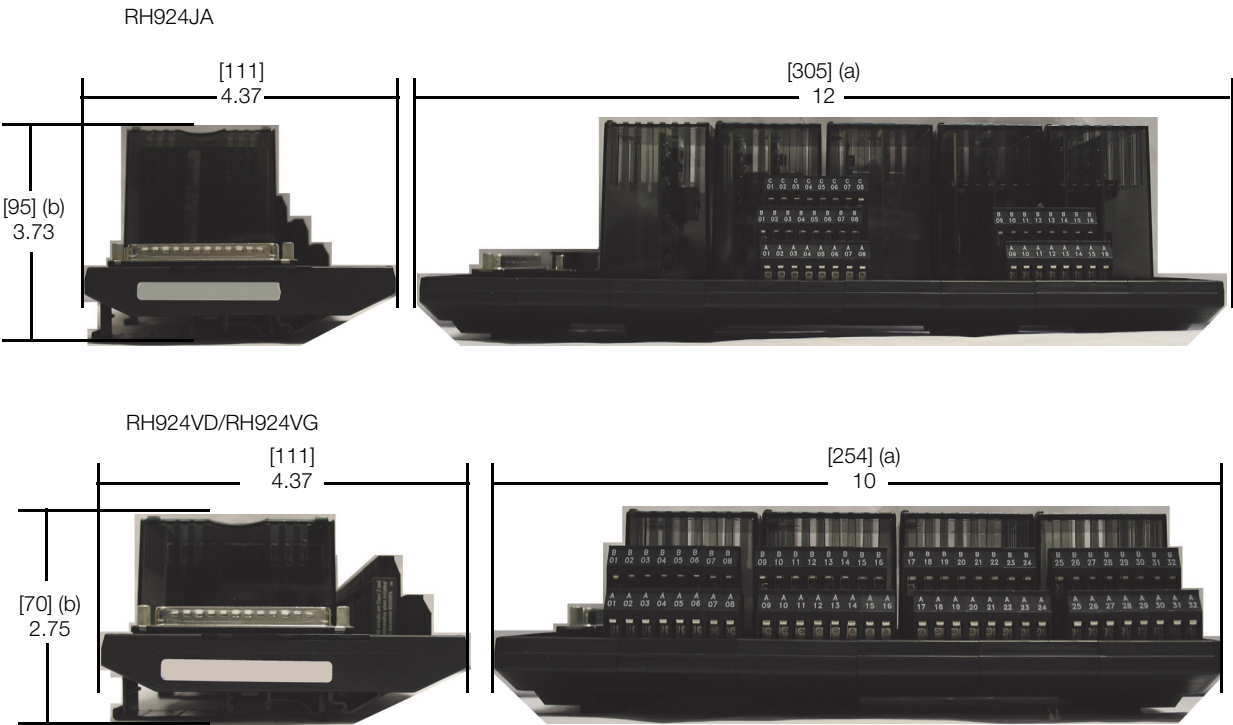

(a) Overall width – for determining DIN rail loading.
(b) Height above DIN rail (add to DIN rail height for total).

RELATED PRODUCT DOCUMENTS

Table 4. Other Related Documents

PSS Number	Description
PSS 31H-2COV	Compact 200 Series I/O Subsystem Overview
B0400FA	Standard and Compact 200 Series Subsystem User's Guide
PSS 31H-2C200	Compact 200 Series 16-Slot Horizontal Baseplate
PSS 31H-2SOV	Standard 200 Series Subsystem Overview
PSS 31H-2CERTS	Standard and Compact 200 Series I/O - Agency Certifications
PSS 31H-2C480 B4	Compact Power Supply - FPS480-24
PSS 31S-3FCPICS	Field Control Processor 280 (FCP280) Integrated Control Software
PSS 21S-3CP270ICS	Control Processor 270 (CP270) Integrated Control Software



Invensys Systems, Inc
10900 Equity Drive
Houston, TX 77041
United States of America
<http://www.invensys.com>

Global Customer Support
Inside U.S.: 1-866-746-6477
Outside U.S.: 1-508-549-2424
Website: <https://support.ips.invensys.com>

Copyright 2015 Invensys Systems, Inc.
All rights reserved.
Invensys is now part of Schneider Electric.

Schneider Electric, Invensys, Foxboro, Foxboro Evo, FoxCom, and I/A Series, are trademarks owned by Schneider Electric SE, its subsidiaries and affiliates. All other trademarks are the property of their respective owners.

MB 031

1115