



## Foxboro™ DCS

### Compact FBM248, Current/Voltage Analog/Digital/ Pulse I/O Configurable Module (Redundant)

#### PSS 41H-2C248

#### Product Specification

July 2020



# Legal Information

The Schneider Electric brand and any trademarks of Schneider Electric SE and its subsidiaries referred to in this guide are the property of Schneider Electric SE or its subsidiaries. All other brands may be trademarks of their respective owners.

This guide and its content are protected under applicable copyright laws and furnished for informational use only. No part of this guide may be reproduced or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), for any purpose, without the prior written permission of Schneider Electric.

Schneider Electric does not grant any right or license for commercial use of the guide or its content, except for a non-exclusive and personal license to consult it on an "as is" basis. Schneider Electric products and equipment should be installed, operated, serviced, and maintained only by qualified personnel.

As standards, specifications, and designs change from time to time, information contained in this guide may be subject to change without notice.

To the extent permitted by applicable law, no responsibility or liability is assumed by Schneider Electric and its subsidiaries for any errors or omissions in the informational content of this material or consequences arising out of or resulting from the use of the information contained herein.

# Features

- 8 redundant individual isolated channels to support:
  - HART Analog Input (AI)/Analog Output (AO) 4-20 mA
  - Analog input signal (4-20 mA) that complies with the NAMUR NE 43 standard signal range
  - 0-20 mA AI/AO, non-HART
  - 0-10 V and 0-5 V AI, non-HART
  - Digital dry contact sense 24 V dc
  - Discrete voltage monitor, configurable 0 and 1 thresholds 0-10 V
  - NAMUR sensor discrete input - Signal level according to DIN EN 50227 (NAMUR):
    - “On” at 2.1 mA dc with short circuit detection at > 6 mA
    - “Off” at 1.2 mA dc with open detection at < 0.25 mA
  - NAMUR dry contact sense 7.5 V dc, nominal/typical
  - Pulse count, frequency, acceleration and jerk, contact sense, or voltage input
  - Discrete Output 24 V, 20 mA current or solid state switch output
- Redundant modules increase loop reliability
- Rugged design suitable for enclosures in Class G3 (harsh) environments
- Executes programs for Discrete Input, Pulse Count, Sequence of Events and Transient Data Recording with support for Sustained and Momentary Digital Outputs
- Enables higher utilization of I/O points in each enclosure - fewer points on each FBM are likely to remain unused due to the versatility of the Compact FBM248's I/O points
- Passive Termination Assemblies (TAs) - DIN rail mounted - for locally or remotely connecting field wiring to the Compact FBM248
- Baseplate-mounted Termination Assembly (TA) attaches directly to a Redundant Adapter on the Compact 200 Series baseplate, which helps eliminate the need for mounting a separate TA on a DIN rail for redundant Compact FBM248s and space for the TA's cable in an enclosure
- Enables sites to reduce the number of separate types of 200 Series FBMs maintained as spares, by replacing them with a single type of 200 Series FBM - the Compact FBM248, which supports a wide range of analog, digital and pulse field I/O applications

# Overview

In many plant situations, the signal types associated with an installation are not well known until late in the project. The Compact FBM248 provides the capability to accept a range of standard analog, discrete, and pulse inputs that are user selectable and changeable at the discretion of the engineer over redundant channels. The HART® input signals are electrically compatible with the standard 4 to 20 mA inputs, and HART output signals are electrically compatible with the standard 20 mA outputs.

The Compact FBM248, Channel-Isolated Current/Voltage Analog/Digital/Pulse I/O Module (Redundant) contains eight redundant channels which can be individually configured for a range of analog, digital and pulse field I/O signals. It is part of the Compact 200 Series I/O subsystem described in *Compact 200 Series I/O Subsystem Overview* (PSS 41H-2COV).

A redundant pair of the modules combine to provide redundancy at the Fieldbus Module (FBM) level, with field I/O wired to one common termination assembly via a Redundant Adapter (RH101LN) as shown in *Redundant Compact FBM248s Attached to a Redundant Adapter*, page 4. In most configurations, each module independently attempts to hold the output(s) at its specified output value(s), and each independently reports its observed value of the inputs.

The Compact FBM248 pair validate each input and output.

## Figure 1 - Redundant Compact FBM248s Attached to a Redundant Adapter

Compact FBM248s in FBM Baseplate



Each I/O channel is galvanically isolated from other channels and ground.

Two types of passive termination assemblies are available for the FBM248:

- DIN rail mounted passive termination assembly (RH924WW), similar to those used with the other Compact 200 Series FBMs
- Baseplate-mounted Termination Assembly (TA) (RH101KA), mounts onto the Redundant Adapter (RH101LN) on the Compact 200 Series baseplate. This TA provides field I/O wiring support for redundant Compact FBM248s as shown in *Redundant Compact FBM248s Attached to a Redundant Adapter and Baseplate-Mounted Termination Assembly*, page 5.



**Figure 2 - Redundant Compact FBM248s Attached to a Redundant Adapter and Baseplate-Mounted Termination Assembly**

Compact FBM248s in FBM Baseplate



The Compact FBM248 can serve as a HART communications field device host, enabling Foxboro™ DCS to request and receive two digital messages per second from the field device. The message pass-through capability can be used to support HART universal, common practice, and device-specific commands, but it cannot support the burst communication mode. These commands are implemented using the Foxboro DCS Field Device Expert for HART or PACTware. For details, see *Field Device Expert for HART Devices Control and I/O* (PSS 41S-10FDMHRT) or *Model PC50 Field Device Tool for Use with Intelligent Field Devices* (PSS 2A-1Z3 G).

The Compact FBM248 must be used with Foxboro DCS Control Core Services software v9.3 or later. Use ICC or Control Software to configure FBM248s. This FBM type is not supported by IACC.

When used with the baseplate-mounted TAs, there is no need for a separate termination or marshalling enclosure. When installed in K-Series or equivalent system enclosures, the redundant Compact FBM248s enable the system enclosure to support up to 192 Compact FBMs and their associated Field Control Processor 280s (FCP280s) from a single enclosure's footprint. See *G-Series Enclosures Overview* (PSS 41H-2GOV), *K-Series Enclosures Overview* (PSS 41H-2KOV), or equivalent PSS for the list of modules supported in the system enclosures.

The Compact FBM248 is electrically compatible with standard HART signals.

## High Accuracy

For high input accuracy, the module incorporates a 16-bit sigma-delta converter that can provide new analog input values for each channel every 100 milliseconds. For outputs, a 13-bit D/A is used.

## High Reliability

The redundancy of the module pair, coupled with the high coverage of detected faults, provides a very high subsystem availability time.

## Compact Design

The Compact FBM248's design is narrower than the standard 200 Series FBMs. It has a rugged Acrylonitrile Butadiene Styrene (ABS) exterior for physical protection of the circuits. Enclosures specially designed for mounting the FBMs provide various levels of environmental protection, up to Class G3 harsh environments per ISA Standard S71.04.

## Visual Indicators

Light-emitting diodes (LEDs) incorporated into the front of the modules provide visual indication of the module operational status, and communication activity of the input/output channels.

Their functionality varies depending on the type of I/O signal used on each channel:

- Red and green LEDs indicate the FBM operational status
- Yellow LEDs indicate HART communication activity for each channel
- Yellow LEDs indicate the On or Off state of the discrete input or output channels' pulse input activity, and indicate the Master/Tracker status of each Compact FBM248 in the pair

## Easy Removal/Replacement

The module mounts on a Compact 200 Series baseplate. Two screws on the FBM fix the module to the baseplate.

The module can be removed/replaced without removing field device termination cabling, power, or communication cabling. See *Intelligent Marshalling Fieldbus Modules - FBM247 and FBM248* (B0700GU) before removing or replacing FBM248 modules.

## Sequence of Events

The Sequence of Events (SOE) software package is used for acquisition, storage, display, and reporting of events associated with discrete input points in a control system. SOE, using the optional GPS based time synchronization capability, supports data acquisition across control processors at intervals of up to one millisecond, depending on the signal source.

See *Sequence of Events* (PSS 31S-2SOE) to learn more about this package, and see *Time Synchronization Equipment* (PSS 41H-4TIMESNC) for a description of the optional time synchronization capability.

## Fieldbus Communication

A Control Processor interfaces to the redundant 2 Mbps module Fieldbus used by the FBMs. The redundant Compact FBM248s accept communication from either path (A or B) of the 2 Mbps Fieldbus. If one path becomes unavailable or is changed at the system level, the module continues communication over the active path.

## Modular Baseplate Mounting

The module mounts on a Compact 200 Series 16-Slot horizontal baseplate, which accommodates up to sixteen 200 Series Compact FBMs. The Compact baseplate is DIN rail mounted, and includes signal connectors for a redundant 2 Mbps HDLC module Fieldbus, redundant independent dc power, and termination cables.

Redundant modules need to be located in adjacent positions on the baseplate (positions 1 and 2, 3 and 4, 5 and 6, or 7 and 8). To achieve the redundancy, a redundant adapter module is placed on the two adjacent baseplate termination cable connectors to provide a single termination cable connection (see [Figure 1, page 4](#)). A single termination cable connects from the redundant adapter to the associated termination assembly (TA).

To system configurator applications and monitoring through SMON and Foxboro DCS System Manager, the redundant pair are displayed as a single module. The functional redundancy is provided by the Compact FBM248 pair, not the control blocks.

## Termination Assemblies

Field I/O signals connect to the FBM subsystem via a DIN rail mounted or baseplate-mounted TA.

The TAs used with the Compact FBM248 are described in *Termination Assemblies and Cables*, page 15.

# Functional Specifications

Supported Hart Instrument Types	HART instruments compliant to Version 5, 6, or 7 of the HART specifications may be used.
Input/Output Channels	<p>Eight I/O channels, each individually configurable as:</p> <ul style="list-style-type: none"> <li>• HART 4-20 mA analog input or analog output</li> <li>• HART or 4-20 mA analog input with NAMUR NE 43 support</li> <li>• (non-HART) 0-20 mA analog input or analog output</li> <li>• (non-HART) 0-10 V and 0-5 V analog input</li> <li>• Digital dry contact sense 24 V dc</li> <li>• NAMUR<sup>(a)</sup> sensor discrete input — Signal level according to DIN EN 50227 (NAMUR) <ul style="list-style-type: none"> <li>◦ “On” at 2.1 mA dc with short circuit detection at &gt; 6 mA</li> <li>◦ “Off” at 1.2 mA dc with open detection at &lt; 0.25 mA</li> </ul> </li> <li>• Digital voltage input, configurable 0 and 1 thresholds 0-10 V</li> <li>• Pulse count, frequency, acceleration or jerk, contact sense or voltage input</li> <li>• Digital output 24 V, 20 mA current or switch</li> </ul> <p>Discrete inputs have configurable current or voltage thresholds when not in SOE mode.</p> <p>Channel types are independently configurable without taking the module or other channels offline.</p> <p>Each channel is isolated and independent.</p> <p><b>NOTE:</b> Redundant pairs (input or output) are connected together by a common field I/O connector and therefore are not isolated from each other.</p>
Input/Output Channels Specifications	See <a href="#">Input/Output Channels Specifications</a> , page 10.
Input/Output Channel Isolation	<p>Each channel is galvanically isolated from all other channels and earth (ground). The module withstands, without damage, a potential of 600 V ac applied for one minute between any channel and ground, or between a given channel and any other channel. See this CAUTION:</p> <div style="border: 1px solid black; padding: 10px; margin-top: 10px;"> <p style="text-align: center;"><b>⚠ CAUTION</b></p> <p>This does not imply that these channels are intended for permanent connection to voltages of these levels. Exceeding the limits for input voltages, as stated elsewhere in this specification, violates electrical safety codes and may expose users to electric shock.</p> <p><b>Failure to follow these instructions can result in injury or equipment damage.</b></p> </div>
Communication	Communicates with its associated Foxboro DCS FCP280 via the redundant 2 Mbps module Fieldbus.

Power Requirements	<ul style="list-style-type: none"> <li>Input Voltage Range (Single or Redundant): 24 V dc +5%, -10%</li> <li>Consumption (Maximum): 10 W total for module in Single mode 16 W total for redundant pair</li> <li>Heat Dissipation (Maximum): 9.5 W total for module in Single mode 15.3 W total for redundant pair</li> </ul>
Calibration Requirements	Calibration of the module and termination assembly is not required.
Regulatory Compliance: Electromagnetic Compatibility (EMC)	<ul style="list-style-type: none"> <li><i>European EMC Directive 2014/30/EU:</i> Meets EN61326:2013 Class A Emissions and Industrial Immunity Levels</li> </ul>
Regulatory Compliance: Product Safety	<ul style="list-style-type: none"> <li><i>Underwriters Laboratories (UL) for U.S. and Canada:</i> Module can be used in UL/UL-C listed Division 2 enclosure based systems. The FBMs are UL listed as Class I, Division 2, Groups A-D and G; Division 2 hazardous locations when connected to field devices and wiring meeting entity parameter constraints specified in the <i>Standard and Compact 200 Series Subsystem User's Guide</i> (B0400FA). I/O circuits also meet the requirements for Class 2 as defined in Article 725 of the National Electrical Code (NFPA) and Section 16 of the Canadian Electrical Code (CSA C22.1). Class 2 compliance applies only when field circuits are module powered.  The UL/UL-C listing requires that the 24 V dc power source for the module is from a Foxboro power supply that is UL/UL-C recognized (to UL 60950) as having a Safety Extra Low Voltage (SELV) output.</li> <li><i>European Low Voltage Directive 2014/35/EU and Explosive Atmospheres (ATEX) directive 2014/34/EU:</i> Module can be used in certified Zone 2 enclosure based systems. The modules (Without Safety Barriers) are DEMKO certified as "Ex nA IIC T4 Gc", for use in Zone 2, Group IIC, potentially explosive atmospheres when connected to field devices and wiring meeting entity parameter constraints described in the <i>Standard and Compact 200 Series Subsystem User's Guide</i> (B0400FA).</li> </ul>
RoHS Compliance	Complies with European RoHS Directive 2011/65/EU, including amending Directives 2015/863 and 2017/2102.
Calibration Requirements	Calibration of the module and termination assembly is not required.
(a) For intrinsically safe installations, an external barrier is required.	

## Input/Output Channels Specifications

Input Ranges	<ul style="list-style-type: none"> <li>Voltage: -0.25 to 10 V dc or -0.12 to 5 V dc (0.0 V = 1,600 raw counts)</li> <li>Current: 0 to 20 mA dc</li> <li>Pulse Count: 0 to 65,535 with rollover to zero</li> <li>Frequency: 10 Hz to 25,000 Hz</li> </ul>
Input Over-Range Capability	<ul style="list-style-type: none"> <li>Voltage: 10.2 V dc or 5.1 V dc (65,248 counts) 30 V without damage</li> <li>Current: 20.4 mA dc (65,280 counts) 36 mA without damage</li> </ul>
Digital SOE or Pulse on Level	<ul style="list-style-type: none"> <li>Voltage: 6 V dc min, 30 V dc max</li> <li>Current: 2.1 mA dc min, 10 mA dc max. NAMUR compatible</li> </ul>
Digital SOE or Pulse Off Level	<ul style="list-style-type: none"> <li>Voltage: 0 V dc min, 1.8 V dc max</li> <li>Current: 0 mA dc min, 1.2 mA dc max. NAMUR compatible</li> </ul>
Minimum Pulse On Time	16 microseconds
Minimum Pulse Off Time	16 microseconds
Minimum Pulse Period	40 microseconds
Input Accuracy	<ul style="list-style-type: none"> <li>Analog Input: 0.075% of span</li> <li>Temperature Coefficient: 50 PPM/Deg C</li> <li>Pulse Rate: 0.05% of reading</li> </ul>
Analog Input Resolution	16 bits
Pulse Count Resolution	<ul style="list-style-type: none"> <li>Pulse Count: 16 bits (integer)</li> <li>Frequency: 32 bits (integer)</li> </ul>

Input Update Rate	<ul style="list-style-type: none"> <li>• Analog: 25 milliseconds, unsettled raw samples are available at an update rate of 10 msec as inputs to the Foxboro Transient Data Recorder (TDR)</li> <li>• Pulse Count and Frequency: 10 or 25 milliseconds depending upon integration time setting</li> <li>• Digital SOE Update Rate: 1 millisecond</li> </ul>
Analog and Pulse Input Integration Time	100, 200, 500, and 1,000 milliseconds, software configurable on a per FBM basis
Fastest Allowed ECB Block Period	100 msec
Input Signal A/D Conversion	Each channel performs A/D signal conversion using an independent sigma-delta converter.
Input Channel Impedance	<ul style="list-style-type: none"> <li>• Voltage Input: 300 k<math>\Omega</math> nominal</li> <li>• Current Input: <ul style="list-style-type: none"> <li>◦ With External Loop Supply: 300 <math>\Omega</math> nominal</li> <li>◦ With Internal Loop Supply: 250 <math>\Omega</math> nominal</li> </ul> </li> </ul>
Input Current Limit	32 mA nominal
Maximum Output Current	20.4 mA
Maximum Output Load in Output Mode when FBM Provides Power	750 $\Omega$ when using FBM power
Analog Output Accuracy	0.075% of span (0.1 to 20 mA) Temperature Coefficient: 50 PPM/Deg C
Analog Output Resolution	13 bits
Analog Output Non-Linearity	Non-linearity is included in the accuracy specification.
Analog Output Processing Delay	30 milliseconds maximum
Field Device Cabling Distance	For current I/O Channels, maximum distance of the field device from the FBM is a function of compliance voltage (19 V dc @ 20.4 mA input), wire gauge, and voltage required at the field device.
Loop Power Supply Protection	<p>Loop power is channel-to-channel galvanically isolated and current limited.</p> <p><b>NOTE:</b> For an external loop power supply used with a Compact FBM248, either a separate power supply or one in the instrument, verify that the maximum voltage does not exceed 24.0 Volts.</p>
HART Protocol Compatibility	The channels meet the impedance requirements for a HART high Impedance Device and can be used in a HART loop without interfering with the HART signals between the field device and a Hand-Held Communicator (HHC).



## Environmental Specifications

	Operating Conditions	Storage Conditions
<b>Temperature</b>	<ul style="list-style-type: none"> <li>Module: -20 to +60°C (-4 to +140°F)</li> <li>Termination Assembly - PA: <ul style="list-style-type: none"> <li>Polyamide (PA): -20 to +70°C (-4 to +158°F)</li> <li>Polycarbonate/Acrylonitrile Butadiene Styrene (PC/ABS): -20 to +70°C (-4 to +158°F)</li> </ul> </li> </ul>	-40 to +70°C (-40 to +158°F)
<b>Relative Humidity</b>	5 to 95% (noncondensing)	5 to 95% (noncondensing)
<b>Altitude</b>	-300 to +3,000 m (-1,000 to +10,000 ft)	-300 to +12,000 m (-1,000 to +40,000 ft)
<b>Contamination</b>	Suitable for use in Class G3 (Harsh) environments as defined in ISA Standard S71.04, based on exposure testing according to EIA Standard 364-65, Class III.	
<b>Vibration</b>	7.5 m/s <sup>2</sup> (5 to 500 Hz)	

## Physical Specifications

Mounting	<ul style="list-style-type: none"> <li>Module: The Compact FBM248 mounts on a Compact 200 Series 16-slot horizontal baseplate. The baseplate can be mounted on a horizontal DIN rail, or horizontally on a 19-inch rack using a mounting kit. <i>See Compact 200 Series 16-Slot Horizontal Baseplate (PSS 41H-2C200) for details.</i></li> <li>Termination Assembly: The DIN rail mounted TA (RH924WW) mounts on a DIN rail and accommodates multiple DIN rail styles including 32 mm (1.26 in) and 35 mm (1.38 in). It connects to the redundant adapter associated with the Compact FBM248s.  The baseplate-mounted TA (RH101KA) mounts on the redundant adapter associated with the Compact FBM248s on a Compact 200 Series baseplate.</li> </ul>
Weight	<ul style="list-style-type: none"> <li>Module 373 g (12 oz) approximate</li> <li>Termination Assembly <ul style="list-style-type: none"> <li>DIN Rail Mounted TA 170 g (0.37 lb, approximate)</li> <li>Baseplate Mounted TA 100 g (0.22 lb, approximate)</li> </ul> </li> </ul>
Dimensions: Module	<ul style="list-style-type: none"> <li>Height: 130 mm (5.12 in)</li> <li>Width: 25 mm (0.98 in)</li> <li>Depth: 139 mm (5.46 in) 150 mm (5.9 in), including baseplate connectors</li> </ul>
Dimensions: Termination Assemblies	See <a href="#">Dimensions - Nominal</a> , page 18.
Part Numbers	<ul style="list-style-type: none"> <li>Compact FBM248 Module: RH101LJ</li> <li>Termination Assemblies: See <a href="#">Functional Specifications - Termination Assemblies</a>, page 16</li> <li>Redundant Adapter: RH101LN</li> </ul>

Termination Cables	<ul style="list-style-type: none"> <li>• Cable Lengths: Up to 30 m (98 ft)</li> <li>• Cable Materials: Polyurethane or Low Smoke Zero Halogen (LSZH)</li> <li>• Termination Cable Type: Type 1, see Table 2, page 17</li> <li>• Cable Connection — TA to Baseplate: <ul style="list-style-type: none"> <li>◦ FBM Baseplate End: 37-pin D-subminiature</li> <li>◦ Termination Assembly End: 25-pin D-subminiature</li> </ul> </li> </ul>
Field Termination Connections	<p>DIN Rail TA Compression-Type Accepted Wiring Sizes:</p> <ul style="list-style-type: none"> <li>• Solid/Stranded/AWG: 0.2 to 4 mm<sup>2</sup>/0.2 to 2.5 mm<sup>2</sup>/24 to 12 AWG</li> <li>• Stranded with Ferrules: 0.2 to 2.5 mm<sup>2</sup> with or without plastic collar</li> </ul> <p>Baseplate Mounted TA Compression-Accepted Wiring Sizes:</p> <ul style="list-style-type: none"> <li>• Solid/Stranded/AWG: 0.2 to 1.5 mm<sup>2</sup>/0.2 to 1.5 mm<sup>2</sup>/24 to 16 AWG</li> <li>• Stranded with Ferrules: 0.25 to 0.75 mm<sup>2</sup> with plastic collar 0.25 to 1.5 mm<sup>2</sup> without plastic collar</li> </ul>

# Termination Assemblies and Cables

Field I/O signals connect to the FBM subsystem via DIN rail mounted termination assemblies (TAs).

For redundant Compact FBM248 configurations, a redundant adapter (RH101LN) is needed for connection between the FBM baseplate and the termination cable.

The DIN rail mounted TAs for the Compact FBM248 are available in Polyamide (PA) material with compression screw terminations.

See *Functional Specifications - Termination Assemblies*, page 16 for the TAs used with the Compact FBM248.

The Compact FBM248 provides sufficient loop resistance to allow use of the HART Hand-Held Terminal or *PC20 Intelligent Field Device Configurator* (PSS 2A-1Z3 E).

A removable termination cable connects the DIN rail mounted TA to the FBM via a field connector on the baseplate in which the FBM is installed. Termination cables are available in these materials:

- Polyurethane
- Low Smoke Zero Halogen (LSZH)

Termination cables are available in a variety of lengths, up to 30 meters (98 feet), allowing the Termination Assembly to be mounted in either the enclosure or in an adjacent enclosure.

See *Table 2*, page 17 for a list of termination cables used with the DIN rail mounted TAs for the Compact FBM248.

## Functional Specifications - Termination Assemblies

FBM Type	Input/Output Signal	TA Part Number		Termination Type <sup>(c)</sup>	TA Cable Type <sup>(d)</sup>	TA Cert. Type <sup>(e)</sup>
		PA <sup>(a)</sup>	PC/ABS <sup>(b)</sup>			
Compact FBM248	8 configurable I/O channels, voltage or current, analog or digital.  Analog 4 to 20 mA I/O may also have the HART signal superimposed.	RH924WW		C	1	1, 2
Compact FBM248	8 configurable I/O channels, voltage or current, analog or digital.  Analog 4 to 20 mA I/O may also have the HART signal superimposed.		RH101KA	Spring Cage (SC) (Baseplate mounted)	n/a	1, 2
<p>(a) PA is polyamide rated from -20 to +70°C (-4 to +158°F).</p> <p>(b) PC/ABS is Polycarbonate/Acrylonitrile Butadiene Styrene (PC/ABS) rated from -20 to +70°C (-4 to +158°F).</p> <p>(c) C = TA with compression terminals.</p> <p>(d) See Table 2, page 17 for cable part numbers and specifications.</p> <p>(e) See Table 1, page 17 for TA certification definitions.</p>						

**Table 1 - Certifications for Termination Assemblies**

Type	Certification <sup>(a)</sup>
Type 1	TAs are UL/UL-C listed as suitable for use in Class I; Groups A-D; Division 2 temperature code T4 hazardous locations. They are DEMKO certified Ex nA IIC T4 Gc for use in Zone 2 potentially explosive atmospheres.
Type 2	TAs are UL/UL-C listed for supplying field circuits Class I; Groups A-D; Division 2 hazardous locations when connected to specified 200 Series FBMs and field circuits meeting entity parameter constraints specified in <i>Standard and Compact 200 Series Subsystem User's Guide</i> (B0400FA). They are also DEMKO certified for supplying field circuits for Group IIC, Zone 2 potentially explosive atmospheres. Field circuits are also Class 2 limited energy (60 V dc, 30 V ac, 100 VA or less) if customer-supplied equipment meets Class 2 limits.
(a) All TAs are UL/UL-C listed to comply with applicable ordinary location safety standards for fire and shock hazards. Hazardous location types comply with ATEX directive for II 3 G use. They also comply with the requirements of the European Low Voltage Directive. All listings/certifications require installation and use within the constraints specified in <i>Standard and Compact 200 Series Subsystem User's Guide</i> (B0400FA) and the conditions stated in UL and DEMKO reports.	

**Table 2 - Cable Types and Part Numbers**

Cable Length m (ft)	Type 1 P/PVC <sup>(a)</sup>	Type 1 LSZH <sup>(b)</sup>
0.5 (1.6)	RH100BY	RH100BC
1.0 (3.2)	RH100BZ	RH100BD
1.4 (4.9)	RH100EP	RH100EL
2.0 (6.6)	RH100CA	RH100BE
3.0 (9.8)	RH100CB	RH100BF
5.0 (16.4)	RH100CC	RH100BG
10.0 (32.8)	RH100CD	RH100BH
15.0 (49.2)	RH100CE	RH100BJ
20.0 (65.6)	RH100CF	RH100BK
25.0 (82.0)	RH100CG	RH100BL
30.0 (98.4)	RH100CH	RH100BM
(a) P/PVC is polyurethane outer jacket and semi-rigid PVC primary conductor insulation. Temperature range: -20 to +70°C (-4 to +158°F).		
(b) Low smoke zero halogen or low smoke free of halogen (LSZH) is a material classification used for cable jacketing. LSZH is composed of thermoplastic or thermoset compounds that emit limited smoke and no halogen when exposed to high sources of heat. Temperature range: -40 to +105°C (-40 to +221°F).		

# Dimensions - Nominal

Figure 3 - DIN-Rail-Mounted Termination Assembly (RH924WW)


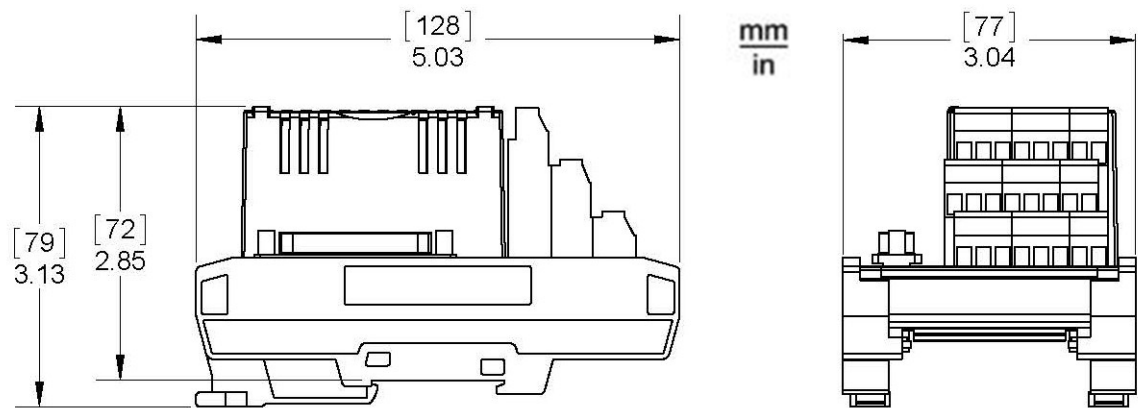



Figure 4 - Baseplate-Mounted Termination Assembly (RH101KA)



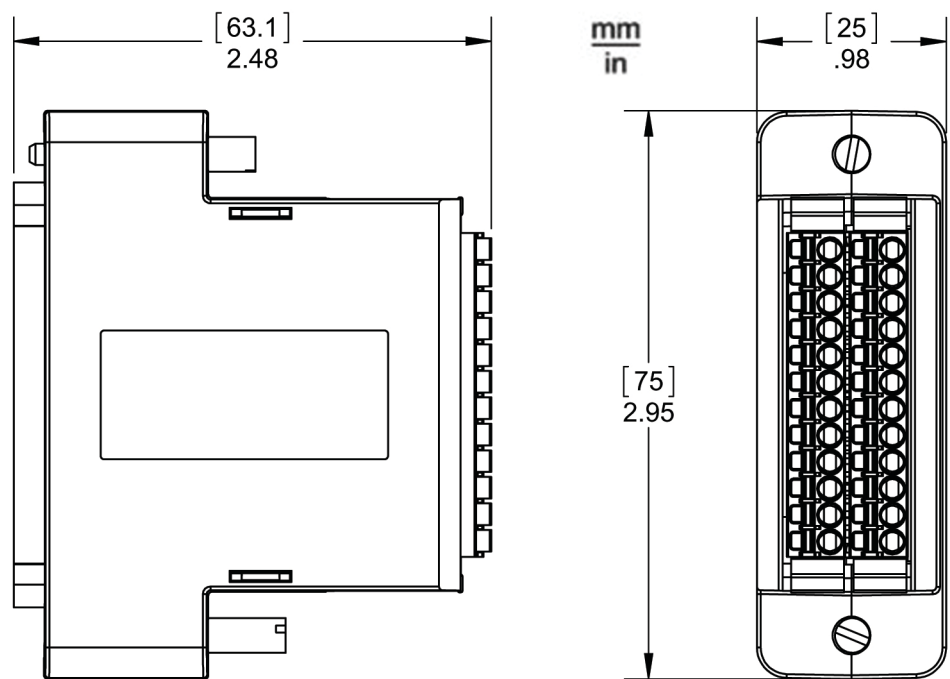

## Related Documents

Document Number	Description
PSS 41H-2SOV	<i>Standard 200 Series Subsystem Overview</i>
PSS 41H-2CERTS	<i>Standard and Compact 200 Series I/O - Agency Certifications</i>
PSS 41H-2SBASPLT	<i>Standard 200 Series Baseplates</i>
PSS 41H-2GOV	<i>G-Series Enclosures Overview</i>
PSS 41H-2KOV	<i>K-Series Enclosures Overview</i>
PSS 41H-4TIMESNC	<i>Time Synchronization Equipment</i>
PSS 31S-2SOE	<i>Sequence of Events</i>
PSS 31S-2TDRA	<i>Transient Data Recorder and Analyzer</i>
PSS 41S-10FDMHRT	<i>Field Device Expert for HART Devices Control and I/O</i>
PSS 41S-3FCPICS	<i>Field Control Processor 280 (FCP280) Integrated Control Software</i>
PSS 2A-1Z3 G	<i>Model PC50 Field Device Tool for Use with Intelligent Field Devices</i>
B0400FA	<i>Standard and Compact 200 Series Subsystem User's Guide</i>

 **WARNING:** This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.p65warnings.ca.gov/](http://www.p65warnings.ca.gov/).

Schneider Electric Systems USA, Inc.  
38 Neponset Avenue  
Foxboro, Massachusetts 02035–2037  
United States of America

Global Customer Support: <https://pasupport.schneider-electric.com>

As standards, specifications, and design change from time to time, please ask for confirmation of the information given in this publication.

© 2016–2020 Schneider Electric. All rights reserved.

PSS 41H-2C248, Rev B