

Foxboro™ DCS

FBM201/b/c/d Analog Input (0 to 20 mA, 0 to 100 mV,
0 to 5 V, 0 to 10 V dc)

PSS 41H-2S201

Product Specification

August 2019



Legal Information

The Schneider Electric brand and any trademarks of Schneider Electric SE and its subsidiaries referred to in this guide are the property of Schneider Electric SE or its subsidiaries. All other brands may be trademarks of their respective owners.

This guide and its content are protected under applicable copyright laws and furnished for informational use only. No part of this guide may be reproduced or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), for any purpose, without the prior written permission of Schneider Electric.

Schneider Electric does not grant any right or license for commercial use of the guide or its content, except for a non-exclusive and personal license to consult it on an "as is" basis. Schneider Electric products and equipment should be installed, operated, serviced, and maintained only by qualified personnel.

As standards, specifications, and designs change from time to time, information contained in this guide may be subject to change without notice.

To the extent permitted by applicable law, no responsibility or liability is assumed by Schneider Electric and its subsidiaries for any errors or omissions in the informational content of this material or consequences arising out of or resulting from the use of the information contained herein.

Overview

Each FBM201/b/c/d Analog Input Module contains eight analog input channels, each channel accepting a 2-wire, dc input from an analog sensor such as a 4 to 20 mA or 0 to 5 V transmitter, or a self-powered 20 mA source.

The modules perform the signal conversion required to interface the electrical input signals from the field sensors to the optionally redundant fieldbus.

The FBM201 is electrically compatible with standard HART signals.

Features

- 8 channels for input of analog sensor signals:
 - 0 to 20 mA dc – FBM201
 - 0 to 100 mV dc – FBM201b
 - 0 to 5 V dc – FBM201c
 - 0 to 10 V dc – FBM201d
- Each analog input channel is galvanically isolated from other channels and ground
- Rugged design suitable for enclosure in Class G3 (harsh) environments
- Execution of an analog input application program that provides conversion time and configurable options for integration time and Rate of Change Limits
- High accuracy achieved by sigma-delta data conversions for each channel
- Termination Assemblies (TAs) for locally or remotely connecting field wiring to the FBM201/b/c/d modules
- TAs for per channel internally and/or externally loop powered transmitters

Standard Design

The FBM201/b/c/d modules have a rugged extruded aluminum exterior for physical protection of the circuits. Enclosures specially designed for mounting the fieldbus modules (FBMs) provide various levels of environmental protection, up to harsh environments of Class G3 as defined in ISA Standard S71.04.

High Accuracy

For high accuracy, the modules incorporate sigma-delta data conversion on a per-channel basis, which can provide a new analog input reading every 25 ms, and a configurable integration period to remove any process and/or electromagnetic noise.

Each time period, the FBM converts each analog input to a digital value, averages these values over the time period, and provides the averaged value to the controller.

Easy Removal/Replacement

The modules can be removed/replaced without removing field device termination cabling, power, or communications cabling.

Visual Indicators

Light-emitting diodes (LEDs) incorporated into the front of the modules provide visual status indications of Fieldbus Module functions.

Modular Baseplate Mounting


The modules mount on a modular baseplate (see *Figure 1, page 5*), which accommodates up to four or eight FBMs. The modular baseplate is either DIN rail mounted or rack mounted, and includes signal connectors for redundant fieldbus, redundant independent dc power, and termination cables.

Fieldbus Communication

A Fieldbus Communication Module or a Control Processor interfaces the redundant 2 Mbps module Fieldbus used by the FBMs. The FBM201/b/c/d modules accept communication from either path (A or B) of the redundant 2 Mbps fieldbus. If one path is unsuccessful or is switched at the system level, the module continues communication over the active path.

Termination Assemblies

Field I/O signals connect to the FBM subsystem via DIN rail mounted TAs. The TAs used with the FBM201/b/c/d modules are described in *Termination Assemblies and Cables, page 11*.

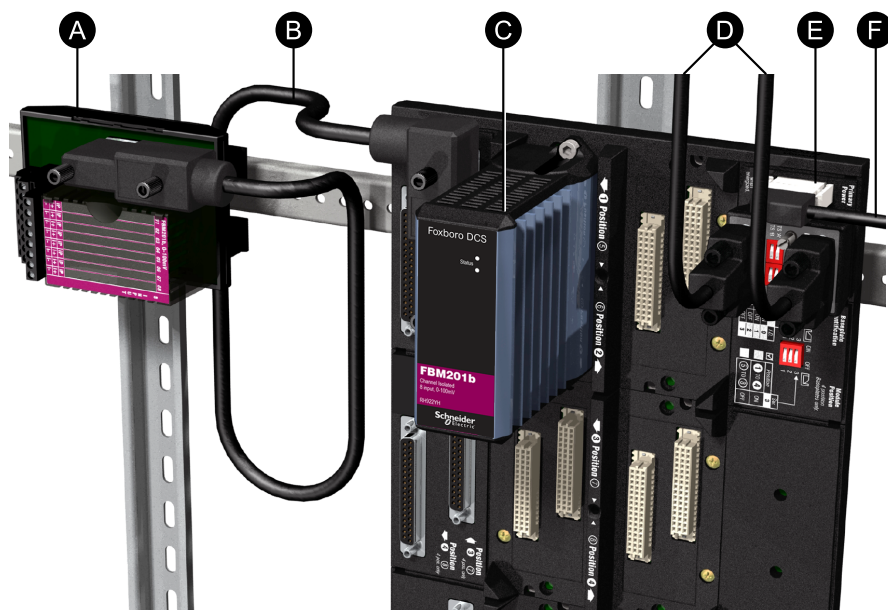Figure 1 - FBM201 Subsystem – Typical

Legend	
A	Termination Assembly
B	Termination Cable
C	FBM201 RH914SQ
D	Fieldbus Cables
E	FBM Baseplate
F	Power Cable

Functional Specifications

Process I/O Communications	Communicates with its associated FCM or FCP via the redundant 2 Mbps module Fieldbus
Input Channels	8 isolated and independent channels
Input Range (each channel)	FBM201: 0 to 20 mA dc FBM201b: 0 to 100 mV dc FBM201c: 0 to 5 V dc FBM201d: 0 to 10 V dc
Input Channels (8)	<ul style="list-style-type: none"> • Analog Accuracy (includes linearity): $\pm 0.03\%$ of span Accuracy temperature coefficient: ± 50 ppm/$^{\circ}\text{C}$ • Field Device Cabling Distance: Maximum distance of the field device from the FBM is a function of compliance voltage (22.8 V dc), wire resistance, and voltage drop at the field device. • Input Channel Impedance: FBM201: 61.5 Ω nominal FBM201b: 10 MΩ FBM201c: 10 MΩ FBM201d: 10 MΩ • Input Signal A/D Conversion: Each channel performs A/D signal conversion using an independent Sigma-Delta converter. • Integration Period: Software configurable • Common Mode Rejection: >100 db at 50 or 60 Hz • Normal Mode Rejection: >95 db at 50 or 60 Hz • Loop Power Supply Protection Each channel is channel-to-channel galvanically isolated, current limited, and voltage regulated. All analog inputs are limited by their design to less than 30 mA. If the current limit circuit shorted out, the current is limited to about 100 mA. • Input Channel Isolation Each channel is galvanically isolated from all other channels and earth (ground). The module/TA withstands, without damage, a potential of 600 V ac applied for one minute between any channel and ground, or between a given channel and any other channel. <div style="background-color: black; color: white; text-align: center; padding: 5px;"> ⚠ DANGER </div> <div style="border: 1px solid black; padding: 5px;"> HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH This does not imply that these channels are intended for permanent connection to voltages of these levels. Exceeding the limits for input voltages, as stated elsewhere in this specification, violates electrical safety codes and may expose users to electric shock. Failure to follow these instructions will result in death or serious injury. </div>

Power Requirements	<ul style="list-style-type: none"> Input Voltage Range (Redundant): 24 V dc +5%, -10% Consumption: 7 W Heat Dissipation: 3 W (maximum)
Calibration Requirements	Calibration of the module and termination assembly is not required.
Regulatory Compliance: Electromagnetic Compatibility (EMC)	<ul style="list-style-type: none"> <i>European EMC Directive 2004/108/EC (Prior to April 20, 2016) and 2014/30/EU (Beginning April 20, 2016):</i> Meets: EN61326-1:2013 Class A Emissions and Industrial Immunity Levels
Regulatory Compliance: Product Safety	<ul style="list-style-type: none"> <i>Underwriters Laboratories (UL) for U.S. and Canada:</i> UL/UL-C listed as suitable for use in UL/UL-C listed Class I, Groups A-D; Division 2; temperature code T4 enclosure based systems when connected to specified Foxboro DCS processor modules. Communications circuits also meet the requirements for Class 2 as defined in Article 725 of the National Electrical Code (NFPA No.70) and Section 16 of the Canadian Electrical Code (CSA C22.1). For more information, see <i>Standard and Compact 200 Series Subsystem User's Guide</i> (B0400FA). <i>European Low Voltage Directive 2006/95/EC (Prior to April 20, 2016) and 2014/35/EU (Beginning April 20, 2016) and Explosive Atmospheres (ATEX) directive 94/9/EC (Prior to April 20, 2016) and 2014/34/EU (Beginning April 20, 2016):</i> DEMKO certified as Ex nA IIC T4 for use in certified Zone 2 enclosure when connected to specified processor modules as described in the <i>Standard and Compact 200 Series Subsystem User's Guide</i> (B0400FA).
RoHS Compliance	Complies with European RoHS Directive 2011/65/EU, including amending Directives 2015/863 and 2017/2102.
Marine Certification	ABS Type Approved and Bureau Veritas Marine certified for Environmental Category EC31.

Environmental Specifications

	Operating	Storage
Temperature	<ul style="list-style-type: none">• FBM201/b/c/d: -20 to +70°C (-4 to +158°F)• Termination Assembly – PA: -20 to +70°C (-4 to +158°F)	-40° to +70°C (-40° to 158°F)
Relative Humidity	5 to 95% (noncondensing)	
Altitude	-300 to +3,000 m (-1,000 to +10,000 ft)	-300 to +12,000 m (-1,000 to +40,000 ft)
Contamination	Suitable for use in Class G3 (Harsh) environments as defined in ISA Standard S71.04, based on exposure testing according to EIA Standard 364-65, Class III.	
Vibration	7.5 m/s ² (0.75 g) from 5 to 500 Hz	

NOTE: The environmental limits of this module may be enhanced by the type of enclosure containing the module. Refer to the applicable Product Specification Sheet (PSS) that describes the type of enclosure to be used.

Physical Specifications

Mounting	<ul style="list-style-type: none"> FBM201/b/c/d: The modules mount on a modular baseplate. The baseplate can be mounted on a DIN rail (horizontally or vertically), or horizontally on a 19-inch rack using a mounting kit. Alternatively, the modules mount on a 100 Series conversion mounting structure. See <i>Standard 200 Series Baseplates</i> (PSS 41H-2SBASPLT) or <i>100 Series Conversion Mounting Structures</i> (PSS 41H-2W8) for details. Termination Assembly: The TA mounts on a DIN rail and accommodates multiple DIN rail styles including 32 mm (1.26 in) and 35 mm 1.38 in).
Weight	<ul style="list-style-type: none"> FBM201/b/c/d: 284 g (10 oz) approximate Termination Assembly: <ul style="list-style-type: none"> Compression: 181 g (0.40 lb) approximate Ring Lug: 249 g (0.55 lb) approximate
Dimensions	<ul style="list-style-type: none"> FBM201/b/c/d: <ul style="list-style-type: none"> Height: 102 mm (4 in) 114 mm (4.5 in) with mounting lugs Width: 45 mm (1.75 in) Depth: 104 mm (4.11 in) Termination Assembly: See <i>Dimensions - Nominal</i>, page 15.
Part Numbers	<ul style="list-style-type: none"> FBM201: RH914SQ FBM201b: RH922YH FBM201c: RH922YJ FBM201d: RH922YK Termination Assemblies: See <i>Functional Specifications - Termination Assemblies</i>, page 12.

Termination Cables	<ul style="list-style-type: none"> • Cable Lengths: Up to 30 m (98 ft) • Cable Materials: Polyurethane or Low Smoke Zero Halogen (LSZH) • Termination Cable Type: Type 1 – See <i>Table 2, page 13</i> • Baseplate to Main TA Cable Connection: <ul style="list-style-type: none"> ◦ FBM Baseplate End: 37-pin D-subminiature ◦ Termination Assembly End: 25-pin D-subminiature
Construction – Termination Assembly	<ul style="list-style-type: none"> • Material: <ul style="list-style-type: none"> ◦ Polyamide (PA), compression ◦ PA, ring lug
Field Termination Connections	<ul style="list-style-type: none"> • Compression-Type Accepted Wiring Sizes: <ul style="list-style-type: none"> ◦ Solid/Stranded/AWG: 0.2 to 4 mm² /0.2 to 2.5 mm² /24 to 12 AWG ◦ Stranded with Ferrules: 0.2 to 2.5 mm² with or without plastic collar • Ring-Lug Type Accepted Wiring Sizes: <ul style="list-style-type: none"> ◦ #6 size connectors (0.375 in (9.5 mm)) ◦ 0.5 to 4 mm² /22 AWG to 12 AWG

Termination Assemblies and Cables

Field input signals connect to the FBM subsystem via DIN rail mounted Termination Assemblies, which are electrically passive (see *Figure 1, page 5*). TAs for the FBM201/b/c/d modules are available in the following forms:

- Compression screw type using Polyamide (PA) material
- Ring lug type using Polyamide (PA) material

See *Functional Specifications - Termination Assemblies, page 12* for a list of TAs used with the FBM201/b/c/d modules.

A removable termination cable connects the DIN rail mounted TA to the FBM via a field connector on the baseplate in which the FBM is installed. Termination cables are available in the following materials:

- Polyurethane
- Low Smoke Zero Halogen (LSZH)

Termination cables are available in a variety of lengths, up to 30 meters (98 feet), allowing the Termination Assembly to be mounted in either the enclosure or in an adjacent enclosure. See *Table 2, page 13* for a list of termination cables used with the TAs for the FBM201/b/c/d modules.

Functional Specifications - Termination Assemblies

FBM Type	Input Signal	TA Part Number	Termination Type ^(b)	TA Cable Type ^(c)	TA Cert. Type ^(d)
		PA ^(a)			
FBM201	8 channels, 0 to 20 mA dc, passive feedthrough with FBM201 channel isolation	RH916XG ^(e)	C	1	1, 2
		P0917JK ^(e)	RL		
FBM201b	8 channels, 0 to 100 mV dc, passive feedthrough with FBM201b channel isolation	RH922ZM	C	1	1, 2
FBM201c	8 channels, 0 to 5 V dc, passive feedthrough with FBM201c channel isolation	RH922ZN	C	1	1, 2
FBM201d	8 channels, 0 to 10 V dc, passive feedthrough with FBM201d channel isolation	RH922ZP	C	1	1, 2
		P0926SQ	RL		

(a) PA is polyamide rated from -20 to +70°C (-4 to +158°F).

(b) C = TA with compression terminals; RL = TA with ring lug terminals.

(c) See *Table 2, page 13* for cable part numbers and specifications.

(d) See *Table 1, page 13* for termination assembly certification definitions.

(e) Polyamide RL supersedes the PVC RL. This is not a RoHS part.

Table 1 - Certification for Termination Assemblies

Type	Certification ^(a)
Type 1	TAs are UL/UL-C listed as suitable for use in Class I; Groups A-D; Division 2 temperature code T4 hazardous locations. They are DEMKO certified EEx nA [nL] IIC T4 for use in Zone 2 potentially explosive atmospheres.
Type 2	TAs are UL/UL-C listed as associated apparatus for supplying non-incendive field circuits Class I; Groups A-D; Division 2 hazardous locations when connected to specified 200 Series FBMs and field circuits meeting entity parameter constraints specified in the <i>Standard and Compact 200 Series Subsystem User's Guide</i> (B0400FA). They are also DEMKO certified as associated apparatus for supplying field circuits for Group IIC, Zone 2 potentially explosive atmospheres. Field circuits are also Class 2 limited energy (60 V dc, 30 V ac, 100 VA or less) if customer-supplied equipment meets Class 2 limits.
^(a) All TAs are UL/UL-C listed to comply with applicable ordinary location safety standards for fire and shock hazards. Hazardous location types comply with ATEX directive for II 3 G use. They also comply with the requirements of the European Low Voltage Directive. All listings/certifications require installation and use within the constraints specified in <i>Standard and Compact 200 Series Subsystem User's Guide</i> (B0400FA) and the conditions stated in UL and DEMKO reports.	

Table 2 - Cable Types and Part Numbers


Cable Length m (ft)	Type 1 P/PVC ^(a)	Type 1 LSZH ^(b)
0.5 (1.6)	RH916DA	RH928AA
1.0 (3.2)	RH916DB	RH928AB
2.0 (6.6)	RH931RM	RH928AC
3.0 (9.8)	RH916DC	RH928AD
5.0 (16.4)	RH916DD	RH928AE
10.0 (32.8)	RH916DE	RH928AF
15.0 (49.2)	RH916DF	RH928AG
20.0 (65.6)	RH916DG	RH928AH
25.0 (82.0)	RH916DH	RH928AJ
30.0 (98.4)	RH916DJ	RH928AK
^(a) P/PVC is polyurethane outer jacket and semi-rigid PVC primary conductor insulation. ^(b) Low smoke zero halogen or low smoke free of halogen (LSZH) is a material classification used for cable jacketing. LSZH is composed of thermoplastic or thermoset compounds that emit limited smoke and no halogen when exposed to high sources of heat. Temperature range: -40 to +105°C (-40 to +221°F).		

Use of Termination Assemblies in 100 Series Upgrade Subsystem


When an FBM201 is used to replace the 100 Series FBM01, it may use any of the appropriate termination assemblies listed above for the FBM01's field I/O wiring. Alternatively, the FBM201 can accept this field wiring through a Termination Assembly Adapter (TAA) instead of a termination assembly. This is discussed in *Termination Assembly Adapter Modules for 100 Series Upgrade* (PSS 41H-2W4).

Dimensions - Nominal

Compression TA: RH916XG, RH922ZM, RH922ZN, RH922ZP

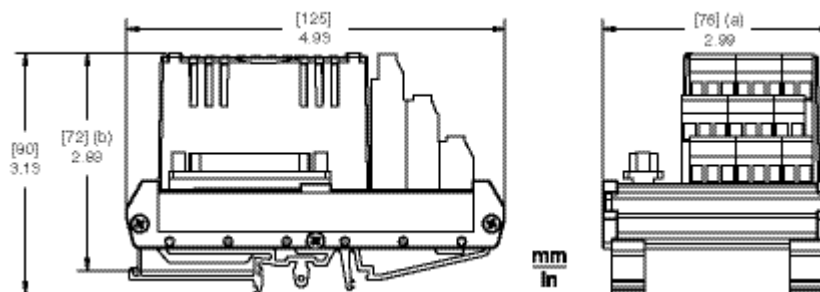

Ring Lug TA: P0917JK, P0926SQ

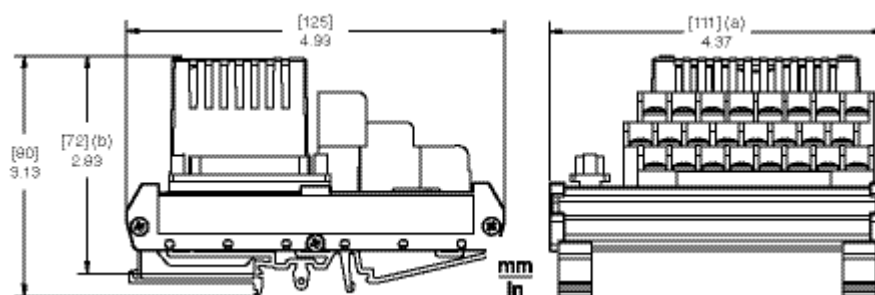


(a) Overall width — for determining DIN rail loading.

(b) Height above DIN rail (add to DIN rail height for total).

Related Product Documents

Document Number	Description
PSS 41H-2SOV	<i>Standard 200 Series Subsystem Overview</i>
PSS 41H-2W100	<i>100 Series Fieldbus Module Upgrade Subsystem Overview</i>
PSS 41H-2CERTS	<i>Standard and Compact 200 Series I/O, Agency Certifications</i>
PSS 41H-2W4	<i>Termination Assembly Adapter Modules for 100 Series Upgrade</i>
PSS 41H-2SBASPLT	<i>Standard 200 Series Baseplates</i>
PSS 41H-2W8	<i>100 Series Conversion Mounting Structures</i>
PSS 41S-3FCPICS	<i>Field Control Processor 280 (CP280) Integrated Control Software</i>
B0400FA	<i>Standard and Compact 200 Series Subsystem User's Guide</i>

 **WARNING:** This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov/.

Schneider Electric Systems USA, Inc.
38 Neponset Avenue
Foxboro, Massachusetts 02035-2037
United States of America

Global Customer Support: <https://pasupport.schneider-electric.com>

As standards, specifications, and design change from time to time, please ask for confirmation of the information given in this publication.

© 2019 Schneider Electric. All rights reserved.

PSS 41H-2S201, Rev A