



Foxboro™ DCS

FBM244, 0 to 20 mA I/O Module with HART® Support

PSS 41H-2S244

Product Specification

August 2019



Legal Information

The Schneider Electric brand and any trademarks of Schneider Electric SE and its subsidiaries referred to in this guide are the property of Schneider Electric SE or its subsidiaries. All other brands may be trademarks of their respective owners.

This guide and its content are protected under applicable copyright laws and furnished for informational use only. No part of this guide may be reproduced or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), for any purpose, without the prior written permission of Schneider Electric.

Schneider Electric does not grant any right or license for commercial use of the guide or its content, except for a non-exclusive and personal license to consult it on an "as is" basis. Schneider Electric products and equipment should be installed, operated, serviced, and maintained only by qualified personnel.

As standards, specifications, and designs change from time to time, information contained in this guide may be subject to change without notice.

To the extent permitted by applicable law, no responsibility or liability is assumed by Schneider Electric and its subsidiaries for any errors or omissions in the informational content of this material or consequences arising out of or resulting from the use of the information contained herein.

Overview

The FBM244 module contains four 0 to 20 mA galvanically isolated analog input and output channels (eight total). The FBM244 supports any mix of standard 4 to 20 mA devices and HART devices.

Each input channel accepts an analog sensor input such as a 4 to 20 mA transmitter or a self-powered 20 mA source. Each output channel drives an external load and produces a 0 to 20 mA output.

The module performs the signal conversion required to interface the electrical input/output signals from the field sensors and actuators to the redundant Fieldbus.

This module executes the analog I/O application program. The configurable options for this program are Fail-Safe Configuration (Hold/Fallback), Analog Output Fail-Safe Fallback Data, (on a per channel basis), Fieldbus Switching Enable, and Fieldbus Switching Time. The module does not provide DPIDA support.

Features

- Four 0 to 20 mA analog input channels, used for a HART analog sensor input such as a 4 to 20 mA transmitter or a self-powered 20 mA source
- Four analog output channels, used to drive an external load and produce a 0 to 20 mA output
- Support for the HART universal commands necessary to interface the field device with the EcoStruxure™ Foxboro DCS™ database
- Both inputs and outputs are galvanically isolated
- Rugged design suitable for enclosure in Class G3 (harsh) environments
- Termination Assemblies (TAs) for locally or remotely connecting field wiring to the FBM244
- Termination Assemblies for per channel internally and/or externally loop powered transmitters

Standard Design

The FBM244 module has a rugged extruded aluminum exterior for physical protection of the circuits. Enclosures specially designed for mounting the Foxboro DCS Fieldbus Modules (FBMs) provide various levels of environmental protection, up to harsh environments (Class G3) per ISA Standard S71.04.

Easy Removal/Replacement

The modules can be removed/replaced without removing field device termination cabling, power or communications cabling.

Visual Indicators

Light-emitting diodes (LEDs) incorporated into the front of the modules provide visual status indications of FBM functions.

Modular Baseplate Mounting

The modules mount on a modular baseplate or conversion mounting structure which accommodates up to four or eight FBMs. The modular baseplate is either DIN rail mounted or rack mounted, and includes signal connectors for redundant fieldbus, redundant independent dc power, and termination cables.

Fieldbus Communication

A Fieldbus Communication Module or a Control Processor interfaces the redundant 2 Mbps module Fieldbus used by the FBMs. The FBM244 module accepts communication from either path (A or B) of the redundant 2 Mbps fieldbus. If one path is unsuccessful or is switched at the system level, the module continues communication over the active path.

Termination Assembly

Field I/O signals connect to the FBM subsystem via a DIN rail mounted termination assembly. The TA used with the FBM244 modules is described in *Termination Assemblies and Cables, page 11*.


Functional Specifications

Supported Hart Instrument Types	HART instruments compliant to Version 5, 6, or 7 of the HART specifications may be used.
Input Channels	<ul style="list-style-type: none"> • Input: 4 isolated and independent channels • Input Range (Each Channel): 0 to 20.4 mA dc • Accuracy: $\pm 0.03\%$ of span • Communication: Via a redundant Fieldbus • Input Connections: Two configurations (see <i>Figure 1</i>)
Output Channels	<ul style="list-style-type: none"> • Output: 4 isolated and independent channels • Output Range (Each Channel): 0 to 20.4 mA dc • Output Load (Maximum): 735 Ω • Compliance Voltage: 18.6 V nominal at 20 mA dc at I/O field terminals • Accuracy: $\pm 0.05\%$ of span (25°C) between 4-20 mA • Output Temperature Coefficient: 100 ppm/°C • Communication: Via a redundant Fieldbus • Settling Time: 100 ms to settle within a 1% band of steady state for a 10 to 90% input step change • Linearity Error: $\pm 0.025\%$ of span (monotonic) • Resolution: 12 bits
Input Channel Isolation	Each channel is galvanically isolated from all other channels and earth (ground). The module/TA withstands, without damage, a potential of 600 V ac applied for one minute between any channel and ground, or between a given channel and any other channel.

	<div style="text-align: center;">⚡⚠ DANGER</div> <p>HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH</p> <p>This does not imply that these channels are intended for permanent connection to voltages of these levels. Exceeding the limits for input voltages, as stated elsewhere in this specification, violates electrical safety codes and may expose users to electric shock.</p> <p>Failure to follow these instructions will result in death or serious injury.</p>
Fastest Allowed ECB Block Period	100 msec - However, it is recommended that you refer to the <i>Sizing Guidelines and Excel Workbook</i> appropriate for your Control Processor to determine the optimal loading for a 100 msec Block Processing Cycle (BPC).
Calibration Requirements	Calibration of the module and termination assembly is not required.
Regulatory Compliance: Electromagnetic Compatibility (EMC):	<ul style="list-style-type: none"> • <i>European EMC Directive 2004/108/EC (Prior to April 20, 2016) and 2014/30/EU (Beginning April 20, 2016):</i> Meets: EN61326-1:2013 Class A Emissions and Industrial Immunity Levels

Regulatory Compliance: Product Safety	<ul style="list-style-type: none"><i>Underwriters Laboratories (UL) for U.S. and Canada:</i> UL/UL-C listed as suitable for use in UL/ULC listed Class I, Groups A-D; Division 2; temperature code T4 enclosure based systems when connected to specified Foxboro DCS processor modules. Communications circuits also meet the requirements for Class 2 as defined in Article 725 of the National Electrical Code (NFPA No.70) and Section 16 of the Canadian Electrical Code (CSA C22.1). For more information, see <i>Standard and Compact 200 Series Subsystem User's Guide</i> (B0400FA).<i>European Low Voltage Directive 2006/95/EC (Prior to April 20, 2016) and 2014/35/EU (Beginning April 20, 2016) and Explosive Atmospheres (ATEX) directive 94/9/EC (Prior to April 20, 2016) and 2014/34/EU (Beginning April 20, 2016)</i> DEMKO certified as Ex nA IIC T4 for use in certified Zone 2 enclosure when connected to specified processor modules as described in the <i>Standard and Compact 200 Series Subsystem User's Guide</i> (B0400FA). Also, see <i>Table 1</i>.
Marine Certification	ABS Type Approved and Bureau Veritas Marine certified for Environmental Category EC31.
RoHS Compliance	Complies with European RoHS Directive 2011/65/EU, including amending Directives 2015/863 and 2017/2102.

Figure 1 - Input Connections

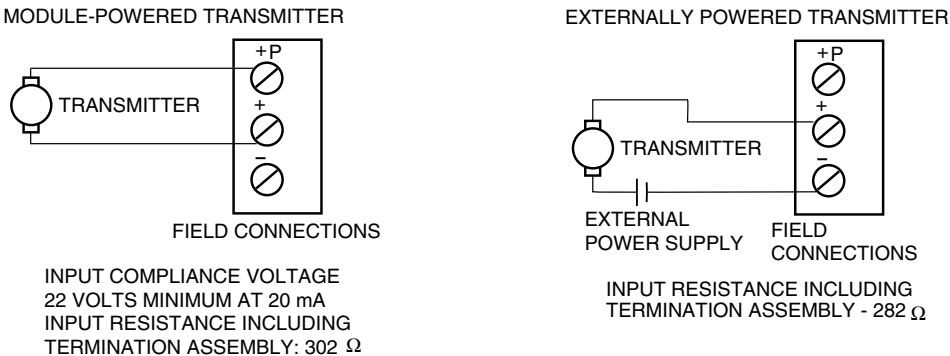

Environmental Specifications

	Operating	Storage
Temperature	<ul style="list-style-type: none">• FBM244: -20 to +70°C (-4 to +158°F)• Termination Assembly: -20 to +70°C (-4 to +158°F)	-40 to +70°C (-40 to +158°F)
Relative Humidity	5 to 95% (noncondensing)	5 to 95% (noncondensing)
Altitude	-300 to +3,000 m (-1,000 to +10,000 ft)	-300 to +12,000 m (-1,000 to +40,000 ft)
Vibration	7.5 m/s ² (0.75 g) from 5 to 500 Hz	
Contamination	Suitable for use in Class G3 (Harsh) environments as defined in ISA Standard S71.04, based on exposure testing according to EIA Standard 364-65, Class III.	

NOTE: The environmental limits of this module may be enhanced by the type of enclosure containing the module. Refer to the applicable Product Specification Sheet (PSS) that describes the specific type of enclosure that is to be used.

Physical Specifications

Mounting	<ul style="list-style-type: none"> FBM244: The modules mount on a modular baseplate or a 100 Series conversion mounting structure. The baseplate can be mounted on a DIN rail (horizontally or vertically), or horizontally on a 19-inch rack using a mounting kit. Alternatively, the modules mount on a 100 Series conversion mounting structure. Refer to <i>Standard 200 Series Baseplates</i> (PSS 41H-2SBASPLT) or <i>100 Series Conversion Mounting Structures</i> (PSS 41H-2W8) for details. Termination Assembly: The TA mounts on a DIN rail and accommodates multiple DIN rail styles including 32 mm (1.26 in) and 35 mm 1.38 in).
Weight	<ul style="list-style-type: none"> FBM244: 284 g (10 oz) approximate Termination Assembly: 181 g (0.40 lb) approximate
Dimensions - FBM244	<ul style="list-style-type: none"> Height: 102 mm (4 in), 114 mm (4.5 in) including mounting lugs Width: 45 mm (1.75 in) Depth: 104 mm (4.11 in)
Dimensions - Termination Assemblies	Refer to <i>Dimensions - Nominal</i> , page 14.
Part Numbers	<ul style="list-style-type: none"> FBM244: RH927AK Termination Assemblies: See <i>Functional Specifications - Termination Assemblies</i>, page 12

Termination Cables	<ul style="list-style-type: none">• Cable Lengths: Up to 30 m (98 ft)• Cable Materials: Polyurethane or Low Smoke Zero Halogen (LSZH)• Termination Cable Type: Type 1 - See <i>Table 2</i>• Cable Connection:<ul style="list-style-type: none">◦ FBM Baseplate End: 37-pin D-subminiature◦ Termination Assembly End: 25-pin D-subminiature
Termination Assembly Construction Material	Polyamide (PA), compression
Field Termination Connections	<ul style="list-style-type: none">• Compression-Type Accepted Wiring Sizes:<ul style="list-style-type: none">◦ Solid/Stranded/AWG: 0.2 to 4 mm²/0.2 to 2.5 mm²/24 to 12 AWG◦ Stranded with Ferrules: 0.2 to 2.5 mm² with or without plastic collar

Termination Assemblies and Cables

Field input signals connect to the FBM subsystem via DIN rail mounted Termination Assemblies. The TA for the FBM244 module is available as a compression screw type using Polyamide (PA) material.

See *Functional Specifications - Termination Assemblies*, page 12 for the TA used with the FBM244 modules.

A removable termination cable connects the DIN rail mounted TA to the FBM via a field connector on the baseplate in which the FBM is installed. Termination cables are available in the following materials:

- Polyurethane
- Low Smoke Zero Halogen (LSZH)

Termination cables are available in a variety of lengths, up to 30 meters (98 feet), allowing the Termination Assembly to be mounted in either the enclosure or in an adjacent enclosure. See *Table 2* for a list of termination cables used with the TA for the FBM244 modules.

Functional Specifications - Termination Assemblies

FBM Type	Input Signal	TA Part Number ^(a)	Termination Type ^(b)	TA Cable Type ^(c)	TA Cert. Type ^(d)
		PA			
FBM244	Four input and four output channels, 4 to 20 mA analog signal, from HART devices	RH924QU RH924QZ	C	1	1, 2

(a) PA is polyamide rated from -20 to +70°C (-4 to +158°F).

(b) C = TA with compression terminals.

(c) See *Table 2* for cable part numbers and specifications.

(d) See *Table 1* for Termination Assembly certification definitions.

Table 1 - Certification for Termination Assemblies

Type	Certification ^(a)
Type 1	TAs are UL/UL-C listed as suitable for use in Class I; Groups A-D; Division 2 temperature code T4 hazardous locations. They are DEMKO certified EEx nA [nL] IIC T4 for use in Zone 2 potentially explosive atmospheres.
Type 2	TAs are UL/UL-C listed as associated apparatus for supplying non-incendive field circuits Class I; Groups A-D; Division 2 hazardous locations when connected to specified 200 Series FBMs and field circuits meeting entity parameter constraints specified in <i>Standard and Compact 200 Series Subsystem User's Guide</i> (B0400FA). They are also DEMKO certified as associated apparatus for supplying field circuits for Group IIC, Zone 2 potentially explosive atmospheres. Field circuits are also Class 2 limited energy (60 V dc, 30 V ac, 100 VA or less) if customer-supplied equipment meets Class 2 limits.
(a) All TAs are UL/UL-C listed to comply with applicable ordinary location safety standards for fire and shock hazards. Hazardous location types comply with ATEX directive for II 3 G use. They also comply with the requirements of the European Low Voltage Directive. All listings/certifications require installation and use within the constraints specified in <i>Standard and Compact 200 Series Subsystem User's Guide</i> (B0400FA) and the conditions stated in UL and DEMKO reports.	

Table 2 - Cable Types and Part Numbers


Cable Length m (ft)	Type 1 P/PVC^(a)	Type 1 LSZH^(b)
0.5 (1.6)	RH916DA	RH928AA
1.0 (3.2)	RH916DB	RH928AB
2.0 (6.6)	RH931RM	RH928AC
3.0 (9.8)	RH916DC	RH928AD
5.0 (16.4)	RH916DD	RH928AE
10.0 (32.8)	RH916DE	RH928AF
15.0 (49.2)	RH916DF	RH928AG
20.0 (65.6)	RH916DG	RH928AH
25.0 (82.0)	RH916DH	RH928AJ
30.0 (98.4)	RH916DJ	RH928AK
<p>^(a) P/PVC is polyurethane outer jacket and semi-rigid PVC primary conductor insulation.</p> <p>^(b) Low smoke zero halogen or low smoke free of halogen (LSZH) is a material classification used for cable jacketing. LSZH is composed of thermoplastic or thermoset compounds that emit limited smoke and no halogen when exposed to high sources of heat. Temperature range: -40 to +105°C (-40 to +221°F).</p>		

Upgrade Use of Termination Assemblies

When an FBM244 is used to replace the 100 Series FBM04, it may use any of the appropriate termination assemblies listed above for the FBM244's field I/O wiring. Alternatively, the FBM244 can accept this field wiring through a Termination Assembly Adapter (TAA) instead of a termination assembly. This is discussed in *Termination Assembly Adapter Modules for 100 Series Upgrade* (PSS 41H-2W4).

Dimensions - Nominal


Figure 2 - Termination Assembly (Compression) RH924QU, RH924QZ

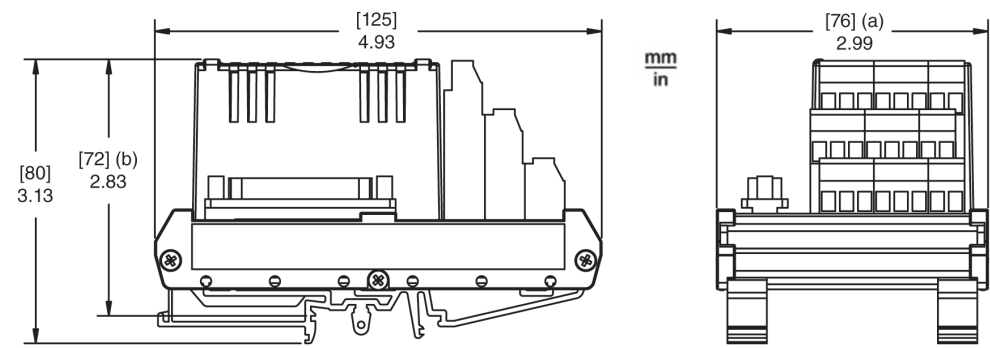

- (a) Overall width — for determining DIN rail loading.
- (b) Height above DIN rail (add to DIN rail height for total).

Related Product Documents

Document Number	Description
PSS 41H-2SOV	<i>Standard 200 Series Subsystem Overview</i>
B0400FA	<i>Standard and Compact 200 Series Subsystem User's Guide</i>
PSS 41H-2W100	<i>100 Series Fieldbus Module Upgrade Subsystem Overview</i>
PSS 41H-2CERTS	<i>Standard and Compact 200 Series I/O - Agency Certifications</i>
PSS 41H-2W4	<i>Termination Assembly Adapter Modules for 100 Series Upgrade</i>
PSS 41H-2SBASPLT	<i>Standard 200 Series Baseplates</i>
PSS 41H-2W8	<i>100 Series Conversion Mounting Structures</i>
PSS 41S-3FCPICS	<i>Field Control Processor 280 (FCP280) Integrated Control Software</i>

 **WARNING:** This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov/.

Schneider Electric Systems USA, Inc.
38 Neponset Avenue
Foxborough, Massachusetts 02035–2037
United States of America

Global Customer Support: <https://pasupport.schneider-electric.com>

As standards, specifications, and design change from time to time, please ask for confirmation of the information given in this publication.

© 2015–2019 Schneider Electric. All rights reserved.

PSS 41H-2S244, Rev A