



**Foxboro™ DCS**

## **Compact FBM212 Thermocouple/mV Differential Input Module**

**PSS 41H-2C212**

**Product Specification**

**August 2019**



# Legal Information

The Schneider Electric brand and any trademarks of Schneider Electric SE and its subsidiaries referred to in this guide are the property of Schneider Electric SE or its subsidiaries. All other brands may be trademarks of their respective owners.

This guide and its content are protected under applicable copyright laws and furnished for informational use only. No part of this guide may be reproduced or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), for any purpose, without the prior written permission of Schneider Electric.

Schneider Electric does not grant any right or license for commercial use of the guide or its content, except for a non-exclusive and personal license to consult it on an "as is" basis. Schneider Electric products and equipment should be installed, operated, serviced, and maintained only by qualified personnel.

As standards, specifications, and designs change from time to time, information contained in this guide may be subject to change without notice.

To the extent permitted by applicable law, no responsibility or liability is assumed by Schneider Electric and its subsidiaries for any errors or omissions in the informational content of this material or consequences arising out of or resulting from the use of the information contained herein.

# Overview

The Compact FBM212, Differential Thermocouple/mV Input Module contains 14 differentially isolated thermocouple input channels, and one differentially isolated RTD reference junction temperature compensation channel (for terminal temperature sensing). Each thermocouple/mV channel accepts standard thermocouples for various temperature ranges, and each provides thermocouple burnout detection (up-scale). Each channel has a differential input to allow voltage differences between channels without introducing detected errors.

The Compact FBM212 performs the signal conversion required to interface the electrical input signals from the field sensors to the optionally redundant Fieldbus. It executes an analog input application program, which provides configurable options for Conversion Time and Rate of Change Limits.

## Features

- 14 channels for input of thermocouple signals
- 1 isolated RTD reference junction compensation channel (for terminal temperature sensing)
- Each channel has a differential input
- Compact, rugged design suitable for enclosure in Class G3 (harsh) environments
- Execution of an analog input application program that provides conversion time and configurable options for Rate of Change Limits
- High accuracy achieved by sigma-delta data conversions for each channel
- Termination Assemblies (TAs) for locally or remotely connecting field wiring to the Compact FBM212

## High Accuracy

For high accuracy, the module incorporates a multiplexed Sigma-Delta converter, which can provide new analog input readings every 500 ms, and a configurable integration period to remove any process noise and power line frequencies. Each update time period, the Foxboro DCS Fieldbus Module (FBM) converts each analog input to a digital value, averages these values over the time period and provides the averaged value to the controller.

## Compact Design

The Compact FBM212's design is narrower than the standard 200 SeriesFBMs. It has a rugged Acrylonitrile Butadiene Styrene (ABS) exterior for physical protection of the circuits. Enclosures specially designed for mounting the FBMs provide various levels of environmental protection, up to harsh environments, per ISA Standard S71.04.

## Visual Indicators

LEDs incorporated into the front of the module provide visual status indications.

## Easy Removal/Replacement

The module mounts on a Compact 200 Series baseplate. Two screws on the FBM fix each module to the baseplate.

The module can be removed/replaced without removing field device termination cabling, power, or communication cabling.

## Fieldbus Communication

A Fieldbus Communications Module or a Control Processor interfaces to the redundant 2 Mbps module Fieldbus used by the FBMs. The Compact FBM212 accepts communication from either path (A or B) of the 2 Mbps Fieldbus. If one path is unsuccessful or is switched at the system level, the module continues communication over the active path.

## Modular Baseplate Mounting

The module mounts on a Compact 200 Series baseplate that is either DIN rail mounted or rack mounted horizontally and includes signal connectors for redundant Fieldbus, redundant independent dc power, and termination cables. Two screws on each FBM fix the module to the Compact 200 Series baseplate.

## Termination Assemblies

Field I/O signals connect to the FBM subsystem via DIN rail mounted TAs. The TAs used with the Compact FBM212 are described in *Termination Assemblies and Cables*, page 10.

## Functional Specifications

Input	14 group isolated differential thermocouple/mV input channels and one reference junction temperature compensation channel.
Input Range	-10.5 to +69.5 mV dc (-10.5 to +69.5 mV dc equals 0 to 64000 raw counts. Inputs of 71.419 mV dc equals 65535 raw counts (full range of module)).
Reference Junction	3-wire 100 ohm platinum RTD (IEC 751, Class B) is internally provided at the termination assembly. Channel 15 is the cold junction compensation channel. The RTD is in the TA and is not customer accessible.
Accuracy	<ul style="list-style-type: none"> <li>• Millivolt Input: ±0.03% of span (±27 µV) at 25°C</li> <li>• RTD Channel: ±0.03% of span</li> <li>• RTD Reference Junction Conformity: ±0.25°C</li> <li>• Thermocouple Conformity: ±0.25°C</li> <li>• Accuracy Temperature Coefficient: ±50 ppm/°C</li> <li>• RTD Reference Junction Measurement Accuracy<sup>(b)</sup>: ±0.50°C (When using the RTD internal to the Foxboro-supplied termination blocks)</li> <li>• Differential Input Impedance: 10 MΩ</li> <li>• Common Mode Voltage: ±2.5 V dc or peak ac between channels</li> </ul>
Input Signal A/D Conversion	Each channel performs A/D signal conversion using a multiplexed Sigma-Delta converter.
Input Conversion Time	Software configurable
Input Open Circuit Voltage	2.5 V dc (mV channels)
Typical Thermocouple Types	B, E, J, K, N, R, S, T, and other millivolt signals. The thermocouples cannot be grounded. For grounded thermocouple applications, the FBM202 and its associated termination assembly must be used.
Input Channel Isolation	<p>Each channel has a differential input to allow voltage differences between channels without introducing detected errors. The channels are not galvanically isolated from each other, but are galvanically isolated from ground and module logic. The module withstands, without damage, a potential of 600 V ac applied for one minute between the differentially isolated channels and ground.</p> <div style="background-color: black; color: white; text-align: center; padding: 5px;"> <b>⚠⚠ DANGER</b> </div> <div style="border: 1px solid black; padding: 5px;"> <b>HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH</b>             This does not imply that these channels are intended for permanent connection to voltages of these levels. Exceeding the limits for input voltages, as stated elsewhere in this specification, violates electrical safety codes and may expose users to electric shock.   <b>Failure to follow these instructions will result in death or serious injury.</b> </div>

Communication	Communicates with its associated FCM or FCP via the redundant 2 Mbps module Fieldbus.
Power Requirements	<ul style="list-style-type: none"> <li>• Input Voltage Range (Redundant): 24 V dc +5%, -10%</li> <li>• Consumption: 3 W (maximum) at 24 V dc</li> <li>• Heat Dissipation: 3 W (maximum) at 24 V dc</li> </ul>
Calibration Requirements	Calibration of the module and termination assembly is not required.
Regulatory Compliance: Electromagnetic Compatibility (EMC)	<ul style="list-style-type: none"> <li>• <i>European EMC Directive 2004/108/EC (Prior to April 20, 2016) and 2014/30/EU (Beginning April 20, 2016)</i> Meets: EN61326-1:2013 Class A Emissions and Industrial Immunity Levels</li> </ul>
Regulatory Compliance: Product Safety	<ul style="list-style-type: none"> <li>• <i>Underwriters Laboratories (UL) for U.S. and Canada:</i> UL/UL-C listed as suitable for use in UL/ULC listed Class I, Groups A-D; Division 2; temperature code T4 enclosure based systems when connected to specified processor modules. Communications circuits also meet the requirements for Class 2 as defined in Article 725 of the National Electrical Code (NFPA No.70) and Section 16 of the Canadian Electrical Code (CSA C22.1). For more information, see <i>Standard and Compact 200 Series Subsystem User's Guide (B0400FA)</i>.</li> <li>• <i>European Low Voltage Directive 2006/95/EC (Prior to April 20, 2016) and 2014/35/EU (Beginning April 20, 2016) and Explosive Atmospheres (ATEX) directive 94/9/EC (Prior to April 20, 2016) and 2014/34/EU (Beginning April 20, 2016):</i> DEMKO certified as Ex nA IIC T4 for use in certified Zone 2 enclosure when connected to specified processor modules as described in the <i>Standard and Compact 200 Series Subsystem User's Guide (B0400FA)</i>.</li> </ul>
RoHS Compliance	Complies with European RoHS Directive 2011/65/EU, including amending Directives 2015/863 and 2017/2102.

## Environmental Specifications

	Operating	Storage
Temperature	<ul style="list-style-type: none"><li>Module: -20 to +60°C (-4 to +140°F)</li><li>Termination Assembly - PA: -20 to +70°C (-4 to +158°F)</li></ul>	-40 to +70°C (-40 to +158°F)
Relative Humidity	5 to 95% (noncondensing)	5 to 95% (noncondensing)
Altitude	-300 to +3,000 m (-1,000 to +10,000 ft)	-300 to +12,000 m (-1,000 to +40,000 ft)
Contamination	Suitable for use in Class G3 (Harsh) environments as defined in ISA Standard S71.04, based on exposure testing according to EIA Standard 364-65, Class III.	
Vibration	7.5 m/s <sup>2</sup> from 5 to 500 Hz	

**NOTE:** The environmental limits of this module may be enhanced by the type of enclosure containing the module. Refer to the applicable Product Specification Sheet (PSS) that describes the enclosure to be used.

## Physical Specifications

Mounting	<ul style="list-style-type: none"> <li>Module: The Compact FBM212 mounts on a Compact 200 Series 16-slot horizontal baseplate. The baseplate can be mounted on a horizontal DIN rail, or horizontally on a 19-inch rack using a mounting kit.. See <i>Compact 200 Series 16-Slot Horizontal Baseplate</i> (PSS 41H-2C200) for details.  For applications which require CE certification, the baseplate and power supplies must be installed in a metal rack. Open wall mounting in that case is not allowed.</li> <li>Termination Assembly: The TA mounts on a DIN rail and accommodates multiple DIN rail styles including 32 mm (1.26 in) and 35 mm 1.38 in).</li> </ul>
Weight	<ul style="list-style-type: none"> <li>Module: 185 g (6.5 oz) approximate</li> <li>Termination Assemblies: <ul style="list-style-type: none"> <li>Compression: 272 g (0.60 lb, approximate)</li> <li>Ring Lug: 263 g (0.80 lb, approximate)</li> </ul> </li> </ul>
Dimensions - Module	<ul style="list-style-type: none"> <li>Height: 130 mm (5.12 in)</li> <li>Width: 25 mm (0.98 in)</li> <li>Depth: 150 mm (5.9 in) - Including baseplate connectors, 139 mm (5.46 in)</li> </ul>
Dimensions - Termination Assemblies	See <i>Dimensions — Nominal, page 13</i>
Part Numbers	<ul style="list-style-type: none"> <li>Compact FBM212 Module: RH101GF</li> <li>Termination Assemblies: See <i>Functional Specifications — Termination Assemblies, page 11</i>.</li> </ul>
Termination Cables	<ul style="list-style-type: none"> <li>Cable Lengths: Up to 30 m (98 ft)</li> <li>Cable Materials: Polyurethane or Low Smoke Zero Halogen (LSZH)</li> <li>Termination Cable Type: Type 1 — See <i>Table 2, page 12</i>.</li> <li>Cable Connection: 37-pin male D-subminiature</li> </ul>



Construction - Termination Assembly	<ul style="list-style-type: none"><li>• Material: Polyamide (PA), compression</li><li>• Terminal Blocks: Inputs - 2 tiers, 14 positions</li></ul>
Field Termination Connections	<ul style="list-style-type: none"><li>• Compression Accepted Wiring Sizes:<ul style="list-style-type: none"><li>◦ Solid/Stranded/AWG: 0.2 to 4 mm<sup>2</sup>/0.2 to 2.5 mm<sup>2</sup>/24 to 12 AWG</li><li>◦ Stranded with Ferrules: 0.2 to 2.5 mm<sup>2</sup> with or without plastic collar</li></ul></li><li>• Ring Lug Accepted Wiring Sizes: #6 size connectors (9.5 mm (0.375 in)) 0.5 to 4 mm<sup>2</sup>/22 AWG to 12 AWG</li></ul>

## Termination Assemblies and Cables

Field I/O signals connect to the FBM subsystem via DIN rail mounted termination assemblies, which are electrically passive. TAs for the Compact FBM212 are available in these forms:

- Compression screw type using Polyamide (PA) material

Each Compact FBM212 Termination Assembly and its associated termination cable provide feedthrough connection between fourteen 2-wire thermocouple/mV analog input signals and the Compact FBM212. The thermocouples cannot be grounded. For grounded thermocouple applications, the Compact FBM202 and its associated termination assembly must be used.

Reference junction temperature compensation is provided by an isolated resistance temperature detector (RTD) that is integral to the termination assembly.

See *Functional Specifications — Termination Assemblies, page 11* for a list of TAs used with the Compact FBM212.

A removable termination cable connects the DIN rail mounted TA to the FBM via a field connector on the baseplate in which the FBM is installed. Termination cables are available in the following materials:

- Polyurethane
- Low Smoke Zero Halogen (LSZH)

Termination cables are available in a variety of lengths, up to 30 meters (98 feet), allowing the termination assembly to be mounted in either the enclosure or in an adjacent enclosure. See *Table 2, page 12* for a list of termination cables used with the TAs for the Compact FBM212.

## Functional Specifications - Termination Assemblies

FBM Type	Input Signal	TA Part Number <sup>(a)</sup>	Termination Type <sup>(b)</sup>	TA Cable Type <sup>(c)</sup>	TA Cert. Type <sup>(d)</sup>
		PVC			
Compact FBM212	Fourteen isolated and independent thermocouple/ mV channels, passive feedthrough with FBM212 channel isolation with one 4-wire 100 ohm platinum RTD (IEC 751, Class B)	RH916BV	C	4	1,4
<p>(a) PA is polyamide rated from -20 to +70°C (-4 to +158°F).</p> <p>(b) C = TA with compression terminals; RL = TA with ring lug terminals.</p> <p>(c) See <i>Table 2, page 12</i> for cable part numbers.</p> <p>(d) See <i>Table 1, page 11</i> for Termination Assembly certification definitions.</p>					


**Table 1 - Certification for Termination Assemblies**

Type	Certification <sup>(a)</sup>
Type 1	TAs are UL/UL-C listed as suitable for use in Class I; Groups A-D; Division 2 temperature code T4 hazardous locations. They are DEMKO certified Ex nA IIC T4 Gc for use in Zone 2 potentially explosive atmospheres.
Type 4	All field circuits are Class 2 limited energy (60 V dc, 30 V ac, 100 VA or less) if customer-supplied equipment meets Class 2 limits.

**Table 2 - Termination Cable Types and Part Numbers - Type 4**


<b>Cable Length m (ft)</b>	<b>Type 4 P/PVC<sup>(a)</sup></b>	<b>Type 4 LSZH<sup>(b)</sup></b>
0.5 (1.6)	RH100CJ	RH100BN
1.0 (3.2)	RH100CK	RH100BP
1.5 (4.9)	RH100EQ	RH100EN
2.0 (6.6)	RH100CL	RH100BQ
3.0 (9.8)	RH100CM	RH100BR
5.0 (16.4)	RH100CN	RH100BS
10.0 (32.8)	RH100CP	RH100BT
15.0 (49.2)	RH100CQ	RH100BU
20.0 (65.6)	RH100CR	RH100BV
25.0 (82.0)	RH100CS	RH100BW
30.0 (98.4)	RH100CT	RH100BX
<p><sup>(a)</sup> P/PVC is polyurethane outer jacket and semi-rigid PVC primary conductor insulation. PVC is rated from -20 to +70°C (-4 to +158°F).</p> <p><sup>(b)</sup> Low smoke zero halogen or low smoke free of halogen (LSZH) is a material classification used for cable jacketing. LSZH is composed of thermoplastic or thermoset compounds that emit limited smoke and no halogen when exposed to high sources of heat. Temperature range: - 40 to +105°C (-40 to +221°F).</p>		

## Dimensions - Nominal

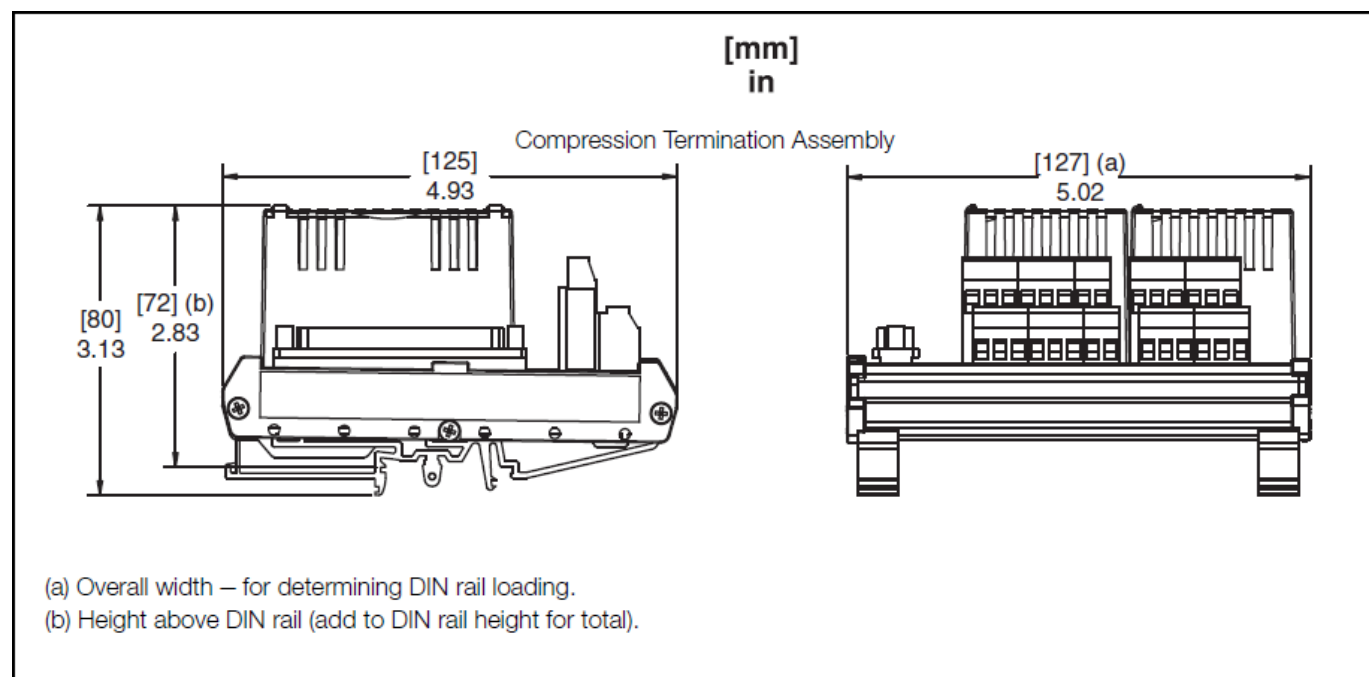

## Related Product Documents

Document Number	Description
PSS 41H-2COV	<i>Compact 200 Series I/O Subsystem Overview</i>
B0400FA	<i>Standard and Compact 200 Series Subsystem User's Guide</i>
PSS 41H-2C200	<i>Compact 200 Series 16-Slot Horizontal Baseplate</i>
PSS 41H-2SOV	<i>Standard 200 Series Subsystem Overview</i>
PSS 41H-2CERTS	<i>Standard and Compact 200 Series I/O - Agency Certifications</i>
PSS 41H-2C480	<i>Compact Power Supply - FPS480-24</i>
PSS 41S-3FCPICS	<i>Field Control Processor 280 (FCP280) Integrated Control Software</i>

 **WARNING:** This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.p65warnings.ca.gov/](http://www.p65warnings.ca.gov/).

Schneider Electric Systems USA, Inc.  
38 Neponset Avenue  
Foxboro, Massachusetts 02035–2037  
United States of America

Global Customer Support: <https://pasupport.schneider-electric.com>

As standards, specifications, and design change from time to time, please ask for confirmation of the information given in this publication.

© 2015–2019 Schneider Electric. All rights reserved.

PSS 41H-2C212, Rev A