




**Foxboro™ DCS**

## Logic (LOGIC) Block

### PSS 41S-3LOGIC

#### Product Specification

**May 2019**

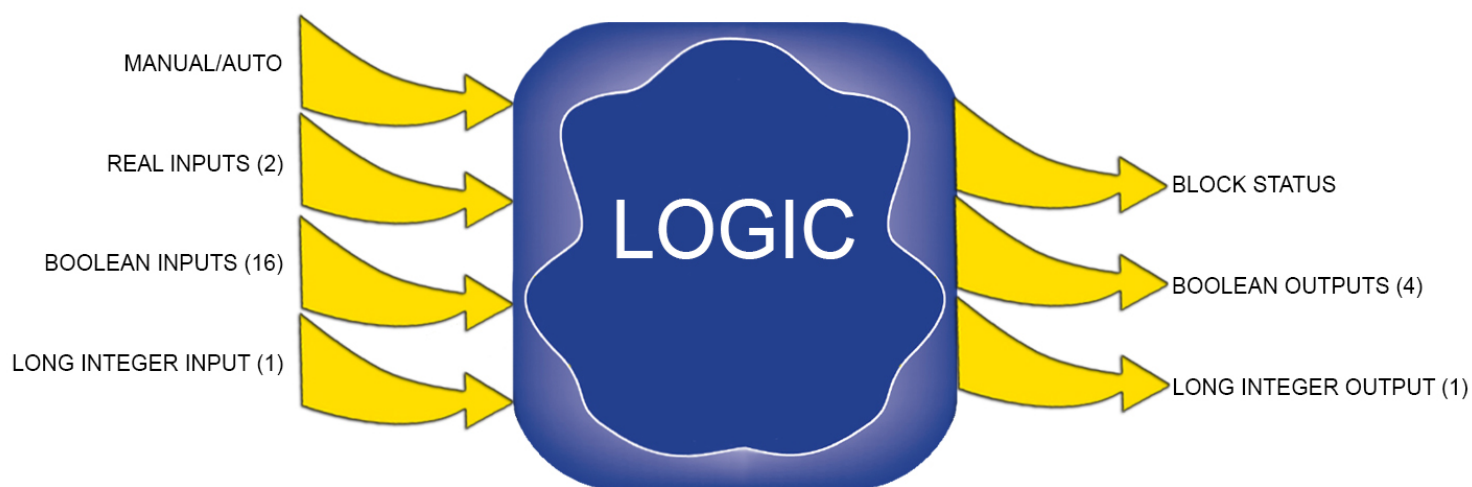

# Legal Information

The Schneider Electric brand and any trademarks of Schneider Electric SE and its subsidiaries referred to in this guide are the property of Schneider Electric SE or its subsidiaries. All other brands may be trademarks of their respective owners.

This guide and its content are protected under applicable copyright laws and furnished for informational use only. No part of this guide may be reproduced or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), for any purpose, without the prior written permission of Schneider Electric.

Schneider Electric does not grant any right or license for commercial use of the guide or its content, except for a non-exclusive and personal license to consult it on an "as is" basis. Schneider Electric products and equipment should be installed, operated, serviced, and maintained only by qualified personnel.

As standards, specifications, and designs change from time to time, information contained in this guide may be subject to change without notice.

To the extent permitted by applicable law, no responsibility or liability is assumed by Schneider Electric and its subsidiaries for any errors or omissions in the informational content of this material or consequences arising out of or resulting from the use of the information contained herein.

# Overview

*The Logic (LOGIC) block is a multiple input, 15-step, programmable block that provides logic, latching, and timer functions to augment the operation of standard blocks.*

The LOGIC block provides functions that can be combined in logic networks: boolean logic, flip-flop, latching, logic delay and timing. These logic networks can range from simple networks with a few gates to complex networks containing multiple gates, latches, and timing elements. The LOGIC block provides optimization of memory resources as well as high speed execution of logic functions.

For increased performance and ease of use, the block supports dual boolean operands in a single programming step. For example, to perform a logical AND of the contents of specified operands, the syntax would be: AND BI01, BI02. All input connections, constant data values, and programming steps are entered via the block configuration process.

## General Features

- Up to 15 programming steps
- 43 programming instructions
- Up to 2 operands per single instruction
- Integer stack to perform operations
- 16 boolean inputs
- 4 boolean outputs
- 5 data storage elements
- Block installation validation check
- Input and output parameter error detection and control
- Auto/Manual output control
- Detection of runtime errors

## Boolean Operations

- Logical AND, OR (inclusive), XOR (exclusive), NOT, NAN, NOR, NXO

## Logic and Timing

- One-shot pulse, set-reset flip-flop, master reset flip-flop
- On-delay timer, off-delay timer

 **WARNING:** This product can expose you to chemicals including lead and lead compounds, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.p65warnings.ca.gov/](http://www.p65warnings.ca.gov/).

Schneider Electric Systems USA, Inc.  
38 Neponset Avenue  
Foxborough, Massachusetts 02035–2037  
United States of America

Global Customer Support: <https://pasupport.schneider-electric.com>

As standards, specifications, and design change from time to time, please ask for confirmation of the information given in this publication.

© 2014–2019 Schneider Electric. All rights reserved.

PSS 41S-3LOGIC, Rev A